JOHN EDGAR HOOVER
DIRECTOR

Federal Bureau of Investigation
United States Department of Justice
Washington, D. C.

RLM:DMS

July 19, 1939

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

MEMORANDUM FOR THE FILE.

Re: Research on Portable Transmitter.

There is attached hereto a schematic diagram of the new 110 volt power supply unit to be used in conjunction with the portable transmitter now being constructed in the Laboratory.

The new power supply weighs 28 pounds and is enclosed in a sturdy leather case. The output of the unit is introduced into the transmitter proper by means of a six-wire cable fitted with the proper connectors. 400 volts direct current, 6 3/10 volts alternating current and 110 volts alternating current are available. The master control switch is to be incorporated in the transmitter itself thereby eliminating any danger of contact with high voltage from the power supply cable. Further memoranda concerning the progress on the transmitter itself will be submitted from time to time.

E. P. Coffey

E. P. Coffey

RECORDED & INDEXED

80-646-X

FILED

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

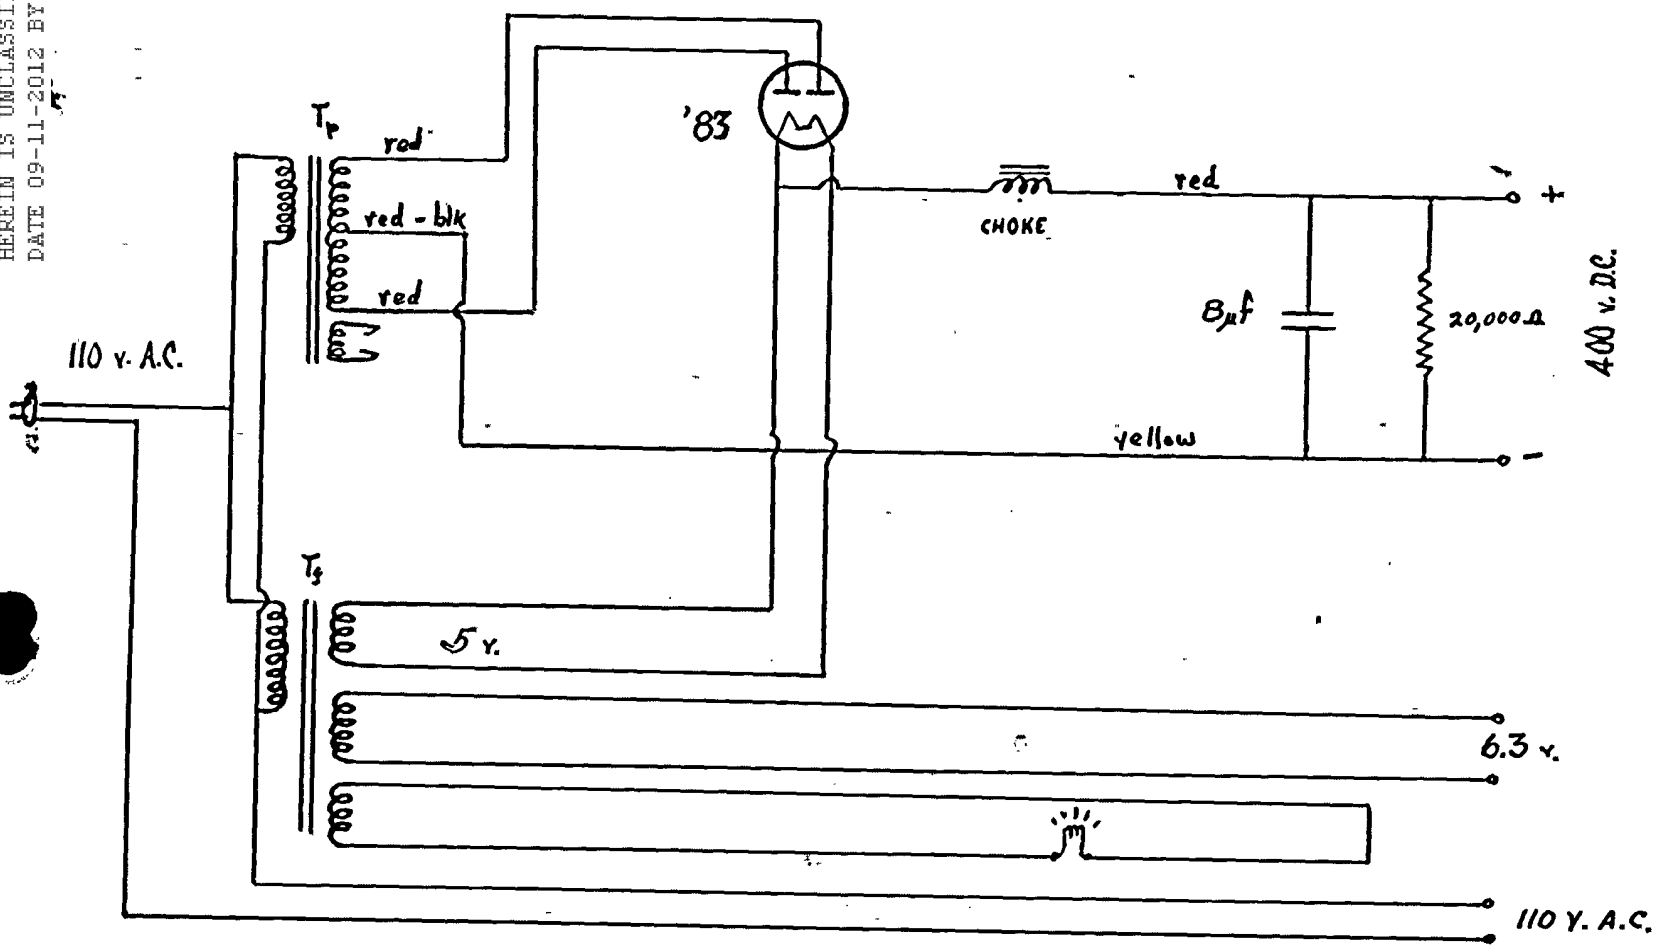

Portable Transmitter Power Supply

JOHN EDGAR HOOVER
DIRECTOR

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

al Bureau of Investigat

United States Department of Justice

Washington, D. C.

DML:GS

March 13, 1940

MEMORANDUM FOR THE DIRECTOR

At a meeting of the Executive Conference held on March 7, 1940, attended by Messrs. Tolson, E. A. Tamm, Nathan, Glavin, Nichols, Rosen, Quinn Tamm and Ladd, the request of the Technical Laboratory for the purchase of a Boehme Portable Type 10-G tape recorder for use in recording high speed Morse Code transmissions over the radio was considered, and it was the opinion of Messrs. Tolson, Nathan, E. A. Tamm, Q. Tamm and Ladd that this equipment should be purchased in order that it would be available for any future cases in which it was necessary to receive and translate high speed wireless telegraphy, Mr. Nathan and Mr. Tolson being in favor of the purchase of this equipment based on the recommendation of the Laboratory and without independent knowledge of their own with reference to the value of this type of equipment. Messrs. Glavin, Nichols and Rosen were opposed to the purchase of this equipment.

It was pointed out that in connection with the most recent attempts to monitor radio stations in the espionage cases presently under investigation in the New York District such equipment would have been extremely valuable.

It is believed this equipment will cost in the neighborhood of $900.00.

Respectfully,
For the Conference

Clyde Tolson, Chairman

RECORDED
&
INDEXED

W. R. Glavin, Secretary

80-446-X1
FEDERAL BUREAU OF INVESTIGATION
MAR 26 1940
U.S. DEPARTMENT OF JUSTICE
TOLSON
TAMM

JOHN EDGAR HOOVER
DIRECTOR

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Bureau of Investigation
United States Department of Justice
Washington, D. C.

EAT:DS

May 31, 1940

54109

MEMORANDUM FOR THE DIRECTOR

The following is a summary of the facts surrounding the establishment by the Bureau of a shortwave radio station for use before the Appropriations Committee.

The Bureau's informant in this case is Wilhelm Gottlieb Sebold. Sebold came to the United States from Germany under instructions from the Chief of the German Espionage System to contact several German Espionage agents. Sebold also was instructed to establish a shortwave radio station with which he could communicate with Hamburg, Germany. Sebold had formerly resided in the United States and the Bureau was able to secure his services as an informant. Working through Sebold, the Bureau established at Centerport, Long Island, New York a 1,000 watt shortwave radio station. A Bureau Agent acts as the operator of this station and all messages are transmitted by International Morse code. The messages transmitted, however, are not in either German or English but are reduced to a complicated five-letter code through the use of a current best-seller (All This and Heaven Too, by Rachel Field). The code is predicated upon the selection of a page in the book by adding the day of the month upon which the message is transmitted to the numerical value of the month of the year, plus twenty, the latter being an arbitrary figure. Thereafter, from the page selected by this method, a complicated system has been worked out of assigning numerical values to the letters as they appear on the page and then transposing these numerals back into letters through a columnar arrangement.

The Bureau station has been in touch with Hamburg on several occasions since it has been in operation, the contacts being made always at night. Several of the German Espionage Agents have brought to our informant messages for transmittal to Hamburg. The contents of the messages

RECORDED & INDEXED
65-646-X2
FEDERAL BUREAU OF INVESTIGATION
AUG 9 1940
U.S. DEPARTMENT OF JUSTICE
TOLSON
65-1746-7011

Copies to Mr. Tolson
5-20-114

invariably checked for approval with the State, War and Navy Departments prior to transmission. In the event any future message is delivered to the Bureau for transmittal, the contents of which message may be considered confidential, the message will be garbled in transcription in such a manner that nothing of a confidential nature will be disclosed and the informant will not be exposed.

Indicative of the type of message being transmitted there is quoted hereafter a message delivered to the informant on the evening of May 29, 1940, for transmittal to Hamburg:

"FREDERICK JOUBERT DUQUESNE, WITH ALIASES, ET AL, ESPIONAGE. FOLLOWING INFORMATION GIVEN INFORMANT TODAY TO BE TRANSMITTED TO EUROPE. 'ROLLS ROYCE HAVE ENGINES DESIGNED TO GO IN THE WINGS FLAT, LIKE MEAT IN A SANDWICH. LYCOMING HAVE ONE ALSO. I SEND BLUEPRINTS BY CHINA. ALLIES ORDERED ADDITIONAL TEN THOUSAND MACHINE GUNS, MOTOR-CYCLES, SIDECARS. US INTELLIGENCE GETTING NEWS THROUGH MYRON TAYLOR IN VATICAN. BELIEVED WORKING FOR CATHOLIC INFORMATION. CANADIANS ADOPTED HAND THROWN SHELL WHICH I WROTE OF. GIVING IMMEDIATE PRODUCTION. SS CHAMPLAIN TAKING MUNITIONS CARGO IN A DAY OR TWO. SHE IS LARGE PASSENGER CARGO LINER, ARMED, ANTI-SUBMARINE, ANTI-AIRCRAFT. MAY RETURN WITH MEMBERS OF FRENCH PURCHASING MISSION. SAILS IN TWO DAYS. WILL BE PICKED UP BY CONVOY OFF BERMUDA. SHE IS GOING TO CHERBOURG. DID YOU RECEIVE US ARMY GAS MASK AND MUSTARD GAS CANISTER ON THE CONTE DE SAVOIA AND THE REX. JIMMY. REGARDS TO NIKKI'. ADVISE IMMEDIATELY IF ANY PART OF MESSAGE OBJECTIONABLE."

Respectfully,

Edward A. Tamm

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

54108

June 5, 1940.

65-4279

Special Agent in Charge
New York, New York

Re: FREDERICK JOUBERT DUQUESNE,
with aliases, et al.;
ESPIONAGE.

Dear Sir:

There is transmitted herewith for the completion of your file a copy of the wiring diagrams prepared for the 1000 watt transmitter recently constructed at the New York Office.

Further in connection with the above-entitled case it is desired that the Berne List of Frequencies which Mr. I. W. Conrad left with Mr. M. H. Price for use in identifying stations heard, be returned to the Bureau's Technical Laboratory as soon as it has served its purpose.

Very truly yours,

John Edgar Hoover
Director

Enclosure

Mr. Tolson
Mr. Nathan
Mr. E. A. Tamm
Mr. Clegg
Mr. Ladd
Mr. Coffey
Mr. Egan
Mr. Glavin
Mr. Harbo
Mr. Nease
Mr. Lester
Mr. Metzire
Mr. Nichols
Mr. Ponalagan
Mr. Rosen
Mr. Colon Tamm
Pers. Files
Adm. Files
Your Room
Mr. Tracy
Miss Gandy

RECORDED 60-646-X3

FEDERAL BUREAU OF INVESTIGATION
JUN 11 1940
U. S. DEPARTMENT OF JUSTICE

JOHN EDGAR HOOVER
DIRECTOR

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Federal Bureau of Investigation
United States Department of Justice
Washington, D. C.

EPC:AF

August 9, 1940

MEMORANDUM FOR MR. LADD

Re: Commander [redacted]
Navy Department Member
of IRAC.

b6
b7C

Commander [redacted] who is the Navy representative on IRAC paid a visit to the Bureau this morning. I showed him through the Laboratory and took him to lunch, after which we talked with you a while and Mr. Hennrich showed him the Fingerprint Division.

Commander [redacted] and I discussed many matters of communication and the policies and politics of the IRAC. [redacted] is very friendly to the Bureau and I think his support can be counted upon in IRAC matters. Among the things he mentioned which may be of interest to the Bureau was the fact that there is some talk going on in IRAC circles concerning the setting up of a coordinated monitoring system for national defense purposes, whereby FCC, the Navy, the Army, and the FBI would pool their resources and arrange for definite and specific monitoring and intercepts on various forms of communication, principally, of course, radio.

b6
b7C

Another thing of possible interest that he mentioned is negotiations now under way which appear to be sponsored by FCC wherein a national defense committee on communications will be set up. The present agitation is to have the present chairman of FCC chairman of the national defense committee on communications. Such a chairman would be very unsatisfactory to the Army and Navy in view of their present joint board for wartime communication control. This latter plan, it will be noted, deals with communications as a whole and the comandeering and coordination of such, thus differing from the monitoring and intercept functions of the committee previously mentioned above. Apparently the Navy is afraid that the President will act in spite of opposition and appoint the chairman of the FCC to create the new national defense communications committee.

Commander [redacted] has invited me to visit the Navy Radio and Sound Research Laboratory at Bellevue. I told him I would be delighted to go and would like to have Mr. Conrad accompany me. He will arrange this visit and notify me.

b6
b7C

RECORDED & INDEXED

80-646-X4

FEDERAL BUREAU OF INVESTIGATION
4 AUG 13 1940
U. S. DEPARTMENT OF JUSTICE

Respectfully,

E. P. Coffey.

LADD HENDON

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RFP:AF

January 15, 1941

54107

AIR MAIL

Special Agent in Charge
Chicago, Illinois

Dear Sir:

There will be forwarded to your office and to each office receiving a copy of this letter, within the very near future, one Super-Pro Hammarlund radio communications receiver for permanent assignment, which instruments are to be placed on the inventory records of the respective offices.

The Hammarlund receiver is of the model 200 X type and is complete with ten-inch speaker, power supply for 110 volts alternating current, one pair of headphones, one set of spare tubes, and one shipping box with auxiliary packing material.

Each of these instruments will be forwarded directly from the Hammarlund Manufacturing Company, Incorporated, New York City.

Very truly yours,

John Edgar Hoover
Director

cc-Atlanta
Kansas City
Los Angeles
Miami
San Francisco
Boston

Tolson
Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Rendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
JAN 16 1941

RECORDED & INDEXED 80-6476-X4

FEDERAL BUREAU OF INVESTIGATION
U.S. Department of Justice

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

ENCLOS

80-642-1

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

HALLICRAFTERS COMMUNICATIONS EQUIPMENT

The New 1941 SUPER SKYRIDER!

The Communications receiver that sets new standards for receiver performance! Frequency range 540 KC to 43 MC in 6 bands.

Two stages of preselection—high fidelity, push pull audio—band pass audio filter—Calibrated band spread—micrometer scale on main dial knob. Heavy gauge steel cadmium plated chassis—standard size relay rack panel ⅛ inch thick—machine tool gray wrinkle finished cabinet well ventilated and attractively designed.

See the 1941 SUPER SKYRIDER and you will know why the HALLICRAFTERS lead in communications equipment value.

The Model SX-28 1941 SUPER SKYRIDER PRICES start at.....NET **$159.50**

The New SKYRIDER 28

GENERAL SPECIFICATIONS

FREQUENCY RANGE:

Band 1— 540 to 1650 KC
Band 2— 1.5 to 3.2 MC
Band 3— 3.0 to 6.2 MC
Band 4— 5.5 to 12.0 MC
Band 5—11.0 to 23.0 MC
Band 6—21.0 to 43.0 MC

TUBE LINEUP:

1—6SK7	1st RF Amplifier
1—6SK7	2nd RF Amplifier
1—6SA7	Mixer
1—6SA7	H.F. Oscillator
1—6L7	1st IF Amplifier—noise limiter
1—6SK7	2nd IF Amplifier
1—6B8	2nd Detector and meter
1—6B8	AVC Amplifier
1—6SK7	Noise Amplifier
1—6H6	Noise Rectifier
1—6J5	B.F.O.
1—6SC7	1st Audio Amplifier
2—6V6GT	Push-Pull output Amplifier
1—5Z3	Rectifier

CONTROLS:

Micrometer scale main tuning inertia controlled
Calibrated band spread inertia controlled
Tone and AC ON-OFF
Beat Frequency Oscillator
A.F. Gain
R.F. Gain
6 Position band switch
Antenna Trimmer
6 Position selectivity control
Crystal phasing
Adjustable noise limiter
Send-Receive Switch
A.V.C.-B.F.O. Switch
Bass boost switch
Phone jack

PHYSICAL CONSTRUCTION:

Chassis substantially constructed of 14 gauge steel with flanged edges and flame welded corners. Condenser cover and coil shield compartments assembled to chassis in box girder type of construction. Brushed cadmium plating protects the chassis and metal components.
A ⅛ inch thick steel panel is used with etched control markings and Morocco finish.
The 8¾" x 19" dimensions of the panel are for standard relay rack mounting.
The Cabinet is made of 16 gauge steel attractively finished in machine tool gray wrinkle. Special consideration in the design of the cabinet was given to provide adequate ventilation.

MECHANICAL FEATURES:

New type inertia-controlled back-lash free dial mechanism on both main tuning and bandspread dials. This mechanism is preloaded and the main shafts are supported at both ends with ball bearings.
The chassis is removed from the front panel and firmly positioned with two brackets which support it without danger of strain or torque.
Both main tuning and band spread condensers are semi-floating and mounted to the chassis at three points.
Components arranged for best electrical efficiency with full consideration for convenience of control mountings.

ELECTRICAL FEATURES:

1—15 tubes
2—6 bands for most satisfactory L/C ratio
3—2 R.F. Stages
4—Push-pull high fidelity, audio output
5—6 step wide range variable selectivity
6—Band pass audio filter
7—Wide angle "S" meter
8—Phono jack
9—Adequate headphone output
10—Improved signal to image and noise ratio
11—80/40/20/10 meter amateur bands calibrated
12—Temperature compensated high frequency oscillator

CABINET DIMENSIONS:

20½" long—14½" deep—9½" high.

The MODEL SX-28 Receiver with crystal and tubes, less speaker .....NET **$159.50**

Hallicrafters Jensen bass-reflex enclosure including 12" speaker 30" high—16" deep—22½" wide—Model R12 ..... **$29.50**

Hallicrafters Jensen bass-reflex enclosure including 8" speaker 23½" high—10¼" deep—17½" wide—Model R8 ..... **$19.50**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

HALLICRAFTERS COMMUNICATIONS EQUIPMENT

The New SUPER DEFIANT SX-25

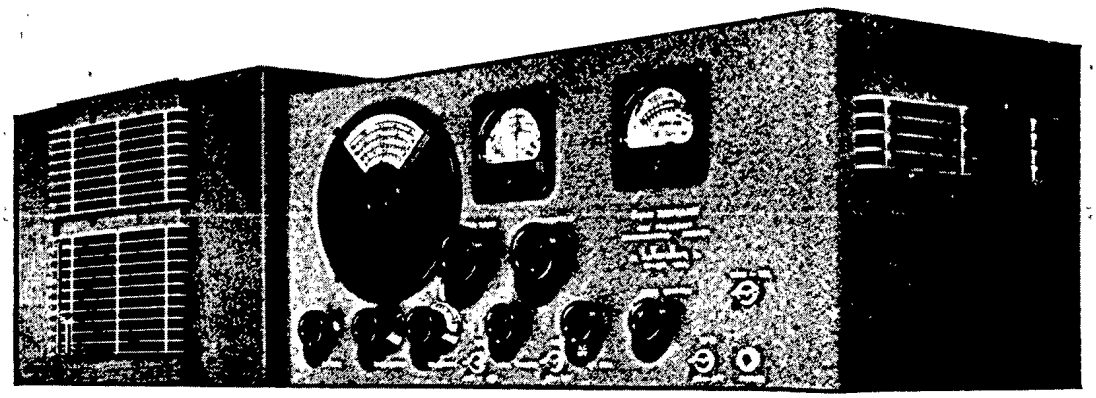

AMATEURS from coast to coast acclaim this new, de luxe model, amateur receiver as the finest ever developed at anywhere near this price. It offers even better performance than that of the famed SX-17. Its general circuit is based on the proved efficiency of America's best selling receiver, the Skyrider DEFIANT.

Among its outstanding advantages are *extreme selectivity* and *more* and *better audio*. The design of the crystal filter makes possible critical CW operation under trying conditions of interference, and, in addition, the sensitivity of the receiver is raised from 2.8 to 4 times in the "CW Xtal" position when the receiver is tuned to the exact resonant frequency of the crystal itself; this means more *usable* sensitivity.

Both IF stages are expanded in the "Broad IF" position for high fidelity performance. An effective AVC or automatic volume control circuit keeps most signals at uniform audibility. The automatic noise limiter reduces interference by as much as 70%. The extremely low noise level of the SUPER DEFIANT makes it sensitive to very weak signals.

Every part is placed for best performance without regard for symmetry or beauty. Being self-contained there are no external units except the speaker. Tuning is effortless. Controls are conveniently located.

The SUPER DEFIANT (Model SX-25)—Complete with Speaker, Crystal and Tubes. Shipping weight 52 lbs..... **$99.50**

Extra for Univ. 110-250 volts, 25-60 cycles.....$5.00

FEATURES

2 Stages of Preselection.

Twelve tubes:

6SK7	—1st RF Amplifier.	6SQ7	—Phase Inverter.
6SK7	—2nd RF Amplifier.	PP-6F6	—2nd audio output stage.
6K8	—1st Detector-Mixer HF Oscillator.	6H6	—Automatic Noise Limiter.
6SK7	—1st IF Amplifier.	6J5GT	—Beat Frequency Oscillator.
6SK7	—2nd IF Amplifier.	80	—Rectifier.
6SQ7	—2nd Detector, AVC, 1st stage of audio.		

Overall Range 540 kc. to 42 mc. in four bands:

1—540 kc.-1700 kc. 3—5.0 mc.-15.5 mc.
2—1.7 mc.-5.1 mc. 4—15.1 mc.-42 mc.

Separate calibrated bandspread dial for the 10, 20, 40 and 80 meter bands provides frequency meter tuning.

Oscillator compensation for frequency stability.

Automatic noise limiter.

Six-step variable selectivity covering wide range from high fidelity to extreme CW crystal.

S meter calibrated in "S" and "DB" units.

Push-pull output stage furnishes 8 watts of audio.

Front panel controls: RF Gain, Selectivity Switch, Crystal Phasing, Audio Gain, Pitch Control, Main Tuning Control, Bandspread Tuning Control, ANL Switch, Hi-Lo Tone, Send-Receive Switch and BFO Switch.

External provision for: Send-Receive Terminals, Headphones, 5000 or 500 ohm output, Single Wire or Doublet Antenna.

Laboratory checked, piezo quartz crystal filter included as standard equipment.

Ten-inch heavy duty PM dynamic speaker in matching metal cabinet included as standard equipment.

Dimensions of receiver cabinet only: 19½" long, 9½" high, 11⅛" deep.

110 volt 50-60 cycle AC operation. DC operation socket provided for battery or vibrapack.

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

HALLICRAFTERS COMMUNICATIONS EQUIPMENT

FEATURES *of the* SKYRIDER DEFIANT

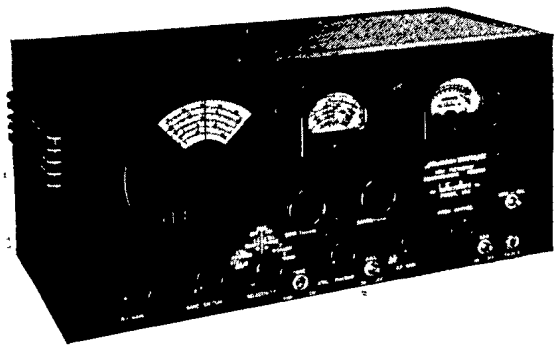

One stage of preselection. • Accurately calibrated bandspread dial throughout the amateur bands. • Frequency stability throughout a wide range of line-voltage, humidity and temperature variations. • DC operation socket—battery or vibrapack. • A brand new, highly efficient, noise limiter circuit. • Six point variable selectivity from sharp CW crystal to high-fidelity. • Terminals provided for break-in relay operation. Single-signal crystal filter standard equipment. • Meter calibrated in both S and DB units.

The SKYRIDER DEFIANT

WITH FREQUENCY METER TUNING

The Skyrider Defiant offers performance that can be favorably compared with most receivers at twice the price. Every advanced feature of the entire Hallicrafters line is incorporated in this unit. Truly, it has all of the desirable features and qualities that are needed for outstanding amateur reception. Four bands cover the range from 545 kc. to 43.5 m.c.; frequency meter tuning on 10, 20, 40 and 80 meter amateur bands. Tubes—3-6SK7, 1-6K8, 1-6SQ7, 1-6F6G, 1-6H6, 1-76, 1-80. Controls include RF gain, selectivity switch, crystal phasing, audio gain, pitch control, main tuning control, bandspread tuning control, A.N.L. switch, Hi-Lo tone, send-receive switch and BFO switch. Cabinet size—19½" long, 9½" high, 10⅛" deep. For operation from 110 volt 50-60 cycle AC. For 110 volt AC operation from 6 volt DC use No. 301 Electronic Converter.

The SKYRIDER DEFIANT (Model SX-24)—Complete with tubes and crystal. Shipping weight 40 lbs. .....(SKYFY) **$69.50**

The SKYRIDER DEFIANT (Model SX-24)—With tubes, crystal and 10" PM23 Dynamic Speaker. Shipping weight 56 lbs..... **$81.50**

Extra for Univ. 110-250 volts, 25-60 cycles... **$5.00**

S-29 SKY TRAVELLER



Take it with you—Use it at Home—the Model S-29 SKY TRAVELER is truly a universal receiver. Operates on either 110 volt AC or DC or from its self-contained batteries. Here is a portable designed to communications receiver tolerances. Mounted in an attractive black crackle finished aluminum cabinet with rounded corners, the Receiver covers from 542 kc. to 30.5 mc. (553 to 9.85 meters). Self-contained antenna with high gain coupling circuit provides truly remarkable reception throughout its tuning range. Band spreading is electrical—both RF and IF circuits permeability tuned—average sensitivity below two microvolts on all bands—one stage of preselection on all bands—improved automatic noise limiter for most satisfactory portable operation. The Model S-29 SKY TRAVELER .....NET **$59.50**

GENERAL SPECIFICATIONS

FREQUENCY RANGE:

Band 1— 542 to 1490 kc
Band 2— 1.43 to 4.35 mc.
Band 3— 4.12 to 11.9 mc.
Band 4—11.26 to 30.5 mc.

TUBE LINEUP:

1—1T4	RF Amplifier
1—1R5	Mixer
1—1P5-GT	1st IF Amplifier
1—1P5-GT	2nd IF Amplifier
1—1H5-GT	2nd Detector, AVC, 1st audio
1—3Q5-GT	Output Amplifier
1—1G4-GT	Beat Oscillator
1—1G4-GT	Noise Limiter
1—25Z5G	Rectifier

CONTROLS:

Main Tuning
Bandspread
R.F. Gain
A.F. Gain
Band Switch
Power Switch
AVC OFF-ON Switch
BFO OFF-ON Switch
ANL OFF-ON Switch
Send-Receive—Standby Switch

CONNECTORS:

Doublet Antenna Socket
Long Antenna Socket
Phone Jack
Battery Cable with Plugs
AC/DC Outlet Cord

FEATURES:

1—Operates on either 110/125 volts AC or DC and in addition from its self-contained batteries.
2—Electrical bandspread
3—1.4 volt tubes used throughout
4—Battery life prolonged through a self-contained charging circuit
5—Automatic Noise limiter
6—Self-contained collapsible antenna which can be extended to nearly 3 feet
7—An RF stage used on all bands
8—Sensitivity below two microvolts on all bands
9—High gain antenna coupling circuit for maximum antenna energy transfer
10—Approximate battery life 100 hours
11—Neon lamp to indicate tubes are lighted
12—Permeability tuned RF and IF circuits

PHYSICAL CONSTRUCTION:

Attractive black crackle finished aluminum cabinet substantially constructed to withstand hard usage. All corners of the cabinet are rounded for convenience in carrying. The one piece aluminum chassis is so designed for the greatest rigidity consistent with the least weight.

DIMENSIONS:

7" high—8½" wide—13¼" deep
Weight including all batteries:—18 lbs.

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

HALLICRAFTERS COMMUNICATIONS EQUIPMENT

"The SKYRIDER 23 Has Everything"

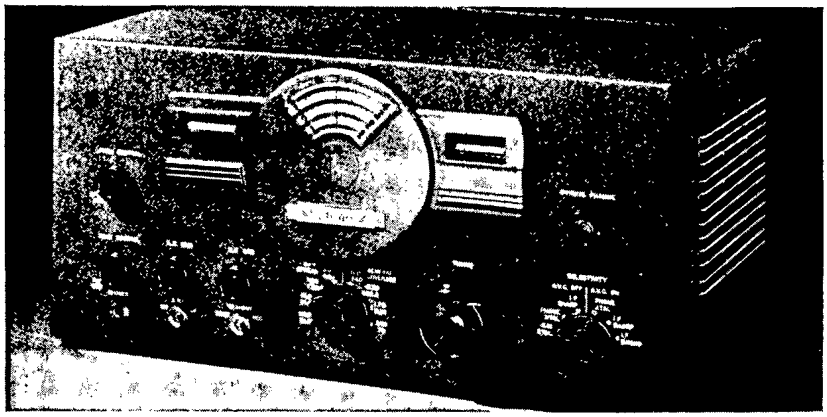

THE SX-23 is a truly fine example of outstanding engineering design, offering for the first time compensated frequency stability, eliminating drift. The main feature of the new bandspread system is its reset accuracy. There is no bandset dial to fuss with. The same station always comes in at the same place on the dial. The band indicator harmonizes with the S-DB meter, and is direct reading. Tubes—3-6SK7, 1-6SA7, 2-6SJ7, 1-6SQ7, 1-6B8, 1-6H6, 1-6F6G, 1-80. Controls, RF gain, pitch control, tone control, selectivity switch, A.N.L. switch, band switch, send-receive switch, audio gain, crystal phasing control, main tuning control and phone jack. Cabinet size—19" long, 9¼" high, 12½" deep. For operation from 110 volt 50-60 cycle AC. For 110 volt AC operation from 6 volts DC use No. 301 Electronic Converter.

FEATURES

8 bandswitch positions. Bands 1-2-3-4 cover 545 kc. to 44 mc. continuously. Bands 5-6-7-8 are pre-set bandspread for the amateur 10, 20, 40 and 80 meter bands. ● Six-step variable selectivity. ● Improved noise limiter circuit. ● Frequency stability, both from temperature-humidity effects and from line voltage variations. ● "Venetian Blind" dial, Band indicator and S-DB meter. ● Completely shielded crystal circuit and phasing control—permeability tuned coil—with separate shield compartment for crystal.

The SKYRIDER 23 (Model SX23)—Complete with tubes and crystal. Shipping weight 56 lbs. ..... (SKYNU) **$115.50**

The SKYRIDER 23 (Model SX23)—Complete with tubes, crystal, 10" PM 23 Speaker **$127.50**

Extra for Univ. 110-250 volts, 25-60 cycles..... **$5.00**

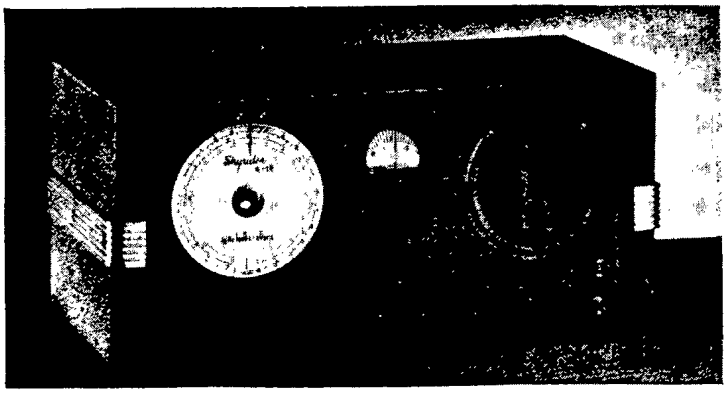

The SKYRIDER 5-10

Covers the radio spectrum from 27 mc. to 68 mc. in two bands with a degree of sensitivity and selectivity that is unparalleled. Band 1—27 mc. to 42 mc. Band 2—40 mc to 68 mc. Sensitivity of BETTER THAN 1 MICROVOLT. Socket on chassis for 6 volt mobile operation with the addition of a vibrapack or other suitable power supply. IF amplification—1600 kc. Tubes used—one each 1852, 6L7, 6J5, 6K7, 6P7G, 6F6G, 6H6 noise silencer and an 80. Built-in speaker.

Terminals are provided for an SM21 meter. For operation from 110 volts, 50-60 cycles, AC. Dimensions: 18½" x 9¼" x 8½" high.

The SKYRIDER 5-10 (Model S-21)—Complete with tubes and speaker. Shipping weight 34 lbs. ..... (SKYRI) **$69.50**

SM-21 carrier level meter..... **$10.00**

For 110 to 250 volt operation, 25 to 60 cy., additional cost **$5.00**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

WORLD'S LARGEST BUILDERS OF AMATEUR COMMUNICATIONS EQUIPMENT

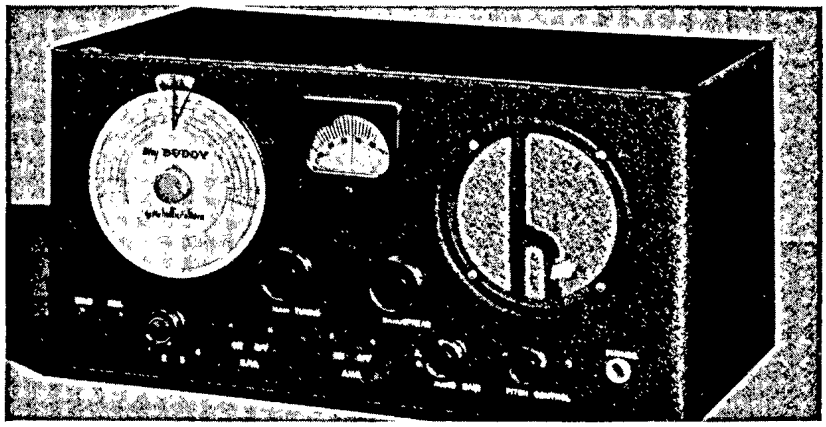

The SKY BUDDY

The new SKY BUDDY is an amateur receiver in every respect, covering everything on the air from 44 mc. to 545 kc., including the 10, 20, 40, 80 and 160 meter amateur bands. It now employs the same electrical bandspread system used in higher priced Hallicrafter models. The more important features are: Electrical bandspread, broadcast Band, BFO, AVC switch, phone jack, pitch control, built-in speaker. For operation on 110 volts 50-60 cycles AC. For operation on 110 volt AC from 6 volt DC use No. 301 Electronic Converter. Dimensions 17½" x 8½" x 8½" high.

FEATURES

Six tubes. Tunes 10 meter band. Electrical bandspread. Coverage and bandspread from 545 kc. to 44 mc. DC operation socket—battery or vibrapack.

The SKY BUDDY (Model S19R)—Including tubes and speaker. Shipping weight 21 lbs.....(SKYBU) $29.50

Extra for Univ. 110-250 volts, 25-60 cycles..... $5.00



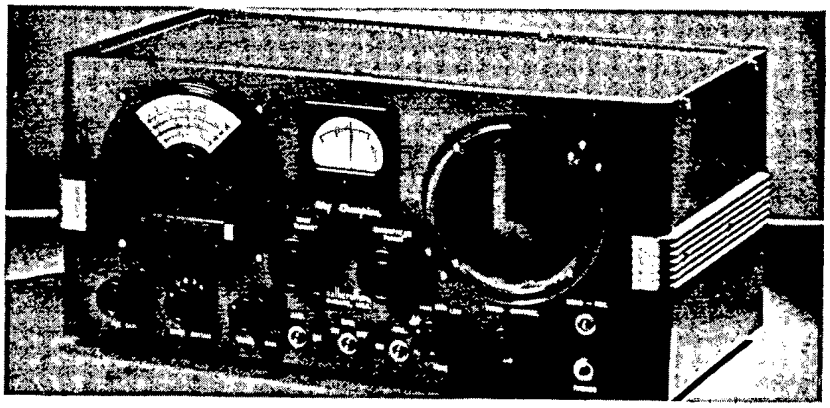

The SKY CHAMPION

A 9-tube Communications receiver with preselection and built-in speaker, offering a quality of performance never before available at this price.

Has all of the essential controls for good amateur reception as follows: RF gain, tone control, phone jack, AVC switch, BFO switch, send-receive switch, audio gain, pitch control and 4-position band switch. Easily adapted to 6 volt operation with a Model No. 301 Electronic Converter.

FEATURES: 9 tubes. Complete coverage (545 kc. to 44 mc.). Inertia tuning. Separate electrical bandspread. Beat frequency oscillator. Battery-vibrapack DC operation socket. Cabinet size—18½" long, 8½" high, 9¾" deep.

The SKY CHAMPION (Model S-20R)—Shipping weight 32 lbs.....(SKYCN) $49.50

Extra for Univ. 110-250 volts, 25-60 cycles.... $5.00

SM-20R carrier level meter..... $10.00

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

WORLD'S LARGEST BUILDERS OF AMATEUR COMMUNICATIONS EQUIPMENT

FREQUENCY MODULATION
AMPLITUDE MODULATION
145MC — 27MC (S-27)

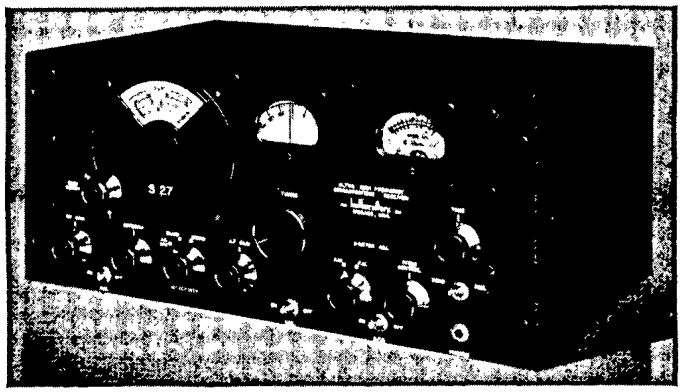

THIS Frequency Modulation communications receiver covers 3 bands: 27 to 46mc; 45 to 84mc; 81 to 145mc. Switch changing from FM to AM reception. Acorn tubes in R.F. and converter system. High gain 1852 tubes in Iron Core I.F. stages. Beam power tubes in A.F. amplifier. Controls are: R.F. gain control. Band switch. Antenna trimmer. I.F. selectivity control and power switch. Volume control. Pitch control. Tone control. S-meter adjustment. AVC on-off switch. Send-receive switch. Phone jack. Amplitude or Frequency Modulation switch. 15 tubes. 110 volt 50-60 cycle AC. Dimensions: 19" long, 9" high, 14" deep. Model S-27. Complete with tubes. Shipping weight 75 lbs. (FREMO) **$175.00**

The SKYRIDER DIVERSITY

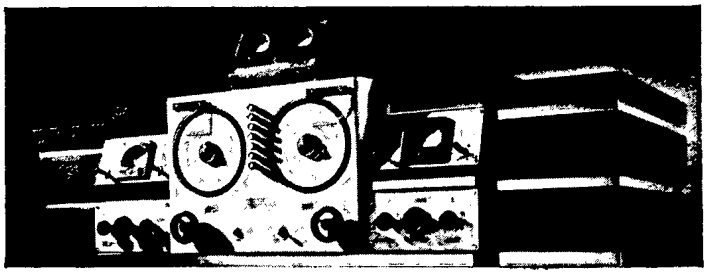

The advantage of diversity reception is in the practical elimination of fading effects, and a considerably higher average signal-to-noise ratio than can be obtained from any single receiver. Other advantages are:

1. The reduction of fading to negligible proportions.
2. An increase of average signal strength over any single receiver.
3. Improvement of signal-to-noise ratio over any single receiver.
4. Reduction of Heterodyne Beat Note Interference.
5. A quality of reception heretofore unavailable.

The SKYRIDER DIVERSITY offers diversity reception with a single r.f. heterodyne oscillator, and audio amplifier. 6 bands covering from 545 kc. to 44 mc. 26 tubes in the complete system. Average sensitivity of better than 1 microvolt. 2 stages of RF amplification in each receiving section. Audio amplifier output of 10 watts. (Tuner only 50 milliwatts.) Prices and terms upon application.

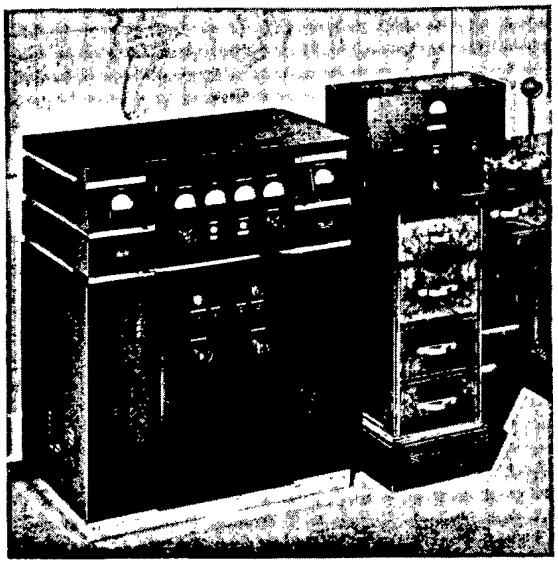

HT-4 450 WATT

The HT-4 is intended for those who want the BEST in an efficient, high-powered rig. The carrier output is 325 watts on phone and 450 watts on CW. The HT-5 preamplifier, supplied with the transmitter, may be mounted at the operating position, controlling volume, keying and standby. Thus, once adjusted to any band the rig may be operated remotely. The transmitter may be set to any three of the 10, 20, 40, 80 and 160 meter bands. Subsequent selection of any of the three frequencies is by a switch on the front panel. Tubes used are: 1-6F6 crystal oscillator, 1-6L6 doubler, parallel RK39's-buffer-driver, 1-RK63 final amplifier, PP-2A3 drivers, PP-RK38 modulaters, 2-5Z3, 2-866 rectifiers. The HT-5 preamplifier uses 1-6J7, 3-6J5, 1 80. For operation from 110 volts 50-60 cycles AC. Available for special frequencies. Write for prices.

MODEL HT-4—Complete with tubes, crystals, coils for any three amateur bands (10 and 160) and HT-5 preamplifier. Dimensions: 29" x 19" x 37" high.
Shipping weight 550 lbs. (TRACO) **$695.00**
Additional set of coils for any one amateur band (10 to 160) **$26.00**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

WORLD'S LARGEST BUILDERS OF AMATEUR COMMUNICATIONS EQUIPMENT

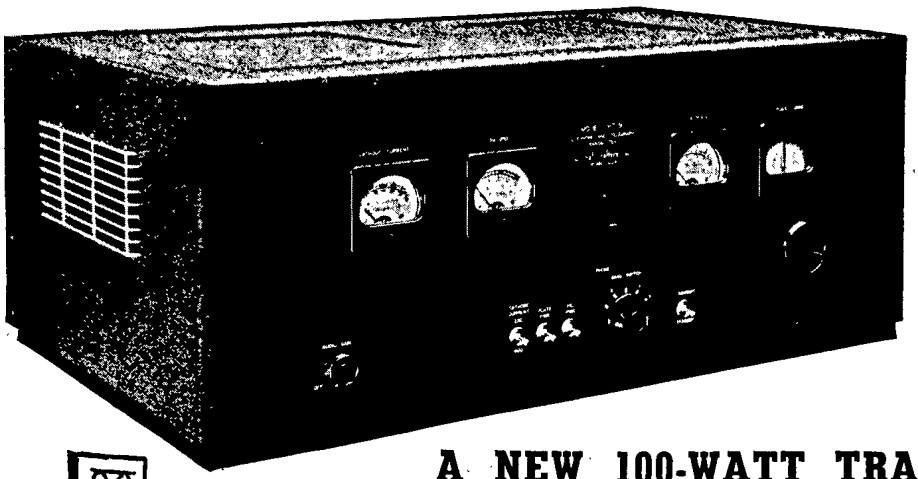

The HT-9

A NEW 100-WATT TRANSMITTER

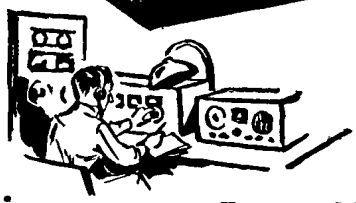

. . . at Less Than You Could Build It Yourself

IT IS probably true that only the largest builders of amateur communications equipment, with unlimited engineering and production facilities, could produce such a transmitter at so low a price. Were you to attempt to build it yourself, the cost for parts alone would be far in excess of this price.

The HT-9 is a 5-frequency phone and CW unit, rated at 100 watts on CW and 75 watts on phone (carrier *output*). Coils are available for all bands from 1.7 to 30 megacycles. Exciter coils for five bands can be plugged in, pretuned, and left in the transmitter. Bandswitch, controls and meters, governing every function of the transmitter, are all on the front panel. 100% modulation with very low distortion is assured. Carrier hum is at least 40 db below 100% modulation. Any medium-level high impedance type of microphone can be used.

14 Tubes — 1-6F6 Oscillator, 1-6L6 Doubler, 1-814 Power Amplifier, 1-6J7 Audio Input Amplifier, 1-6J5 Audio Amplifier, 4-6L6G PP Parallel Modulators, 2-866 High Voltage Rectifier, 1-5Z3 Exciter Rectifier, 1-5Z3 Audio Rectifier, 1-80 Audio Rectifier. For operation from 110 volts, 50-60 cycles AC. Dimensions: 28" wide, 18½" deep, 11½" high. Shipping weight 165 lbs.

FEATURES

Any 5 frequencies in range 1.7 to 30 megacycles.

Crystals and tuning units for all circuits up to the grid of the final amplifier are plugged and tuned in for each frequency channel desired.

Antenna coil will match any resistive load from 10 to 600 ohms.

Frequency response is flat within 3 db from 100 to 7000 cycles.

MODEL HT-9—Complete with tubes, but less crystals and coils	$199.50
160-80-40 meter coils (for operation on crystal frequency) each set	$6.65
20-10 meter coils (for operation on twice crystal frequency), each set	$8.95
160-80-40 meter crystals, each	$4.80
20 meter crystals (for 10 meter operation), each	$5.75

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

WORLD'S LARGEST BUILDERS OF AMATEUR COMMUNICATIONS EQUIPMENT



HT-6

25 WATT

Phone and CW Transmitter

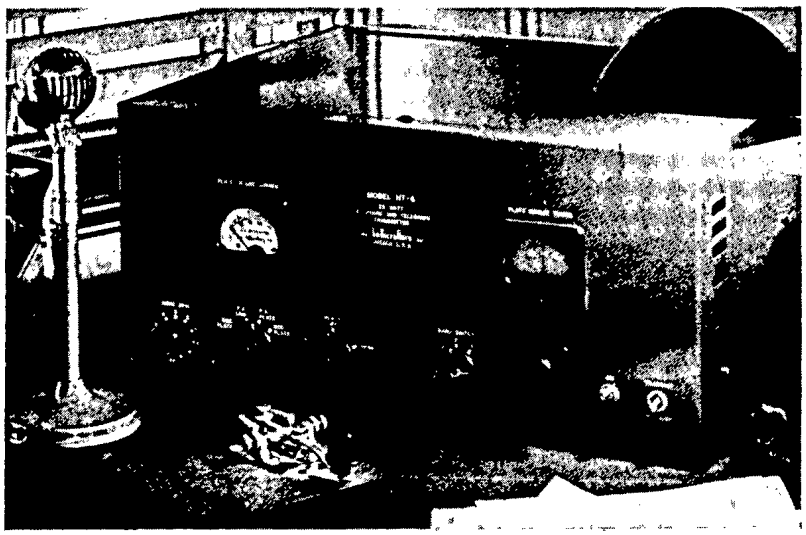

YOU have a real thrill when you operate the Hallicrafter HT-6 transmitter. Using an 807 in the final stage the power output is 25 watts on most bands. Frequency range is 1.7 mc. to 60 mc.

Coils for any three bands may be plugged in, pretuned, and then switched at will by a control on the front panel, which properly connects all circuits from crystal to antenna. It is only necessary to retune the final amplifier plate. Coils are available for any amateur band, 5 to 160 meters with crystal control; or with ECO on the 160, 80, 40, 20 meter amateur bands.

A special form of oscillator keying gives a clean chirpless signal, providing for break-in operation on CW.

Any high level high impedance mike may be used, such as an Astatic type D-104 or Shure 706-SA. Excellent voice quality with 100% modulation is assured. Output circuit is adjustable to match any resistive load of from 10 to 600 ohms.

Tube complement: 1-6L6 Osc.-dblr., 1-807 final R.F. amplifier, 1-6F5 microphone amplifier, 1-6J5 Audio amplifier, 2-6L6G modulators and 2-5Z3 rectifiers. Power drain about 120 watts CW and 225 watts phone. Size—20" long, 9" high, 15" deep. For operation on 110 volts 50-60 cycle AC.

MODEL HT-6—Transmitter with tubes, less coils and crystals. Ship. wt. 67 lbs.. (TRANO) **$99.00**

Coils for 160, 80, 40 or 20 meter operation, each set **$4.95**

E.C.O. unit for 160, 80, 40 or 20 meter operation for corresponding coils listed above, each **$3.65**

Set of coils for 5 or 10 meter operation on twice crystal frequency, each set..... **$6.95**

Random Frequency Crystal for 160, 80, 40 meters, each **$4.80**

Random Frequency Crystal for 20, 10 and 5 meters, each **$5.75**

Extra for 220 volt 50-60 cycle operation..... **$7.50**

FREQUENCY STANDARD

The HT-7 Frequency Standard consists of a stable crystal oscillator providing either 1000 kc. or 100 kc. output, together with a 10 kc. multivibrator and a harmonic amplifier. A switch on the front panel selects harmonics of 1000 kc., 100 kc. or 10 kc. With output fed into any good communications receiver accurate marker frequencies at 1000 kc., 100 kc. or 10 kc. appear across the dial. The frequency of the 100 kc. crystal is adjustable over a narrow range, so that it is possible to set its frequency to zero beat with either WWV or domestic broadcast stations, and once set will maintain its frequency accurately over long periods of time. Unequalled for checking transmitter frequency, and receiver calibrations. Also for calibrating and bandsetting receivers, locating signals for skeds, and setting ECO frequency. For operation on 110 volt 50-60 cycle. Shipping weight 10 lbs. Dimensions 5½" x 8" x 7½" high.

MODEL HT-7—Complete with tubes and crystal..(TRAFR) **$29.50**

Extra for Univ. 110-250 volts, 25-60 cycles..... **$5.00**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

WORLD'S LARGEST BUILDERS OF AMATEUR COMMUNICATIONS EQUIPMENT

S-30 RADIO COMPASS

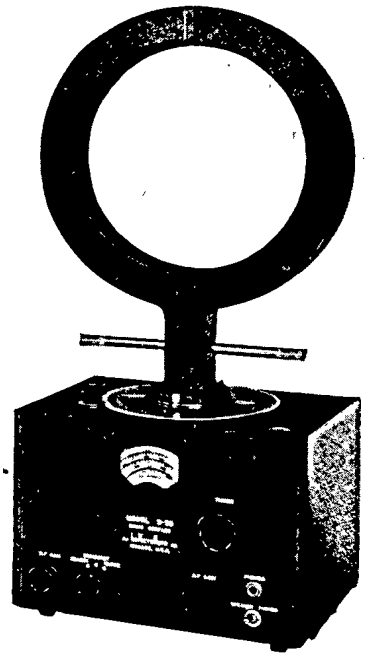

Know your location! The Model S-30 Radio compass and direction finder enables you to check your position against beacon, broadcast or shore radiophone stations. Coverage from 200 to 3000 kc. (1500 to 100 meters).

Sensitive headphones and tuning eye serve as indicators when taking a bearing. Normally used with a 6 volt battery —"A" and "B" battery box available when no 6 volt vibrapack power source available. Has provisions for external speaker should such an accessory be used. Substantially constructed, attractively finished aluminum cabinet houses the receiver and supports the rotatable loop antenna. Power supply is in separate cabinet.

Place a Model S-30 Radio Compass on board and have the assurance of knowing your position anytime.

GENERAL SPECIFICATIONS

FREQUENCY RANGE:

Beacon Band	— 220 to 540 KC
Broadcast Band	— 535 to 1340 KC
Marine Band	— 1200 to 3000 KC

TUBE LINEUP:

1—6SK7	RF Amplifier
1—6K8	Mixer
1—6SK7	I.F. Amplifier
1—6SQ7	2nd Detector—A.V.C.
1—6U5G	Tuning Indicator
1—6G6G	Output Amplifier

CONTROLS:

Main Tuning
R.F. Gain
A.F. Gain
Band Switch
Phone Jack
Speaker headphone switch
Compass card adjustment

POWER:

Standard power unit consists of thoroughly filtered vibrapack for 6 volt battery operation.

A battery box with "A" and "B" batteries is available for emergency use or where no 6 volt battery is available.

NULL INDICATION:

A sensitive pair of headphones is supplied with the radio. A tuning eye is built in as an auxiliary indicator.

SPEAKER:

A 5" Permanent Magnet Dynamic Speaker is available as an accessory.

PHYSICAL CONSTRUCTION:

The Model S-30 Radiocompass is built in a welded aluminum cabinet with a durable wrinkle finish. A 12" loop is mounted in an aluminum casting. No Magnetic materials are used wherever possible. All magnetic parts such as speaker and vibrapack are separate units for mounting at a distance from the compass itself.

DIMENSIONS:

11" wide—10⅜" deep
7½" high—overall height including loop—23½"

MODEL S-30 RADIO COMPASS:

Complete with tubes, headphones and 6 volt vibrapack power supply.
NET PRICE **$99.50**

Separate Emergency Battery Box complete—NET PRICE **$19.45**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

HALLICRAFTERS COMMUNICATIONS EQUIPMENT

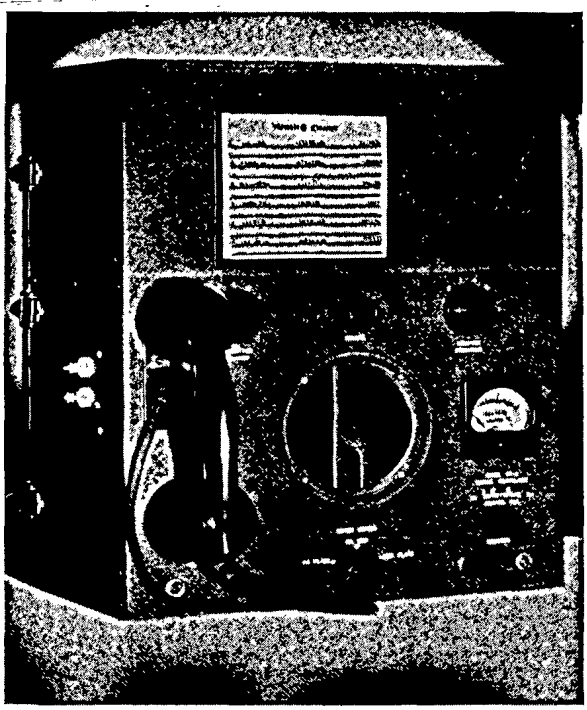

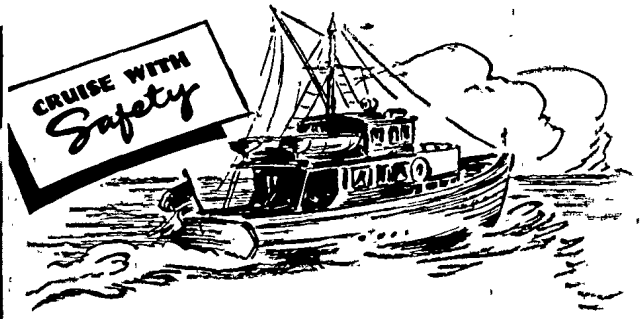

The HT-8
25 WATT
RADIOPHONE

THE HT-8 radiotelephone transmitter-receiver is the ideal unit for any type of craft, commercial or pleasure. It is designed to operate equally well on sailboat, power cruiser, large yacht, fishing boat, tug, barge or freighter.

The transmitter covers five frequencies and the receiver six frequencies (all crystal controlled). All are in the 2000-3000 range; or, if desired, two may be in the 3000-6000 range. When the telephone handset is lifted off the hook, the receiver output automatically transfers from the built-in loud speaker to the handset. To transmit, simply press the button on the handset and speak into the microphone.

FEATURES: 25 watts phone carrier. Five marine frequencies. Separate power supply. Quartz crystal controlled transmitter and receiver. Simple to operate. Precision built. 7-tube receiver. Effective squelch circuit. Handset or speaker output. No tuning required after installation. Modern design. Economical to operate. Low in purchase cost.

The very effective squelch circuit prevents static and noise from appearing in the loud speaker output when no carrier is present. Hence, the receiver may be left tuned to any station frequency without annoying bursts of static drumming on the ears.

MODEL HT-8—Bulkhead type. Dimensions 15" x 10" x 18" high. Shipping weight 105 lbs. Complete with tubes, separate power supply for 12, 32, or 110 volts DC as specified (all operate on 110 volt 60 cycle AC). Less crystals and installation .....(TRABU) **$290.00**

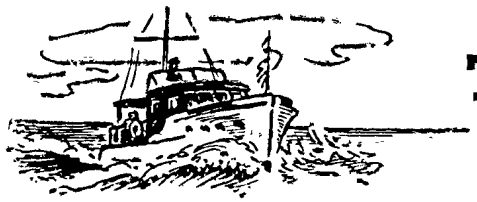

The SKYRIDER MARINE

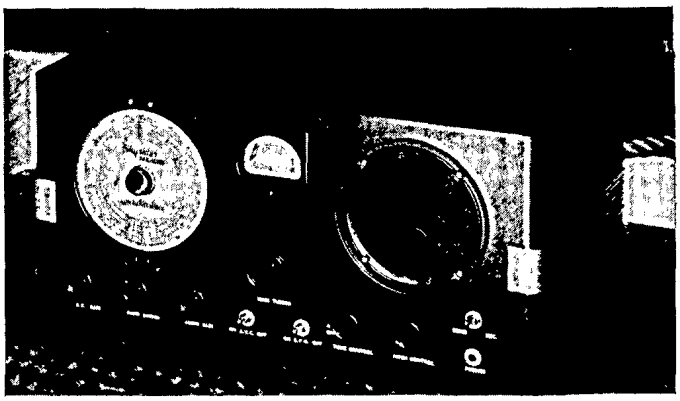

Specifically designed for marine service, in the range from 16.2 to 2150 meters (18.5 mc. to 140 kc.). Improved image rejection at the higher frequencies is achieved through the use of 1600 kc. IF transformers. The directly calibrated main tuning dial eliminates the use of complicated charts and tables. An efficient mechanical bandspread with separate dial provides easy logging. Built for 110 volt AC-DC operation. Also may be operated from 6 volt battery supply with the addition of a Model No. 301 Electronic Converter. Dimensions 18½" x 9¼" x 8½" high. The SKYRIDER MARINE (Model S-22)—Complete with tubes and speaker. Shipping weight 31 lbs.....(SKYCU) **$64.50**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

WORLD'S LARGEST BUILDERS OF AMATEUR COMMUNICATIONS EQUIPMENT

The Model HT-11 Marine Radiophone is a complete moderately priced ship to shore radio transmitter and receiver. The transmitter can be operated on three frequencies in the marine band of 2000 to 3000 kc. The receiver is manually tuned and covers the standard broadcast band on range #1. Range #2 covers the marine channels. The separate noiseless vibrapack power supply is supplied for 6 or 12 volt DC operation. Other voltages can be used with suitable converter.

Ruggedly constructed—attractively finished—compact in shape—small in size—light in weight—the HT-11 —12 watt Radiophone is the ideal unit for the smaller pleasure craft, wanting to cruise in safety.

PRICES START AT NET **$149.50**

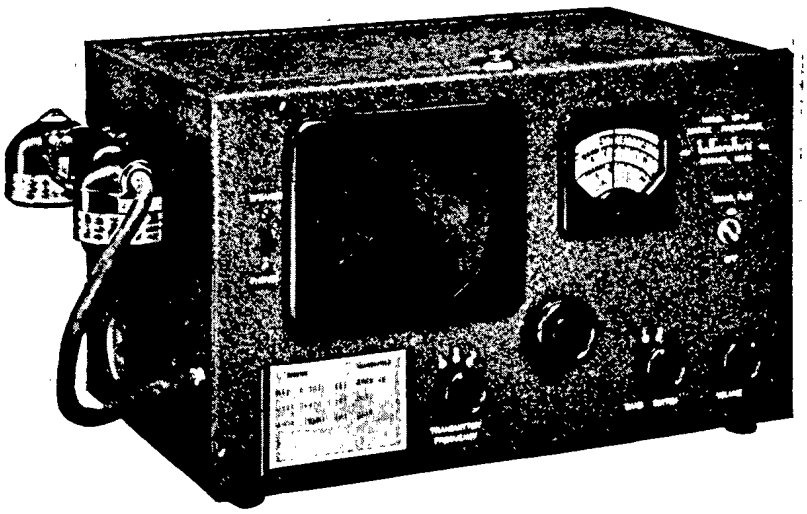

HT-11 MARINE RADIOPHONE UNIT

12 WATT

GENERAL SPECIFICATIONS

FREQUENCY RANGE:

Transmitter—3 crystal controlled Frequencies in the range of 2000 to 3000 kc.

Receiver:	Manually tuned with directly calibrated dial
Band 1	550 to 1700 kc.
Band 2	2000 to 3000 kc.

TUBE LINEUP:

Transmitter	1—6V6 Oscillator
	1—807 Power Amplifier
	2—6V6G Modulators
Receiver:	1—6SK7 R.F. Amplifier
	1—6K8 Mixer
	1—6SK7 I.F. Amplifier
	1—6SQ7 2nd Detector—AVC —1st audio
	1—6K6G Audio Amplifier
	2—6X5G Rectifiers

CONTROLS:

Transmitter channel switch
Receiver Band Switch
Receiver Volume control and ON-OFF switch
Receiver tuning
Transmitter Fil. OFF-ON switch
Speaker-headphone switch
Handset with Send-Receive push button

POWER SUPPLY:

The HT-11 power supply is a separate unit connected to the transmitter-receiver with a cable. The standard power pack is for 6 or 12 volt DC operation as specified. The same power supply is used for both voltages and easily converted from one to the other. Also available is a 110 volt-60 cycle AC power supply which may be used with a rotary converter for 32 or 110 volt DC operation.

PHYSICAL CONSTRUCTION:

The small sturdy metal cabinet can be easily mounted on a table or shelf. Rust proofing and corrosion protective used throughout.

DIMENSIONS:

14⅛" wide—8⅝" high—9¼" deep.

MODEL HT-11 RADIOPHONE

Complete with tubes and power supply for 6 or 12 volt DC operation as specified—less crystals and installation.....NET **$159.50**

HT-11 same as above but for 110 volt AC— **$149.50**

32 or 110 volt DC converter for use with above model HT-11 ..... **$46.00**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

HALLICRAFTERS COMMUNICATIONS EQUIPMENT

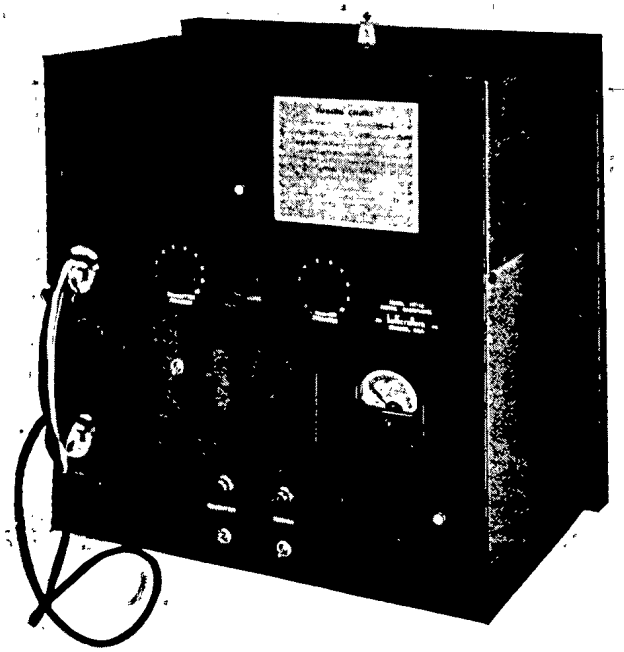

The Model HT-12—50 watt Radiophone answers every marine radio need!

Ten crystal controlled transmitting and receiving channels provide communications with shore stations wherever you cruise.

Power supplies available for operation on 12-32-110 DC and 110 volt-60 cycles AC.

No switches to throw to place the transmitter on the air—all operation by voice controlled relays!

Attractively finished in machine tool gray wrinkle lacquer, the durable rust proofed cabinet is suitable for either table or bulkhead mounting—the HT-12 will provide the maximum in safety and convenience.

PRICES START AT.....NET **$390 00**

HT-12 MARINE RADIOPHONE UNIT

50 WATT

GENERAL SPECIFICATIONS

FREQUENCY RANGE:

10 crystal controlled transmitting and receiving channels in range of 2000-3000 kc. When specified, two of these channels can be used for operation in the range of 3000 to 6700 kc.

TUBE LINEUP:

1—6L6	Oscillator
2—807	Power Amplifier
1—6J5	Input audio amplifier
4—6L6G	Modulators

RECEIVER:

1—6SK7	R. F. Amplifier
1—6SA7	Mixer
1—6SJ7	H. F. Oscillator
1—6SK7	I. F. Amplifier
1—6SQ7	2nd Detector—Q.A.V.C.
1—6SF5	Audio Amplifier
1—6K6G	Output Amplifier
1—6X5G	Rectifier
2—5Z3	Rectifiers

CONTROLS:

Only controls which are used by the Operator are accessible on the front panel.
Receiver—ON-OFF Switch
Transmitter filaments Switch
Receiver channel Switch
Transmitter channel Switch
Receiver volume control
Speaker ON-OFF Switch
Hand set on Hanger (transmitter is voice-controlled—no push button is needed)

POWER SUPPLY:

The power supply is a separate unit. A 110 volt-60 cycle AC power supply is standard and is furnished with a rotary converter for 32 or 110 volt DC operation. Where 12 volt DC is used, the power supply consists of a heavy duty vibrapack for the receiver and a dynamotor for the transmitter both mounted in a single unit.

PHYSICAL CONSTRUCTION:

Heavy metal cabinet suitable for table or bulkhead mounting. Corrosion protected treatment throughout. Exterior of unit finished in attractive, durable machine-tool gray wrinkle, after complete rust proofing treatment.

TUNING ADJUSTMENT:

Readily accessible controls for resonating transmitter are covered by easily removed protective face plates. Tuning adjustments are made only at time of installation.

DIMENSIONS OF RADIOPHONE:

20½" high—19¼" wide—12" deep.
Complete with tubes, less crystals and installation but with power supply for 110 volt 50/60 cycles. .....NET **$390 00**

MODEL HT-12

Same as above but for 32 or 110 volts DC Operation—as specified **$470 00**

MODEL HT-12

Same as above but for operation from 12 volts DC **$525 00**

Available in U.S.A. on Hallicrafters Factory-Sponsored Time Payment Plan

THE HALLICRAFTERS, INC., CHICAGO, ILLINOIS, U.S.A.

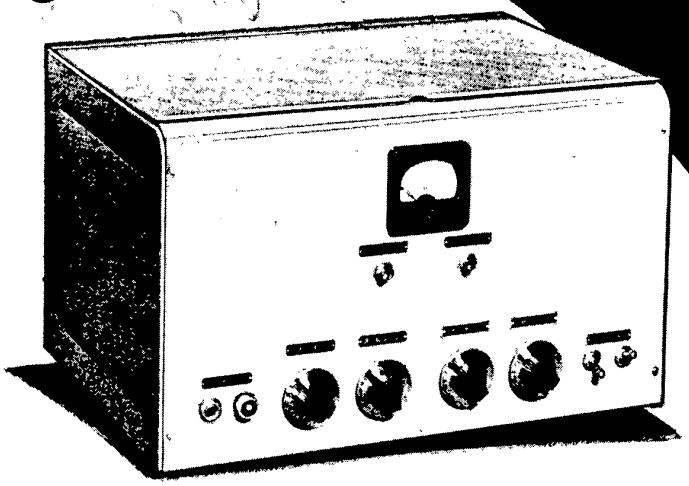

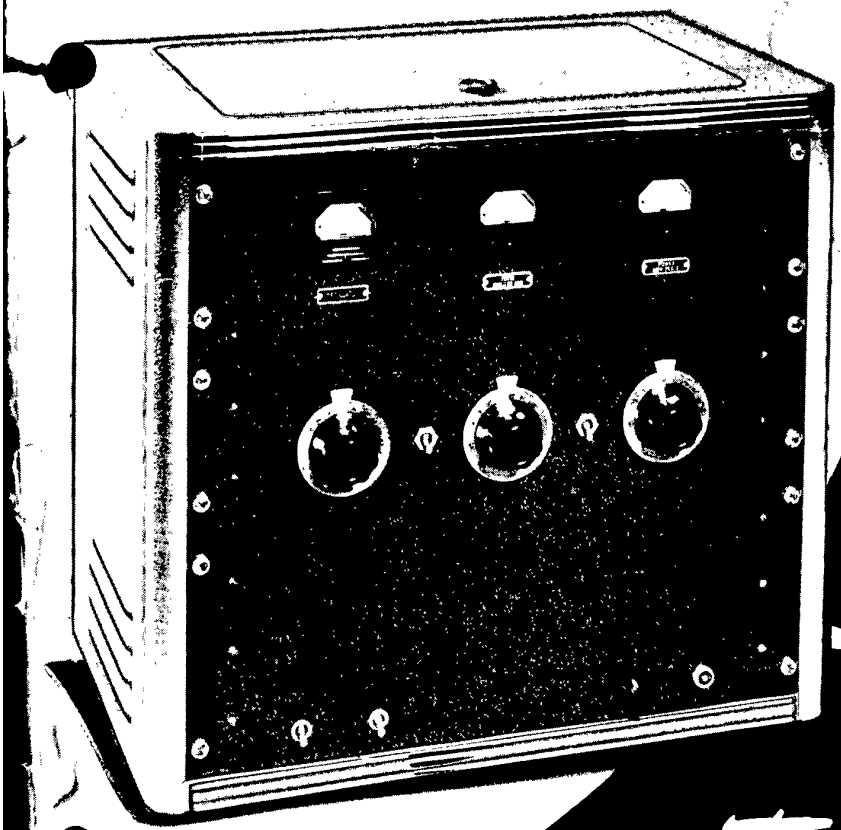

15¢

THORDARSON

Transmitter Guide

No. 344-E

Since 1895—

Since 1895 the Thordarson organization has pioneered in the development and manufacture of quality transformers in the progressive electrical world. The policy of the company — to engineer the best product for the application — is consistently maintained. Small wonder that Thordarson is the recipient of both national and international awards for outstanding contributions to better engineering.

From the earliest spark coil days Thordarson has devoted an important part of its engineering and laboratory resources to the development of Amateur Radio. Today, the Amateur Radio fraternity is the training ground for broadcast, communications and government engineers.

To further promote the interest and pleasure of this worthy hobby, Thordarson presents this latest Transmitter Guide. This guide offers you a wide choice of units from the smallest transmitter for the beginner to the larger and more elaborate rigs for the advanced amateur. These transmitters are conservatively rated and employ the latest technical developments for efficient and economical operation. The cabinets and panels are beautifully designed and the circuits are adaptable to a multitude of amateur applications. Simplified construction methods are employed throughout the guide and the use of Thordarson transformers and chokes will insure perfect performance for many years.

Our sincere wish is that this guide will enable you to find many hours of enjoyment in contacting old friends and making new ones on the amateur bands.

Contents

20 Watt CW Transmitter 3

35 Watt Phone-CW Transmitter 4, 5

50 Watt 5 & 10 Meter Phone Transmitter 6, 7

55 Watt Phone, 80 Watt CW Transmitter..8, 9, 10, 11

12 Watt Mobile Transmitter, 5 & 10 Meters 12, 13

12 Watt Universal Transmitter for Portable and Emergency Service 14, 15

40 Watt Band-Switch Exciter Unit 16, 17

120 Watt Band-Switch Exciter Unit 18, 19

100 Watt Band-Switch Transmitter 20, 21

Amateur Speech Amplifier 22

250 Watt Phone, 450 Watt CW Transmitter.23, 24, 25

400 Watt Transmitter.....26, 27, 28

600 Watt Transmitter 29, 30, 31, 32

1000 Watt Transmitter 33, 34, 35, 36

Transmitter Pre-Amplifier 37

Thordarson Technical Literature 37

Class B Output Calculations 38, 39

Driver Transformer Ratios 40

Matching Class C Loads.....41

Multi-Match Modulation Transformer Ratios..41, 42

Matched Power Supplies 43

COPYRIGHT 1940, THORDARSON ELECTRIC MFG. CO.

Printed in U. S. A.

Kits for THORDARSON TRANSMITTERS

Original Circuits! Modern Designs! EASY To Construct!

These transmitters, engineered in the Thordarson laboratories, incorporate modern features, simplified construction and efficient operation. Streamlined cabinets and panels, finished in the new smooth grey enamel, are extremely smart in appearance. Each kit contains all necessary parts except accessories for construction of a fine transmitter, including punched and drilled chassis and panel, condensers, resistors, and hardware that may be difficult to obtain. Coils are not included in the basic kits because of the varying individual band preferences. Large size circuit diagrams and instruction book containing all pertinent data are included with each kit.

Treat yourself to the satisfaction of "Thordarson" quality. New beauty — flawless performance can now be yours at moderate prices. *Now* you can afford that extra rig for standby or portable service. See your Thordarson distributor NOW!

20 Watt CW Beginner's Transmitter

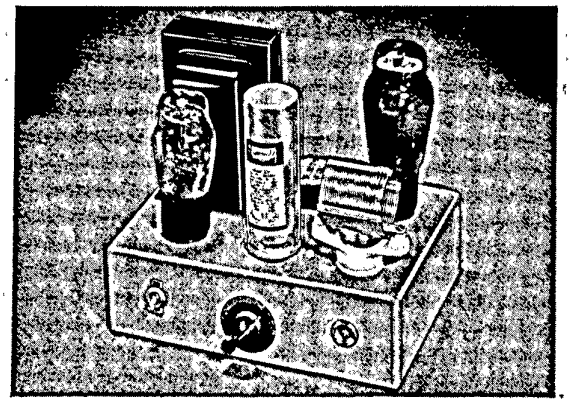

Designed primarily for the beginner, the crystal-controlled 20 watt code transmitter operates on all bands from 160 to 10 meters. If higher power is desired at some later date, this unit may also be used as the crystal oscillator of a larger multi-stage transmitter. A low impedance link is provided to couple the transmitter to a doublet antenna or to an antenna matching network. A pilot lamp in the negative high voltage lead is used as an inexpensive yet effective tuning indicator. Simplicity of construction and ease of operation make this an ideal unit for the new amateur, enabling him to get on the air with small initial investment.

T-22K03 20 Watt CW Unit, Kit of Parts.....$22.50 List
Includes all parts except coils, phone plug, crystal and tubes.

35 Watt Phone-CW Transmitter

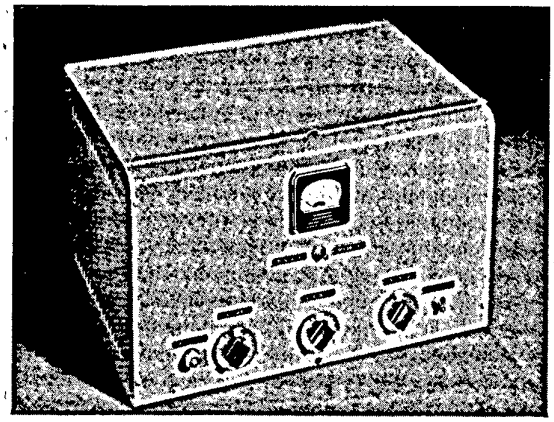

Mounted in a modern, attractive cabinet, this compact transmitter is capable of 35 watts input on either CW or phone. The power supply and audio section are mounted on the same chassis with the r.f. section. The plug-in coil feature adds to the desirability of this transmitter for the amateur who wants low power on the five amateur bands. All controls are on the front panel for ease of operation. R.F. tubes used include 6V6-G harmonic oscillator and 6L6-G final amplifier. The carbon microphone which is required derives its exciting current from the power supply bleeder and is used to drive a 6A6 speech amplifier, which in turn excites a Class B modulator. A variable link is used to couple the transmitter to the antenna.

T-22K37 35 Watt Phone-CW, Kit of Parts.....$72.50 List
Includes all parts except coils, meter, crystal and tubes.

12 Watt Universal Transmitter

For Portable and Emergency Service

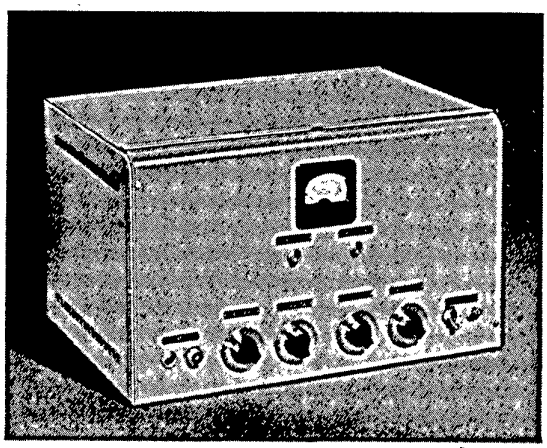

This 115 volt A.C. or 6 volt D.C. transmitter is one of the most popular of the entire group because of its extreme flexibility. Merely inserting the proper power plug changes the circuit from A.C. to D.C.. Maximum power input is 12 watts on battery operation and slightly more when operated on an A.C. line. This transmitter can be operated on all amateur bands from 160 to 10 meters, and doubling may be accomplished in the crystal stage when using 160, 80 and 40 meter crystals. A 6V6-G oscillator tube is used in a regenerative type circuit having an r.f. choke in the cathode circuit. Final stage uses an 807 tube. The modulator tube is a 6V6-G operating Class A and the audio amplifier section consists of two 6J7 tubes, pentode connected, providing ample gain for operation with a crystal microphone.

T-22K13 Portable Emergency Transmitter, Kit of Parts.....$71.50 List
Includes all parts except vibrator, meter, coils, crystal and tubes.

(See opposite side for more Thordarson Transmitter Kits)

THORDARSON TRANSMITTER KITS

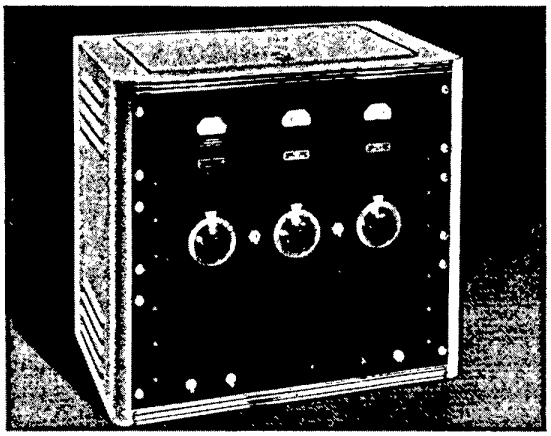

55 Watt Phone, 80 Watt CW Transmitter

This Thordarson transmitter, expertly engineered and designed for either 55 watt phone or 80 watt CW operation on 160 to 10 meters, is built with independent audio and r.f. sections. Each section has its own power supply and may be used separately. The r.f. plate supply uses a 5Z3 and two 866JR tubes. The power supply on the modulator chassis uses a 5Z3. A gain of 122 db permits operation of the transmitter with any of the popular types of high impedance microphones. The 6L6-G modulator tubes, operating Class AB_1, fully modulate the 55 watt Class C input. Speech amplifier tubes: 6J7, 6J7, 6C5, 2 – 6L6-G's. R.F. tubes; 6F6-G oscillator, 6L6-G buffer or doubler, and 809 final amplifier stage. Individual kits for r.f. and modulator sections.

T-22K71 R.F. Section, Kit of Parts.....$93.00 List
Includes all parts except coil forms, cabinet, meters, plug-in condenser, jack base, crystal and tubes.

T-22K73 Modulator Section, Kit of Parts.....$58.50 List
Includes all parts except tubes and cabinet.

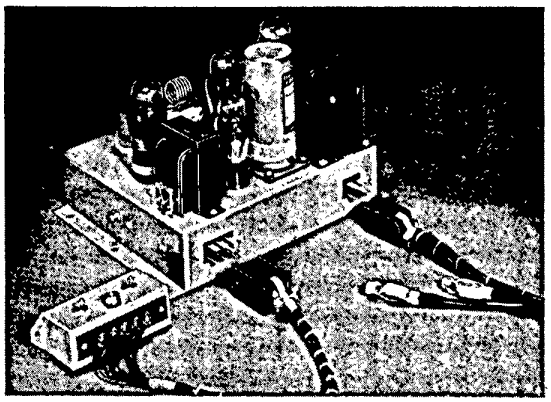

12 Watt Mobile Transmitter

Many extra hours of operating enjoyment on the 5 and 10 meter bands can be had with this new Portable Mobile transmitter. It is carefully designed to withstand the vibration to which a mobile unit is often subjected. It operates from a 6 volt storage battery and uses a vibrator power supply that can be remotely controlled quite a distance from the transmitter. All modern improvements are included for simplified operation under all conditions. R.F. tubes used include: 6V6-G tri-tet crystal oscillator and T-21 final amplifier. A single 6V6-G operates as a Class A amplifier to modulate the T-21 tube. Provision is made for remotely connecting a carbon microphone to the primary of the microphone transformer mounted on the under side of the chassis.

T-22K11 12 Watt Mobile Unit, Kit of Parts.....$62.00 List
Includes all parts except vibrator, crystal and tubes.

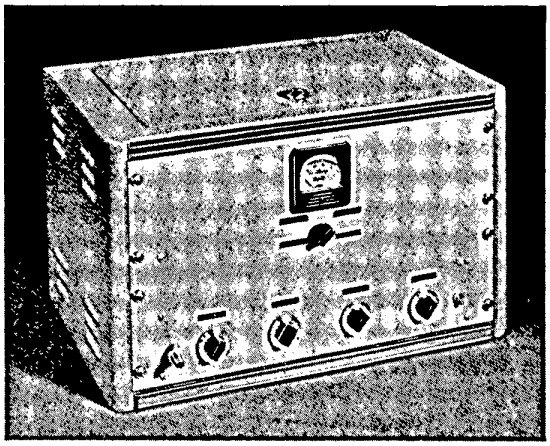

50 Watt 5 & 10 Meter Phone Transmitter

Unusually compact, this 5 and 10 meter phone transmitter contains in a single unit a 50 watt r.f. and 25 watt modulator section, together with their respective power supplies. R.F. tubes used include 6L6-G tri-tet oscillator, HK-24 doubler, and HK-24 final amplifier. The speech amplifier is designed to permit the use of either a high impedance dynamic or crystal microphone. The modulator consists of a pair of 6L6-G tubes operating in Class AB_1. Panel fits a standard 19" relay rack. When used with the modern streamlined grey cabinet, it presents a most attractive and efficient-looking job. A single meter in conjunction with a meter switch measures the oscillator plate, buffer plate, final grid, and final plate currents.

T-22K51 50 Watt 5 & 10 Meter Unit, Kit of Parts $126.00 List
Includes all parts except cabinet, meter, crystal and tubes.

New Transmitter Guide, No. 344E—15¢ Postpaid

This new 44 page transmitter guide, featuring up-to-date circuits, modern streamlined cabinets and simplified construction methods is now available from your local Thordarson distributor. This Thordarson guide describes and illustrates a wide range of transmitters from a beginner's type up to a kilowatt rig in a clear and concise manner. Consult this guide as a basic source of new ideas for building any type of Amateur Radio equipment.

THORDARSON ELECTRIC MANUFACTURING COMPANY
500 WEST HURON STREET **CHICAGO, ILLINOIS**

Copyright 1940—Thordarson Electric Mfg. Co.

SD464 112540

20 Watt CW Transmitter

FOR the newcomer in amateur radio desiring a simple yet reliable transmitter, this transmitter with metal chassis has been designed. Its crystal controlled circuit is of such a type that operation is possible on five amateur bands. If higher power is desired at some later date this transmitter may also be used as the crystal oscillator stage of a larger multi-stage transmitter.

Circuit Operation

Operation on the five amateur bands from 160 to 10 meters is possible. On all of these five bands the oscillator will work "straight through"; that is, the crystal frequency and the output frequency are the same. In addition, the oscillator will give good outputs when doubling, using 160, 80 and 40 meter crystals.

The plug-in coils on this transmitter are of a type having a built-in link on the "cold" end of the coil. If used as the exciter for a larger transmitter this unit may be link-coupled or capacity-coupled to the succeeding stage.

Successful operation of this type oscillator on the five amateur bands is made possible by including condenser C-8 in the 40 meter coil base. Since the capacity, C-3, which gives adequate performance with 10 and 20 meter crystals results in excessive crystal current with a 40 meter crystal, the 0.00025 Mfd. condenser, C-8, is mounted on the 40 meter coil base in such a manner that it is paralleled with the cathode-to-ground circuit of the 6L6G when the 40 meter coil is used. This minimizes the likelihood of high crystal current in the 40 meter crystal, yet it permits the 20 and 10 meter crystals to oscillate with highest efficiency.

A pilot lamp in the negative high voltage lead makes an inexpensive yet effective tuning indicator. For best results in tuning it is recommended that the operator start to tune from minimum capacity toward maximum capacity, until the lamp passes through its first minimum in brilliancy. The condenser should then be tuned back a slight amount toward minimum capacity to maintain good oscillator stability and ease of starting when keying. A flashlight bulb connected to a two or three turn wire loop placed over the tank coil is a handy indicator of circuit conditions when tuning.

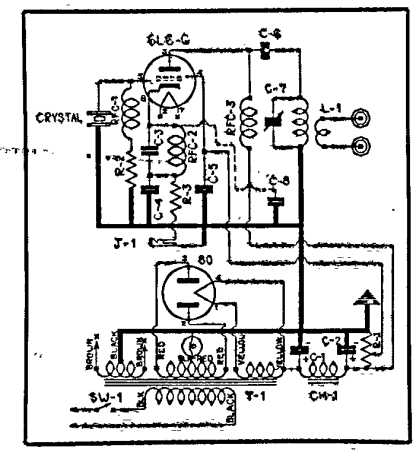

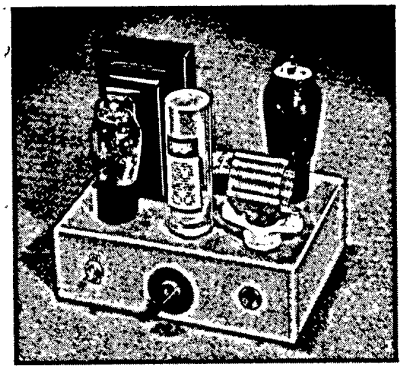

Chassis View

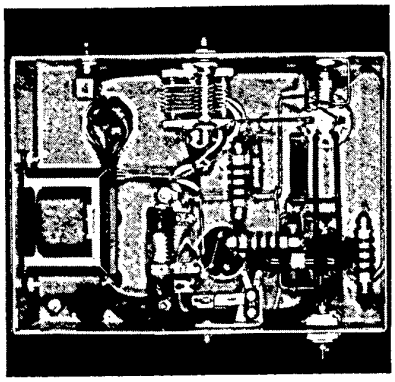

Bottom View

The parts layout shown in the above photograph should be closely followed for best results. The position of the power supply leads is not critical, but all connections in the RF circuit should be made as shown.

The keying jack is mounted on the rear apron of the chassis. It is of the circuit closing type so that the removal of the keying plug closes the circuit.

When properly loaded the input to the 6L6-G plate is about 20 watts. At slightly greater antenna loading, the change in "B" current when tuning through resonance is barely noticeable.

The screen voltage may be adjusted by moving the tap on the bleeder resistor R-1. The recommended setting for this tap is approximately one-fifth of the distance from the B+ end. The position of this tap has been selected as being optimum for reasonable output on all five bands without exceeding the rated crystal current of any crystal, or the rated dissipation of the tube in any condition of loading. With the 160 or 80 meter crystals the moving of this tap closer to the B+ end of the bleeder will result in greater output without damage to the crystal or without exceeding the rated dissipation of the tube.

Parts Required

THORDARSON TRANSFORMER and CHOKE

T-1	T-70R61	Power Transformer
CH-1	T-44C02	Filter Choke

Resistors:

R-1	20,000 Ohm 25 Watt Wirewound Resistor, Semi-Variable
R-2	20,000 Ohm 1 Watt Resistor
R-3	300 Ohm 10 Watt Resistor

Condensers:

C-1, C-2	Double 8 Mfd. 450 Volt Condenser
C-3	.0001 Mfd. Mica Condenser
C-4	.01 Mfd. 400 Volt Condenser
C-5	.01 Mfd. 400 Volt Condenser
C-6	.002 Mfd. 1,000 Volt Mica Condenser
C-7	100 Mmfd. Variable Condenser
C-8	.00025 Mfd. Mica Condenser

RF Chokes:

RFC-1	RF Choke
RFC-2	RF Choke
RFC-3	RF Choke

Miscellaneous Parts:

1	Chassis 8½" x 6" x 2½" (Punched and Drilled)
2	Feed-thru Insulators
1	Name Plate
1	Dial Plate
1	Octal Socket
1	4-Contact Socket
1	5-Contact Socket
1	5-Contact Socket, Steatite
1	Pilot Lamp Socket
1	Line Cord and Plug
1	SPST Switch
1	Knob

Misc. Parts: (Cont'd)

1	Closed Circuit Jack
1	6.3 Volt Pilot Light

Miscellaneous nuts, bolts, soldering and mounting lugs, lock-washers and other hardware.

Accessories:

1	160 Meter RF Coil, End Linked, Bud OEL-160 or Equivalent
1	80 Meter RF Coil, End Linked, Bud OEL-80 or Equivalent
1	40 Meter RF Coil, End Linked, Bud OEL-40 or Equivalent
1	20 Meter RF Coil, End Linked, Bud OEL-20 or Equivalent
1	10 Meter RF Coil, End Linked, Bud OEL-10 or Equivalent
1	Phone Plug Yaxley No. 75 or Equivalent
1	Crystal
1	80 Tube
1	6L6-G or 6L6 GX Tube

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

35 Watt Phone-CW Transmitter

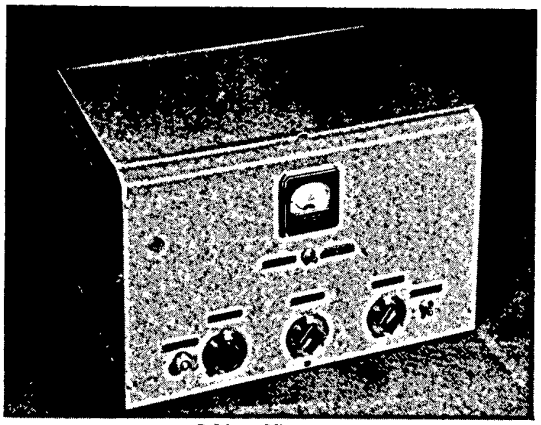

Cabinet View

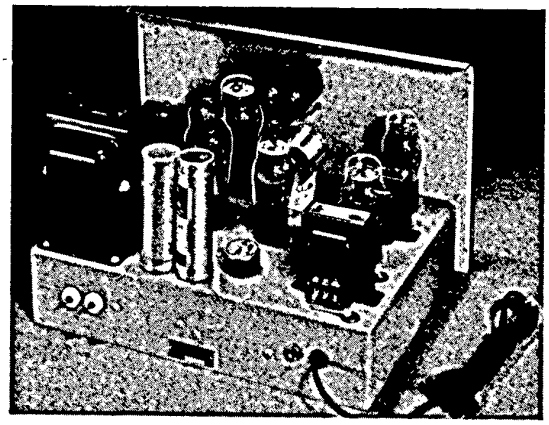

Chassis View

THIS compact transmitter is capable of 35 watts input on CW and phone. Its power supply and its Class B audio amplifier are included on the same chassis as the RF section, and its flexibility makes it a desirable transmitter for those wishing low power on the five amateur bands from 160 to 10 meters. The complete transmitter is built upon a rectangular chassis and is housed in an attractive cabinet with a curved panel of modern design. The cabinet, panel and chassis are finished in gray flat enamel. All controls are mounted on the front panel.

The 6V6-G crystal oscillator circuit easily provides enough driving power for the 6L6-G final amplifier. The oscillator and amplifier plate voltage is 315 V. and the oscillator screen voltage is 210V. Harmonic operation of the crystal oscillator may be obtained when using 160, 80 and 40 meter crystals.

There is a condition of optimum excitation for the beam power final amplifier. In some cases it may be desirable to reduce the output of the oscillator stage so that the final stage will not be overdriven. To do this the oscillator tank is detuned by turning the tank condenser toward its minimum capacity setting.

The final amplifier may be worked "straight through," or it may be used for doubling. It delivers good power outputs when doubling to 80, 40, 20 and 10 meters. The final amplifier stage uses plate neutralization so that even on the highest frequencies no difficulty is experienced with self-oscillation. Cathode bias is used on the final amplifier; this aids in limiting the plate current when the final tank is not tuned to resonance or when there is no excitation on the final grid.

The plate tank coils for both stages are of the plug-in type. Although the crystal oscillator stage is capacity coupled to the final amplifier stage, the plug-in coil used is a Bud type OEL having a link on one end so that the coil may be used in other applications. The final tank coil is of the center-taped, center-linked type with a semi-fixed link. For the amateur who changes bands often, this provides the advantage of being able to change coils without changing the loading adjustment for each band.

Both the oscillator and final stage are keyed. The keying jack is of the closed circuit type so that no change in connections is necessary for changing quickly from CW to phone operation.

When properly loaded, the plate current in the final amplifier stage is

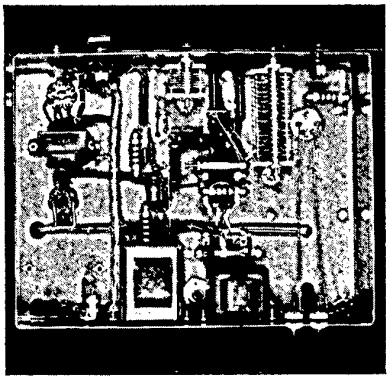

Bottom View

110 MA; and the current in the crystal oscillator plate is 25 to 30 MA. The modulator is a Class B 6A6 operating with 255 volts on the plate. Despite the high plate voltage, operation is very satisfactory in intermittent service.

The 6A6 operates at zero bias, and it is driven by another 6A6 triode with its two sections in parallel. The plates of the driver are also operated at 325 volts. The cathode bias on the driver is of the order of 5 to 6 volts. High gain is realized in this stage so that no additional amplification is needed to obtain 100% modulation when using a carbon microphone.

The current for the carbon microphone is obtained by passing the bleeder current through the microphone circuit. Adequate filtering is provided so that no hum enters the audio circuit at this point. In order that the removal of the microphone plug from the chassis will not place a high voltage across C-4, the microphone connector is of the shorting type which closes the microphone circuit even when the microphone has been removed. With such a feature the operator can never inadvertently place high voltage on the condenser, C-4.

The power supply uses a 5Z3 rectifier tube. Separate switches are provided for the plate and filament supplies. A filament switch is mounted on the volume control. A handy toggle-switch on the panel controls the plate supply. A single meter is provided with switching which permits the reading of either the final plate or the oscillator plate current.

35 Watt Phone-CW Transmitter

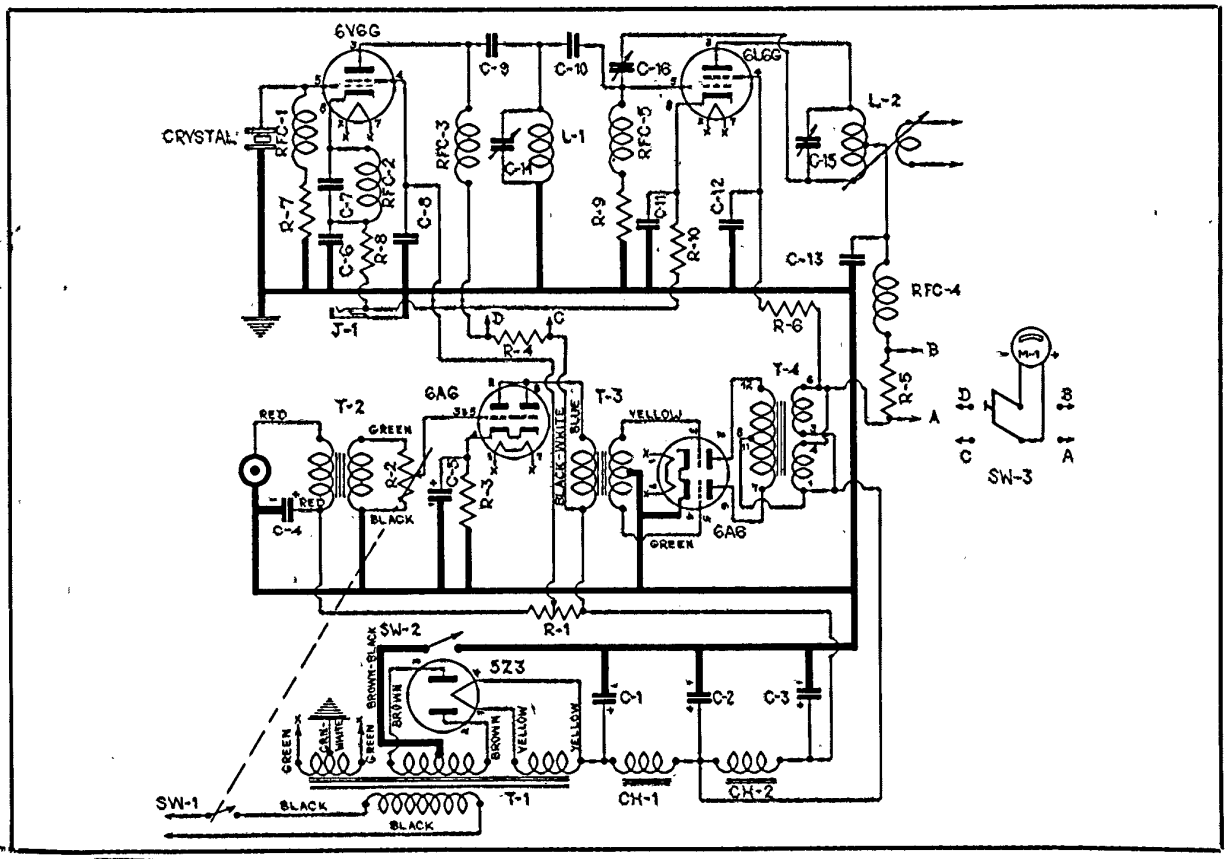

Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-92R21	Power Transformer
T-2	T-86A02	Microphone Transformer
T-3	T-19D06	Driver Transformer
T-4	T-19M13	Modulation Transformer
CH-1	T-13C30	Filter Choke
CH-2	T-74C30	Filter Choke

Resistors:

R-1	20,000 Ohm 25 Watt Semi-Variable Resistor
R-2	500,000 Ohm Volume Control with Switch
R-3	1,000 Ohm 1 Watt Resistor
R-4	50 Ohm 10 Watt Resistor
R-5	50 Ohm 10 Watt Resistor
R-6	3,500 Ohm 10 Watt Resistor
R-7	50,000 Ohm 1 Watt Resistor
R-8	200 Ohm 10 Watt Resistor
R-9	20,000 Ohm 1 Watt Resistor
R-10	200 Ohm 10 Watt Resistor

Condensers:

C-1	8 Mfd. 600 Volt Condenser
C-2, C-3	Double 8 Mfd. 450 Volt Condenser
C-4	10 Mfd. 25 Volt Electrolytic Condenser
C-5	10 Mfd. 25 Volt Electrolytic Condenser
C-6	.002 Mfd. 500 Volt Mica Condenser
C-7	.0001 Mfd. 500 Volt Mica Condenser
C-8	.002 Mfd. 500 Volt Mica Condenser
C-9	.002 Mfd. 1,000 Volt Mica Condenser
C-10	.0001 Mfd. 1,000 Volt Mica Condenser
C-11	.002 Mfd. 1,000 Volt Mica Condenser
C-12	.002 Mfd. 1,000 Volt Mica Condenser
C-13	.002 Mfd. 1,000 Volt Mica Condenser
C-14	100 Mmfd. Variable Condenser
C-15	100 Mmfd. Variable Condenser
C-16	Neutralizing Condenser

RF Chokes:

RFC-1	RF Choke
RFC-2	RF Choke
RFC-3	RF Choke
RFC-4	RF Choke
RFC-5	RF Choke

Miscellaneous Parts:

1	Chassis 14" x 10" x 3" (Punched and Drilled)
1	Panel (Punched and Drilled)
1	Cabinet
4	Feed-thru Insulators
2	5-Contact Sockets, Steatite
2	7-Contact Sockets, Large
2	Octal Sockets
1	4-Contact Socket
1	5-Contact Socket
1	Switch Plate
1	SPST Switch
1	DPDT Toggle Switch
1	Mic. Input Plug
1	Input Plug Shield
3	Knobs
2	Name Plates Marked "CRYSTAL OSC. PLATE"
2	Name Plates Marked "POWER AMP. PLATE"
1	Name Plate Marked "A.F. GAIN"
1	Name Plate Marked "PLATE VOLTAGE"
1	Name Plate Marked "MICROPHONE"

Miscellaneous Parts: (Cont.)

1	Circuit Closing Jack
1	Line Cord and Plug

Miscellaneous nuts, bolts, soldering and mounting lugs, lock-washers and other hardware.

Accessories:

1	L-1 160 Meter RF Coil, End Linked, Bud Type OEL-160 or Equivalent
1	L-1 80 Meter RF Coil, End Linked, Bud Type OEL-80 or Equivalent
1	L-1 40 Meter RF Coil, End Linked, Bud Type OEL-40 or Equivalent
1	L-1 20 Meter RF Coil, End Linked, Bud Type OEL-20 or Equivalent
1	L-1 10 Meter RF Coil, End Linked, No Tap Bud Type OEL-10 or Equivalent
1	L-2 160 Meter RF Coil, Center Linked, Center Tapped, Bud Type OLS-160 or Equivalent
1	L-2 80 Meter RF Coil, Center Linked, Center Tapped, Bud Type OLS-80 or Equivalent
1	L-2 40 Meter RF Coil, Center Linked, Center Tapped, Bud Type OLS-40 or Equivalent
1	L-2 20 Meter RF Coil, Center Linked, Center Tapped, Bud Type OLS-20 or Equivalent
1	L-2 10 Meter RF Coil, Center Linked, Center Tapped, Bud Type OLS-10 or Equivalent
1	0-150 MA DC Meter, 2" Square Case, No Illumination Triplett 227-A or Equivalent
1	Crystal
1	6V6G Tube
1	6L6-G or 6L6GX Tube
1	5Z3 Tube
2	6A6 Tubes

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

50 Watt 5 and 10 Meter Phone Transmitter

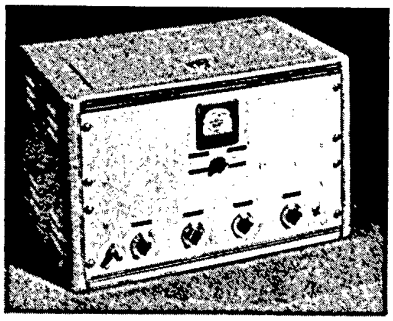

Cabinet View

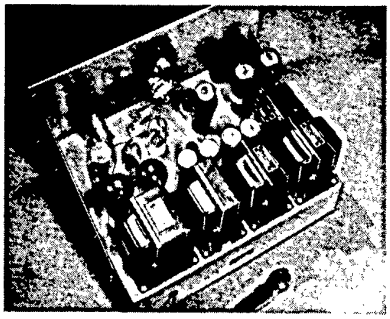

Chassis View

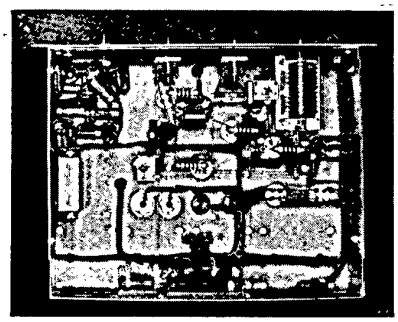

Bottom View

THIS transmitter, designed especially for operation on the 5 and 10 meter bands, includes on one chassis a 50 watt RF section, a 25 watt modulator and the power supplies for both the RF section and modulator.

The tube line-up for the RF section is a 6L6-G tri-tet oscillator, an HK-24 doubler and an HK-24 final amplifier.

The 6L6-G oscillator uses 40 and 20 meter crystals for transmitter outputs on 10 and 5 meters respectively. The plate tank of the tri-tet is always to be tuned to a frequency double that of the crystal, and in this condition good outputs are obtained. Attempts to operate the oscillator plate tank at the crystal frequency when using a 6L6-G are likely to damage the crystal. The coil and condenser combination, L-1 and C-1, has been chosen to give a good oscillator output with reasonably low crystal current.

The HK-24 driven by the oscillator is not neutralized and is always used as a doubler stage delivering power on 10 and 5 meters. The crystal oscillator and doubler stages operate at a plate voltage of 400 volts, and the voltage on the screen-grid of the oscillator is 250.

The HK-24 final amplifier is a conventional Class C stage using a split-stator tank condenser with plate neutralization. Neutralization is accomplished as easily as in transmitters operated at lower frequencies. The neutralizing condenser, C-15, is located on the under side of the chassis and is supported by the large wire connected to its terminals. It should always be adjusted with a non-metallic screw driver.

The oscillator cathode and plate tank coils are wound on 1" forms, and the doubler and final amplifier coils are self-supporting coils wound with large copper wire and mounted on National type PB-16 plugs. The doubler plate tank is capacity coupled to the final amplifier grid, and power is taken from the final amplifier plate coil by means of a link which is supported on the coil base terminals. When properly loaded, the final amplifier plate current is 60 MA at 800 volts. The plate transformer has a nominal rating of 750 volts DC, but because of the light loading the higher plate voltage is obtained. The excitation of the final amplifier tube is such that 25 to 30 MA grid current is obtained. The cathode tank of the tri-tet oscillator should be adjusted for the maximum output consistent with good oscillator stability. It will be found that this occurs with the 100 mmfd. cathode condenser, C-1, at about one-half of its maximum capacity.

A meter, M-1, and meter switch, SW-3, are provided for metering the current to the oscillator plate, the doubler plate, the final amplifier grid and the final amplifier plate.

The modulator uses two 6L6-G tubes in push-pull and operates at a plate voltage of 400 and a screen-grid voltage of 260, operating in Class AB_1. The audio amplifier tube line-up is one 6J7 pentode, one 6J7 triode and one 6N7 phase invertor. This arrangement provides high gain for use with crystal microphones.

The power supply uses a single transformer to supply all filaments and a dual plate transformer to supply two separate rectifiers. These transformers are controlled by separate

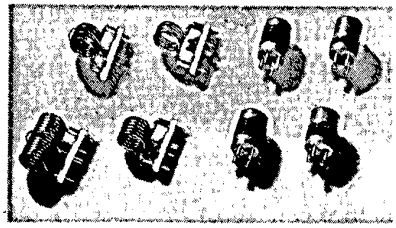

Coil	10 Meter Operation				5 Meter Operation			
	Turns	Wire Size	Diam. of Winding	Winding Length	Turns	Wire Size	Diam. of Winding	Winding Length
L-1	10	No. 16 Enam.	1"	Close Wound	4	No. 16 Enam.	1"	Close Wound
L-2	11	No. 16 Enam.	1"	⅞"	6	No. 16 Enam.	1"	¾"
L-3	7	No. 10 Bare	1"	1"	3	No. 8 Bare	1"	¾"
L-4	16 Center-Tapped	No. 10 Bare	1"	2"	6 Center-Tapped	No. 8 Bare	1"	1"

Link coupled to L-4 is of No. 14 bare copper wire 1½" in diam. wound over the center of the plate tank coil and supported by the lugs attached to the pins on the PB-16 base. For 10 meters a 2 turn link is used; for 5 meters, a 1 turn link. Coils L-1 and L-2 are wound on 1" forms, Millen No. 45004. Coils L-3 and L-4 are self-supporting on National PB-16 plugs.

50 Watt 5 and 10 Meter Phone Transmitter

switches on the panel. The filament switch, SW-1, is associated with the audio amplifier gain control, and the plate switch, SW-2, is of the toggle type placed in a position for convenient operation. The 400 volt supply delivers the current required by the oscillator, doubler, modulator and audio stages. It uses a type 5Z3 rectifier tube. The 800 volt supply handles the final plate power only. Although this transformer is rated at 400 and 750 volts, it is being operated at less than full load so that advantage may be taken of the higher-than-normal voltage available. Economy in the filtering of the two high voltage power supplies is obtained by using the same chokes for filtering the output of both rectifier systems. These chokes are in series with the center tap of the dual plate transformer.

The complete unit is contained on a chassis 17" x 13" x 3" and is attached to a panel 19" x 12¼" with the conventional type of chassis mounting brackets. The chassis, panel and chassis mounting brackets are finished in gray flat enamel, giving an unusually attractive appearance with the chromium dial plates. The transmitter may be enclosed in a cabinet or mounted in a rack with other equipment.

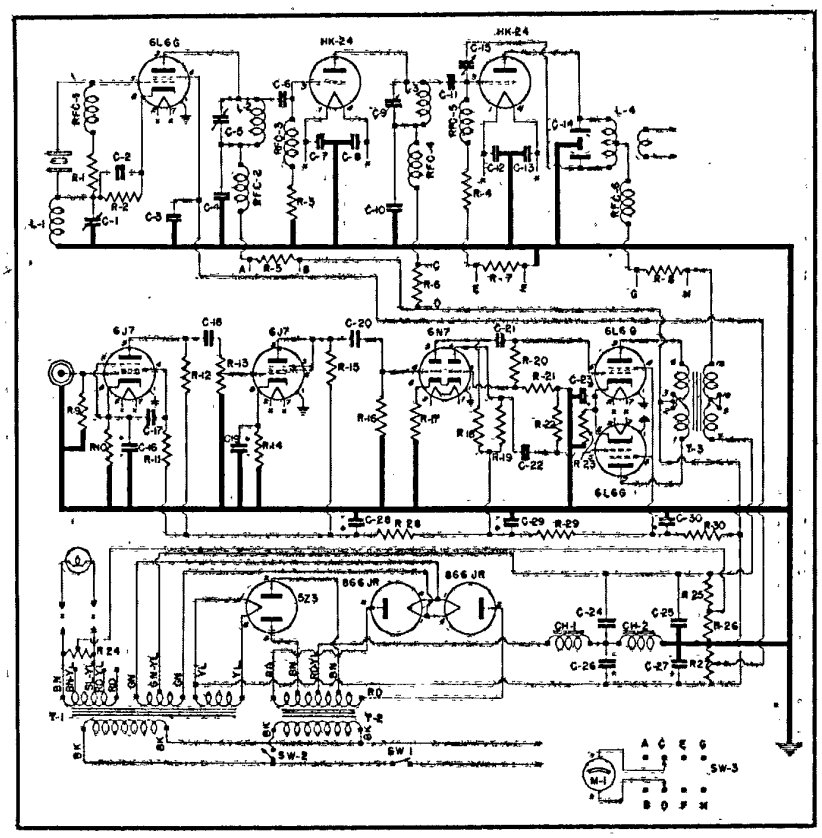

Parts Required

THORDARSON TRANSFORMERS and CHOKES:

T-1	T-19F77	Filament Transformer
T-2	T-19P70	Plate Transformer
T-3	T-19M14	Modulation Transformer
CH-1	T-75C51	Choke
CH-2	T-75C51	Choke

Resistors:

R-1	50,000 Ohm 1 Watt Resistor
R-2	350 Ohm 10 Watt Resistor
R-3	10,000 Ohm 10 Watt Resistor
R-4	2,500 Ohm 10 Watt Resistor
R-5	50 Ohm 10 Watt Resistor
R-6	50 Ohm 10 Watt Resistor
R-7	50 Ohm 10 Watt Resistor
R-8	50 Ohm 10 Watt Resistor
R-9	5 Megohm ½ Watt Resistor
R-10	5,000 Ohm 1 Watt Resistor
R-11	3 Megohm ½ Watt Resistor
R-12	500,000 Ohm ½ Watt Resistor
R-13	1 Megohm Volume Control with Switch
R-14	5,000 Ohm 1 Watt Resistor
R-15	100,000 Ohm 1 Watt Resistor
R-16	250,000 Ohm ½ Watt Resistor
R-17	2,000 Ohm ½ Watt Resistor
R-18	100,000 Ohm 1 Watt Resistor
R-19	100,000 Ohm 1 Watt Resistor
R-20	250,000 Ohm ½ Watt Resistor
R-21	12,000 Ohm ½ Watt Resistor
R-22	250,000 Ohm ½ Watt Resistor
R-23	250 Ohm 10 Watt Resistor
R-24	20 Ohm 10 Watt Center Tapped Resistor
R-25	40,000 Ohm 50 Watt Resistor
R-26	300 Ohm 10 Watt Resistor
R-27	20,000 Ohm 50 Watt Semi-Variable Resistor
R-28	20,000 Ohm 1Watt Resistor
R-29	20,000 Ohm 1 Watt Resistor
R-30	7,500 Ohm 25 Watt Semi-Variable Resistor

Condensers:

C-1	100 Mmfd. Variable Condenser
C-2	.01 Mfd. 400 Volt Condenser
C-3	.002 Mfd. 1,000 Volt Mica Condenser
C-4	.002 Mfd. 1,000 Volt Mica Condenser
C-5	35 Mmfd. Variable Condenser
C-6	.0001 Mfd. 1,000 Volt Mica Condenser
C-7	.002 Mfd. 1,000 Volt Mica Condenser
C-8	.002 Mfd. 1,000 Volt Mica Condenser
C-9	35 Mmfd. Variable Condenser
C-10	.002 Mfd. 1,000 Volt Mica Condenser
C-11	.0001 Mfd. 1,000 Volt Mica Condenser
C-12	.002 Mfd. 1,000 Volt Mica Condenser
C-13	.002 Mfd. 1,000 Volt Mica Condenser
C-14	35-35 Mmfd. Variable Condenser
C-15	Neutralizing Condenser
C-16	10 Mfd. 25 Volt Electrolytic Condenser
C-17	.04 Mfd. 400 Volt Condenser
C-18	.04 Mfd. 400 Volt Condenser
C-19	10 Mfd. 25 Volt Electrolytic Condenser
C-20	.1 Mfd. 400 Volt Condenser
C-21	.1 Mfd. 400 Volt Condenser
C-22	.1 Mfd. 400 Volt Condenser
C-23	10 Mfd. 25 Volt Electrolytic Condenser
C-24	2 Mfd. 1,000 Volt Condenser
C-25	2 Mfd. 1,000 Volt Condenser
C-26	8 Mfd. 600 Volt Electrolytic Condenser
C-27	8 Mfd. 600 Volt Electrolytic Condenser
C-28, C-29, C-30	Triple 8 Mfd. 450 V Electrolytic Condenser

RF Chokes:

RFC-1	RF Choke
RFC-2	RF Choke
RFC-3	RF Choke
RFC-4	RF Choke
RFC-5	RF Choke
RFC-6	RF Choke

Miscellaneous Parts:

1	Chassis 17" x 13" x 3" (Punched and Drilled)
1	Panel 19" x 12¼" (Punched and Drilled)
1	Pr. Chassis Mounting Brackets
6	Octal Sockets
1	4-Contact Socket
6	4-Contact Sockets, Isolantite
2	Plug-in Sockets
4	Plug-in Bases
4	Coil Forms
1	Crystal Socket
4	Knobs
1	Pointer Knob
1	SPST Switch, N. P.
1	Double-Pole, 4-Throw Switch, Isolantite
1	Input Plug
1	Input Shield
2	Metal Tube Grid Caps
2	Metal Tube Grid Cap Shields
2	Name Plates Marked "POWER AMP. PLATE"
1	Name Plate Marked "POWER AMP. GRID"
2	Name Plates Marked "BUFFER PLATE GRID"
2	Name Plates Marked "CRYSTAL OSC. PLATE"
1	Name Plate Marked "AF GAIN"
1	Line Cord and Plug

Miscellaneous nuts, bolts, soldering and mounting lugs, lock-washers and other hardware.

Accessories:

1	0-150 MA DC Meter 3" Square Case, Rear Illumination, Triplett 327A or Equivalent		
1	Cabinet	3	6L6-G or 6L6GX Tubes
1	Crystal	1	5Z3 Tube
2	6J7 Tubes	2	866-JR Tubes
1	6N7 Tube	2	HK-24 Tubes

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

55 Watt Phone, 80 Watt CW Transmitter

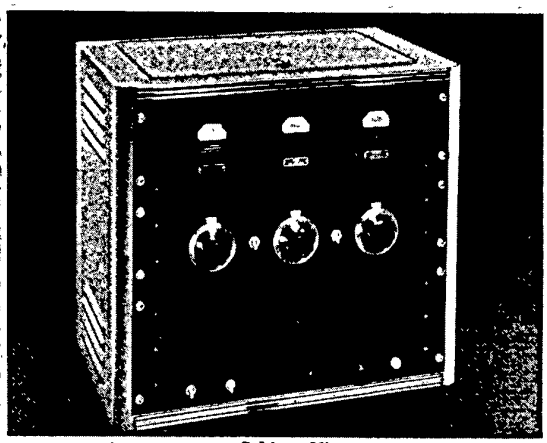

Cabinet View

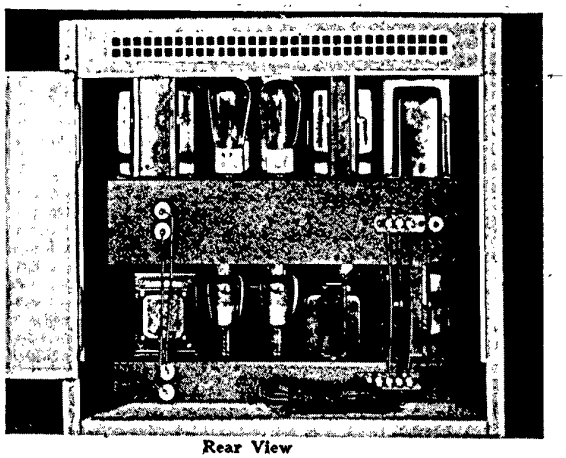

Rear View

COMPACTNESS, reliability, ease of operation and neatness of appearance are salient features of this 55 watt phone and 80 watt CW transmitter. Designed with entirely separate audio and RF sections and each having its own power supply, either of these two matched units may be used separately. For the CW operator the compact and neat appearing RF section is a pleasure to have on the operating table or in the rack. Operating with 80 watts input, the high plate efficiency of the final stage not only makes it an outstanding transmitter but also a highly desirable exciter unit for transmitters having inputs as high as 500 watts. Circuits are strictly conventional, and components are conservatively chosen.

The modulator, with an output of 30 watts, easily modulates the 55 watt Class C input of the RF amplifier. The high gain (122 db) enables it to modulate the transmitter 100% with very weak audio signals. With the Multi-Match modulation transformer the amateur may use it to modulate any transmitter requiring 30 watts of audio power.

The RF line-up is as follows: a 6F6-G crystal oscillator stage, a 6L6-G buffer-doubler stage, and an 809 final amplifier stage. The 6F6-G operates with 320 volts on the plate and 270 volts on the screen-grid. The 6L6-G operates with a plate voltage of 340 volts and a screen-grid voltage of 250. For phone operation the voltage on the 809 plate is 625 volts, and for CW operation this voltage is raised to 785.

The oscillator stage operates with all crystals from 160 to 10 meters, but for best stability and freedom from "chirps" it is recommended that for 10 meter operation a 20 meter crystal be used and doubling be carried on in the buffer-doubler stage. When the crystal stage is in an oscillating condition and is loaded by the grid of the next stage, the oscillator plate current is approximately 30 to 40 MA. The buffer-doubler stage is neutralized and may be used with excellent results either for frequency multiplying or as a regular buffer. When using 160 and 80 meter crystals, not only is doubling easily accomplished in the second stage but enough output can be obtained by quadrupling to give good excitation to the 809 grid on 40 and 20 meters. When the 6L6-G is driving the 809 grid to 30 MA of grid current, the plate current of the 6L6-G is on the order of 70 MA. The antenna loading should be adjusted so that the final amplifier plate current is 88 MA for a 55 watt phone input. For an 80 watt CW input the loading is adjusted so that the final amplifier plate current is 102 MA. The secondary of the plate transformer supplying energy to the final amplifier is equipped with taps so that by merely changing these taps the change from 625 volts for phone operation to 785 volts for CW operation may be made. Correct tuning of the buffer-doubler plate circuit is accomplished by noting the grid current reading of the final amplifier stage. Care should be taken that the 6L6-G plate circuit is not tuned to some undesired harmonic of the crystal frequency.

The same final tank coil is used for operation on 80 and 160 meters. For 160 meter operation a fixed air condenser is plugged into the jack-base which is shown in the top view of the RF section on page 9. If the amateur does not desire operation on 160 meters, it is unnecessary to have the Cardwell JB base or the Cardwell JD-80-OS condenser. The spacing of the final tank condenser is 0.070", which is greater than is usually found for use with the voltages encountered in this circuit. However, such spacing permits grounding of the rotor. Should the amateur wish to build for CW operation only, a spacing of 0.050" is satisfactory.

The modulator has for its output stage two 6L6-G's operating in Class AB1. At no-signal the plate-to-ground (-B) voltage is 390 volts. The screen-grid voltage to ground should be adjusted by means of R-14 to a value of 310 volts. In this condition the voltage measured from cathode to ground across R-13 is 20 volts.

The three stages before the output stage provide adequate gain for the use of this modulator with all types of microphones. The input to the first stage, a pentode-connected 6J7, is shielded to avoid hum pick-up and to prevent pick-up of RF energy. As a further precaution against the entrance of RF energy to the grid of this stage, a filter consisting of C-1, RFC-1 and C-2 is installed in the input circuit. These elements, in addition to the grid lead and R-1, are carefully shielded with pieces of tinned copper. The result is that with the volume control wide open, the amplifier operates perfectly; and the residual hum is 45 to 50 db below the full output power.

(Continued on Page 10)

THORDARSON TRANSFORMER SPECIALISTS SINCE 1895

55 Watt Phone, 80 Watt CW Transmitter

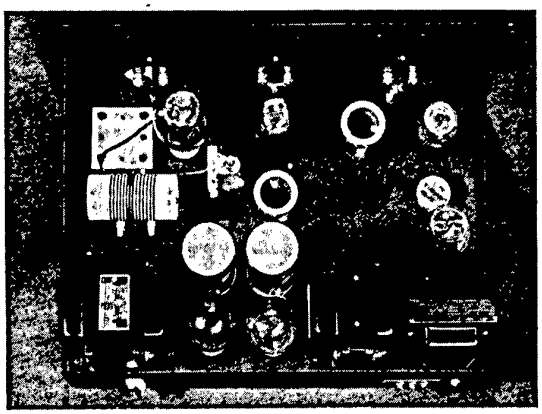

Top View of RF Section

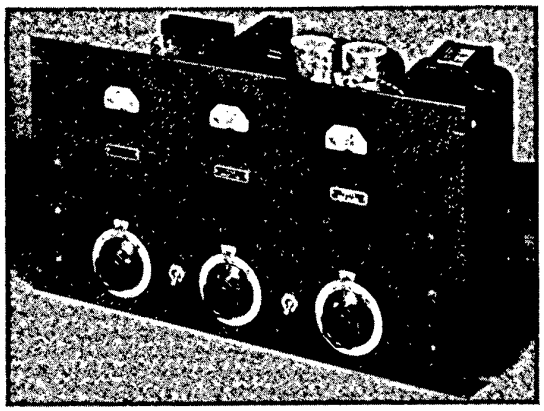

Front View of RF Section

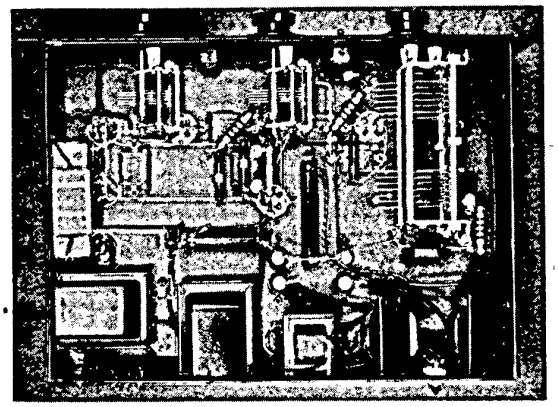

Bottom View of RF Section

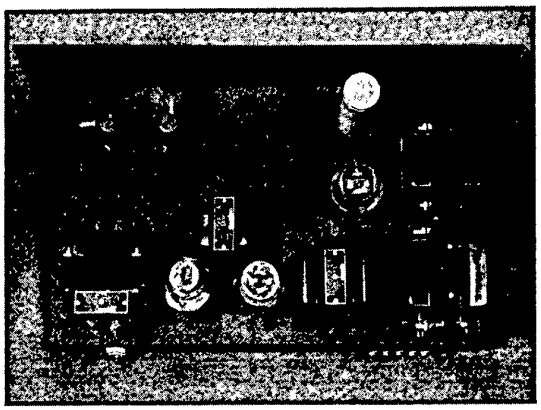

Top View of Modulator

COIL DATA — 55 or 80 WATT TRANS.

Band	L-1 AND L-2			L-3			
	Turns	Winding Length	Wire Size	Turns	Winding Length	Wire Size	Link Turns
160	58	1 9/16"	#22	42	1 3/4"	#18	4
80	30	1 3/8"	#18	42	1 3/4"	#18	4
40	16	1 3/8"	#18	32	2 3/8"	#18	4
20	8	1 1/4"	#18	14	2"	#16	2
10	4	1 1/4"	#18	6	1 1/4"	#16	1

L-1 and L-2 are wound on Hammarlund XP-53 Coil Forms. The coil ends are connected to No. 1 and No. 4 pins. L-2 is center-tapped, the tap being brought out on pin No. 3. L-3 is wound on National XR-13 Coil Forms attached to a PB-5 plug. Link is wound with insulated wire directly over bare wire of plate coil.

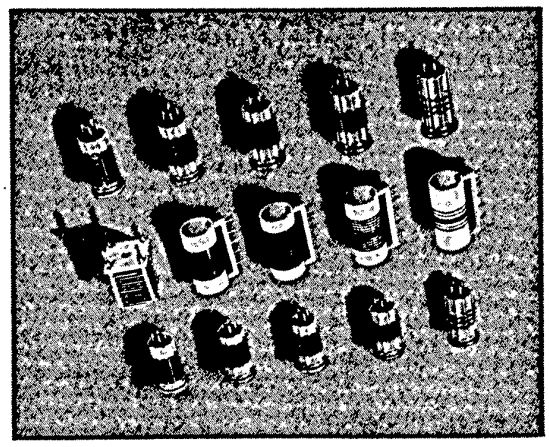

Plug-In Coils

55 Watt Phone, 80 Watt CW Transmitter

RF Section

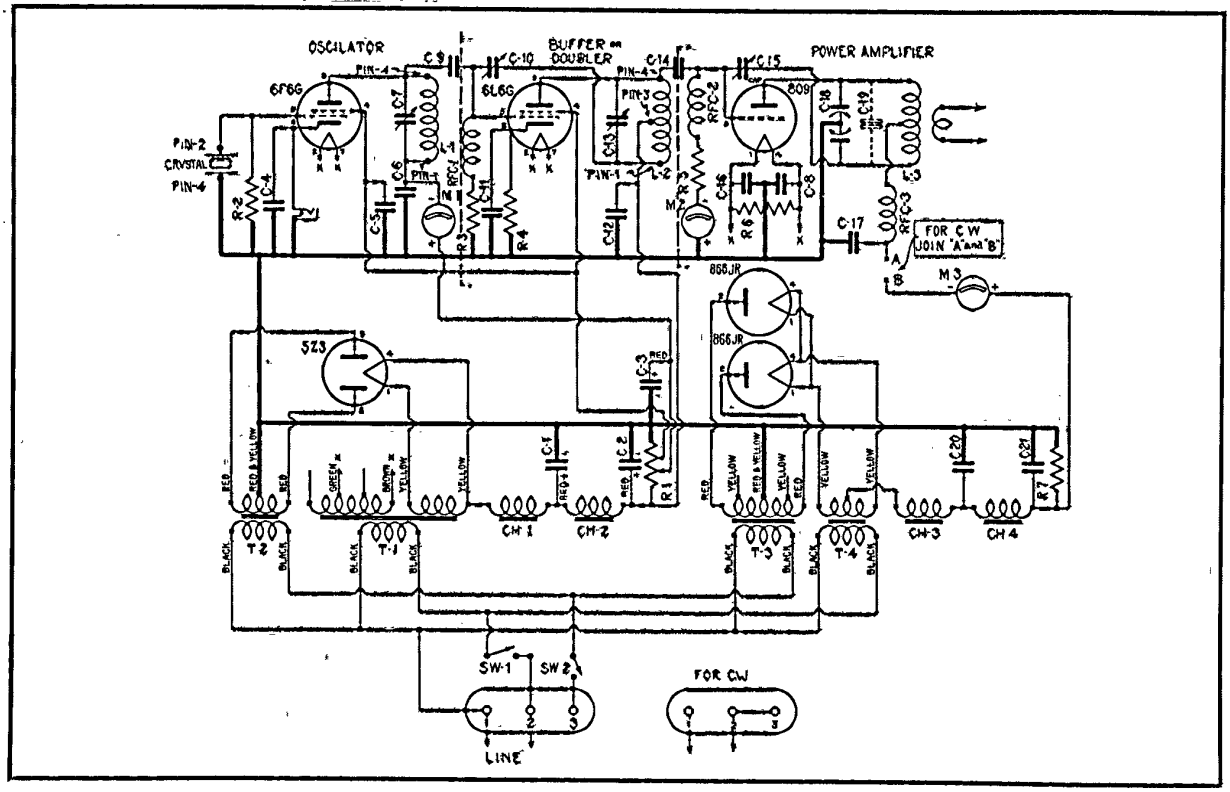

(Continued from Page 8)

The power supply for the RF unit consists of two rectifier systems, one using a 5Z3 to supply the plates and screen-grids of the two low power stages and the other using a pair of 866-JR's to supply the plate of the final amplifier. The power supply on the modulator chassis uses a 5Z3. On each chassis there is a separate filament supply. On the RF chassis and on the modulator chassis there are two switches, one for the filament supply and one for the plate supply. Thus, one unit can be operated independently of the other. When using the RF unit alone for CW operation, join terminals No. 2 and No. 3 and connect the 115 volt supply line to terminals No. 1 and No. 2. In this condition of operation SW-1 controls the filaments and SW-2 controls the plate supplies. For phone operation, in which it is desired that a single switch operate all plate supplies, connect the 115 volt supply line to terminals No. 4 and No. 5 on the modulator chassis; then connect terminals No. 1, No. 2 and No. 3 on the modulator to their respectively numbered terminals on the RF chassis. On the RF chassis, close SW-1 and SW-2. Then, on the modulator chassis, SW-1 controls all the filaments and SW-2 controls all the plate supplies.

Parts Required

THORDARSON TRANSFORMERS and CHOKES:

T-1	T-19F76	Filament Transformer
T-2	T-19P54	Plate Transformer
T-3	T-19P56	Plate Transformer
T-4	T-19F88	Filament Transformer
CH-1	T-19C39	Input Choke
CH-2	T-19C46	Smoothing Choke
CH-3	T-57C53	Filter Choke
CH-4	T-57C53	Filter Choke

Resistors:

R-1	7,500 Ohm 50 Watt Resistor
R-2	50,000 Ohm 1 Watt Resistor
R-3	50,000 Ohm 10 Watt Wirewound Resistor
R-4	350 Ohm 10 Watt Wirewound Resistor
R-5	3,500 Ohm 10 Watt Wirewound Resistor
R-6	20 Ohm 10 Watt Center Tapped Resistor
R-7	20,000 Ohm 50 Watt Wirewound Resistor

Condensers:

C-1	4 Mfd. 600 Volt Condenser
C-2	4 Mfd. 475 Volt Condenser
C-3	4 Mfd. 475 Volt Condenser
C-4	.002 Mfd. 1,000 Volt Mica Condenser
C-5	.002 Mfd. 1,000 Volt Mica Condenser
C-6	.002 Mfd. 1,000 Volt Mica Condenser
C-7	100 Mmfd. Variable Condenser
C-8	.001 Mfd. 1,000 Volt Mica Condenser
C-9	.0001 Mfd. 1,000 Volt Mica Condenser
C-10	Neutralizing Condenser
C-11	.002 Mfd. 1,000 Volt Mica Condenser
C-12	.002 Mfd. 1,000 Volt Mica Condenser
C-13	100 Mmfd. Variable Condenser
C-14	.0001 Mfd. 1,000 Volt Mica Condenser
C-15	Neutralizing Condenser
C-16	.001 Mfd. 1,000 Volt Mica Condenser
C-17	.001 Mfd. 2,500 Volt Mica Condenser
C-18	100-100 Mmfd. Variable Condenser
C-20	2 Mfd. 1,000 Volt Oil Filled Condenser
C-21	2 Mfd. 1,000 Volt Oil Filled Condenser

RF CHOKES:

3	RF Chokes

Miscellaneous Parts:

1	Chassis 17" x 12" x 4" (Punched & Drilled)
1	Panel 10½" x 19" (Punched & Drilled)
1 Pr.	Chassis Mounting Brackets
1	5-Contact Socket
2	Octal Sockets
3	4-Contact Isolantite Sockets
3	4-Contact Sockets
2	Feed-thru Bushings
10	Stand-off Insulators
2	Coil Forms, 4-Prong
1	Phone Jack, Circuit Closing
2	SPST Switches
1	Grid Grip
3	Dials, 2¼" Diameter
1	Coil Form
1	Coil Form Plug
1	Base for PB-5 Plug
1	Name Plate Marked "OSCILLATOR"
1	Name Plate Marked "POWER AMP. GRID"
1	Name Plate Marked "POWER AMP. PLATE"

Miscellaneous nuts, bolts, solder and mounting lugs, lock-washers and other hardware.

Accessories:

1	Coil Form per band National XR13 or Equiv.
1	Coil Form Plug per band National PB-5 or Equivalent
2	Coil Forms per Band Hammarlund XP-53 or Equivalent
1	150 MA DC Meter, 2" Square Case, No Illumination, Triplett 227-A or Equivalent
1	100 MA DC Meter, 2" Square Case, No Illumination, Triplett 227-A or Equivalent
1	250 MA DC Meter, 2" Square Case, No Illumination, Triplett 227-A or Equivalent
1	Cabinet
1	Crystal
1	6F6-G Tube
1	6L6-G or 6L6 GX Tube
1	809 Tube
1	5Z3 Tube
2	866-JR Tubes
1	Jack Base Cardwell JB
1	80 Mmfd. Fixed Air Condenser (C-19) Cardwell JD-80-OS (Used only on 160 Meters)

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

THORDARSON TRANSFORMER SPECIALISTS SINCE 1895

55 Watt Phone, 80 Watt CW Transmitter

Modulator Section

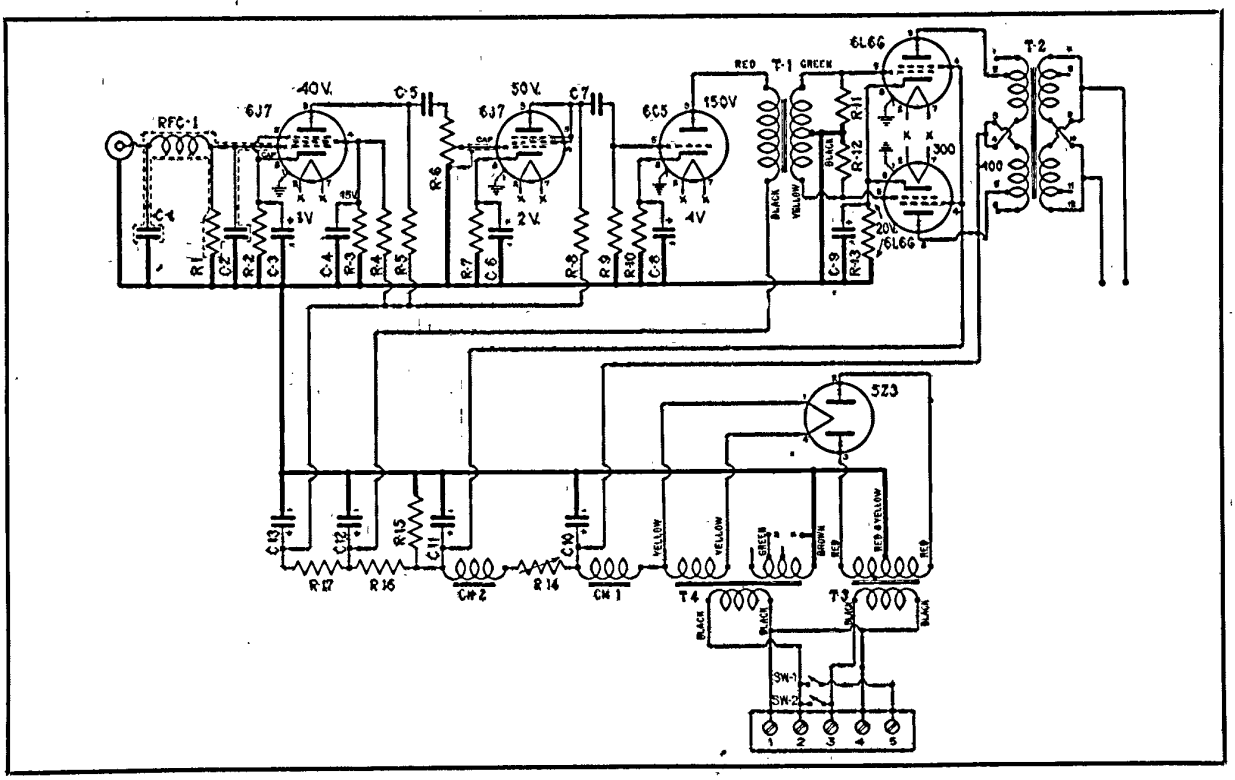

Parts Required

THORDARSON TRANSFORMERS and CHOKES:

T-1	T-74A31	Push-pull Input Transformer
T-2	T-19M14	Modulation Transformer
T-3	T-19P54	Plate Transformer
T-4	T-19F76	Filament Transformer
CH-1	T-17C00-B	Filter Choke
CH-2	T-13C27	Filter Choke

Resistors:

R-1	5 Megohm ½ Watt Resistor
R-2	5,000 Ohm ½ Watt Resistor
R-3	25,000 Ohm 1 Watt Resistor
R-4	250,000 Ohm ½ Watt Resistor
R-5	500,000 Ohm ½ Watt Resistor
R-6	1 Megohm Volume Control
R-7	2,500 Ohm 1 Watt Resistor
R-8	100,000 Ohm 1 Watt Resistor
R-9	250,000 Ohm ½ Watt Resistor
R-10	1,000 Ohm 1 Watt Resistor
R-11	50,000 Ohm 1 Watt Resistor
R-12	50,000 Ohm 1 Watt Resistor
R-13	150 Ohm 25 Watt Resistor
R-14	2,500 Ohm 25 Watt Semi-Variable Resistor
R-15	12,000 Ohm 25 Watt Resistor
R-16	20,000 Ohm 1 Watt Resistor
R-17	20,000 Ohm 1 Watt Resistor

Condensers:

C-1	.0001 Mfd. 500 Volt Mica Condenser
C-2	.0001 Mfd. 500 Volt Mica Condenser
C-3	10 Mfd. 25 Volt Condenser
C-4	.03 Mfd. 400 Volt Condenser
C-5	.1 Mfd. 400 Volt Paper Condenser
C-6	10 Mfd. 25 Volt Condenser
C-7	.1 Mfd. 400 Volt Condenser
C-8	10 Mfd 25 Volt Condenser
C-9	10 Mfd. 50 Volt Condenser
C-10	8 Mfd. 600 Volt Condenser
C-11, C-12, C-13	Triple 8 Mfd. 450 Volt Condenser

RF Choke:

RFC-1	RF Choke

Miscellaneous Parts:

1	Chassis 17" x 10" x 2" (Punched and Drilled)
1	Panel 19" x 7" (Punched and Drilled)
1	5-Lug Terminal Board
1 Pr.	Chassis Mounting Brackets
2	Feed-thru Bushings
5	Octal Sockets
1	4-Contact Socket
1	Dial Plate Marked "GAIN"
1	Microphone Input Plug
1	Microphone Input Plug Shield

Miscellaneous Parts: (Cont.)

2	SPST Switches
2	Metal Tube Grid Caps

Miscellaneous nuts, bolts, resistor and mounting lugs, lock-washers, and other hardware.

Accessories:

1	Cabinet		
1	Crystal		
2	6J7 Tubes	2	6L6-G Tubes
1	6C5 Tube	1	5Z3 Tube

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

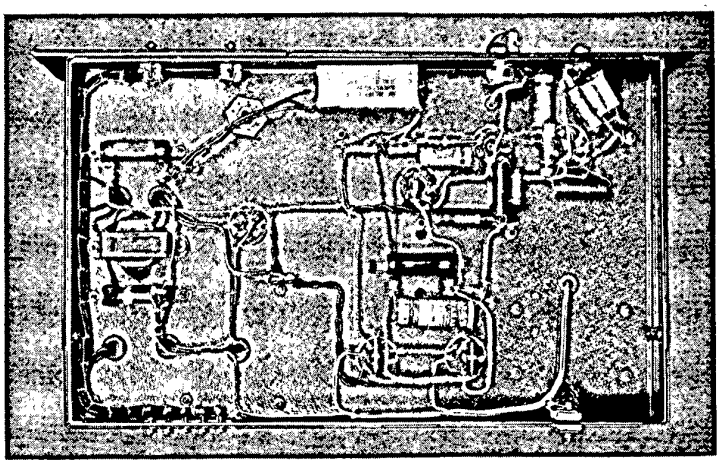

Bottom View of Modulator

12 Watt Mobile Transmitter for 5-10 Meters

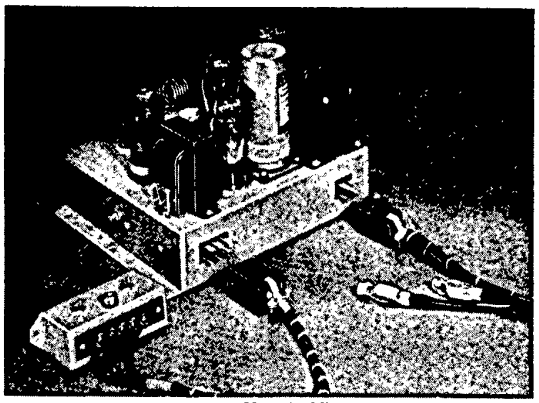

Chassis View

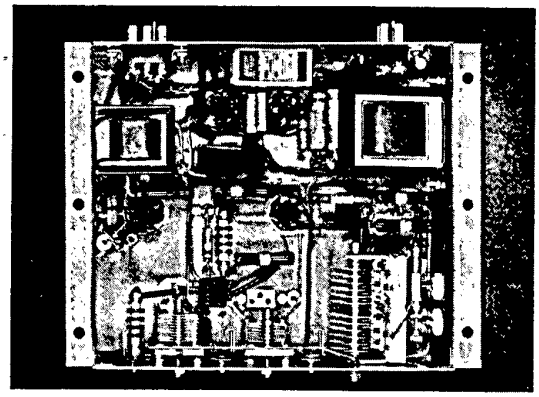

Bottom View

PORTABLE mobile operation on 5 and 10 meters is the distinctive feature of this unit. It is of a rugged chassis type construction especially planned to be used in automobiles. It operates from a 6 volt storage battery using a vibrator power supply which may be remotely controlled from a point several feet away, as for example, a driver's seat.

The RF tube line-up is as follows: a 6V6-G tri-tet crystal oscillator, and a T-21 final amplifier. The oscillator stage operates with a 20 meter crystal, and doubling is carried on in the plate circuit. At no time is operation of the crystal stage "straight through" recommended. The oscillator plate tank is capacity-coupled to the T-21 grid. The T-21 operates "straight through" on 10 meters, and for 5 meter operation doubling in the final is accomplished. The final tank condenser is of the split-stator type. The final amplifier is neutralized in a conventional manner. The cathode tank coil is wound on a 1" form, and the oscillator plate and final plate tank coils are wound on National PB-16 bases with heavy copper wire. Power is taken from the final tank by means of a link.

The power input to the final amplifier plate when it is properly loaded is of the order of 10-12 watts. The final stage cathode current should be between 50 and 55 MA.

Since the transmitter will be operated in an unattended condition, the three variable condenser adjustments are made with a screw driver and then locked with special nuts. The metering of the oscillator cathode current, the final grid current and the final cathode current is done by plugging in an external meter in the jacks provided.

A single 6V6-G tube operates as a Class A amplifier to modulate the T-21 tube. Provision is made for remotely connecting a carbon microphone to the primary of the microphone transformer which is installed on the under side of the chassis. A control with a screw driver adjustment permits the adjustment of the gain of the audio system to the desired amount.

The power supply uses a vibrator having accessible actuating coil terminals. With such a vibrator it is possible to avoid switching the high current which flows in the primary of the vibrator transformer, and consequently, the control of this vibrator may be done at a distance without the necessity of using connections of high current carrying capacity. The rectifier tube is a 6W5-G. Connections made through socket S-2 to the control box, which may be located at any given convenient place, are such that the closing of switch SW-1 causes the filaments to heat and the current to flow in the microphone circuit. The closing of SW-2 starts the vibrator. Consequently, SW-2 may be used as a stand-by switch. The operator is cautioned against closing SW-2 before the filaments have had time to heat, for the premature closing is likely to damage the 6W5-G.

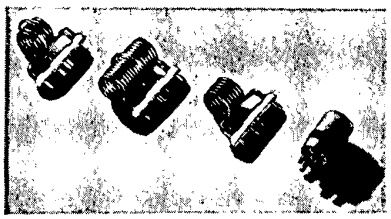

Separate plugs and sockets are provided for the entrance to the chassis of the power supply and the control wiring. This also aids in keeping vibrator noises out of the microphone circuit. As a further precaution against

(Continued on following page)

Coil	Turns	Wire Size	Diam. of Winding	Winding Length	Supporting Form
L-1	5	No. 16 Enameled	1"	Close Wound	Millen No. 45004 Coil Form
L-2	6	No. 10 Bare	1"	1"	Self-Supporting on National PB-16 Plug
L-3 10 Meters	16 Center-Tapped	No. 10 Bare	1"	2"	Self-Supporting on National PB-16 Plug
L-3 5 Meters	6 Center-Tapped	No. 10 Bare	1"	1"	Self-Supporting on National PB-16 Plug

The link on L-3 is made of 1 turn of No. 14 bare copper wire about 1½" in diameter looped around the center portion of L-3 and supported by the terminal lugs on the PB-16 plug.

12 Watt Mobile Transmitter for 5-10 Meters

having any vibrator interference in the microphone circuit, any ripple which is superimposed on the leads from SW-1 is effectively filtered out by the CH-2—C-12 filter. All leads carrying current to the 6V primary of the power transformer should be of heavy wire, No. 16 or larger. This measure must be taken so that the full battery voltage is available at the transformer. Similarly, the wire in the power cable from S-1 to the battery should be large. This precaution also tends to minimize vibrator noise.

The polarity of the battery when connected to the transmitter is not important. However, when installed in an automobile in which one battery serves both the transmitter and the car electrical system, some attention should be given to the polarity. This is especially necessary if the transmitter chassis is in contact with the frame of the car.

In wiring, careful attention should be given to the placement of leads and chassis connections. Wherever possible the leads carrying vibrator current should not be common with those carrying signal currents.

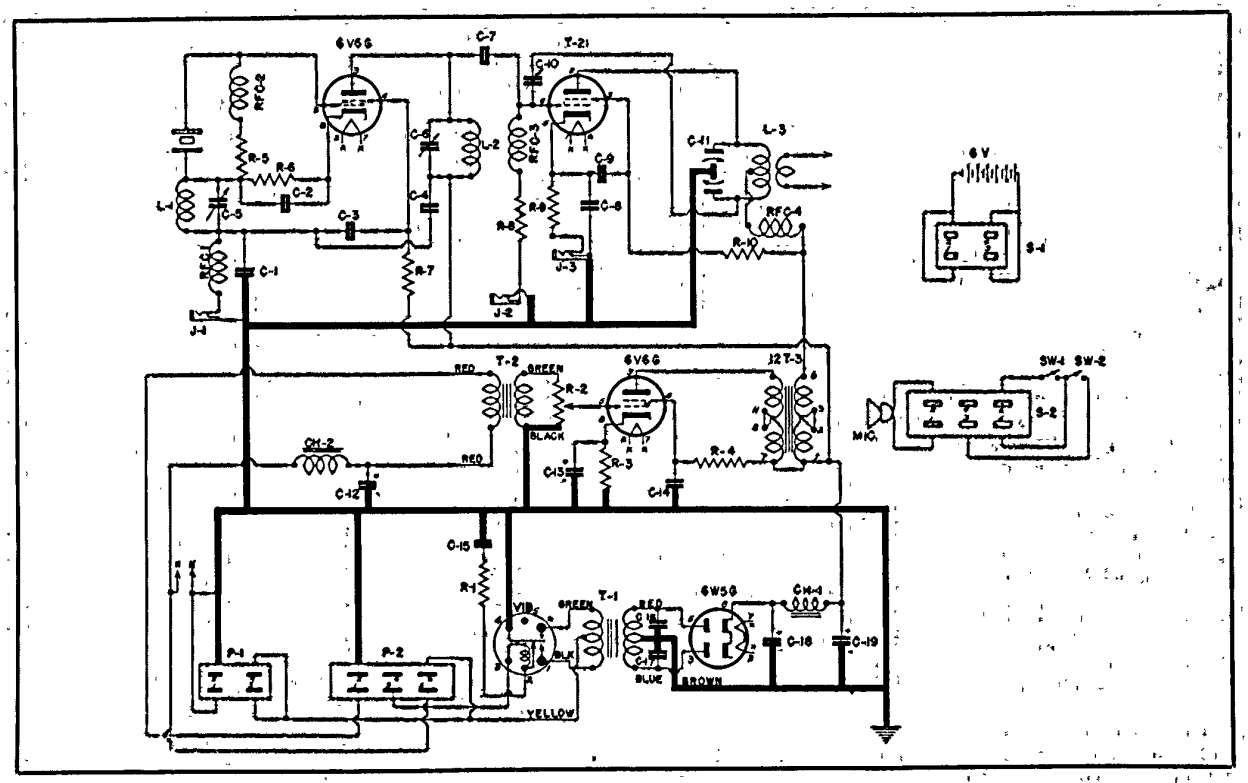

Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-14R38	Power Transformer
T-2	T-86A02	Microphone Transformer
T-3	T-19M13	Modulation Transformer
CH-1	T-57C53	Filter Choke
CH-2	T-14C61	Filter Choke

Resistors:

R-1	200 Ohm 1 Watt Resistor
R-2	500,000 Ohm Volume Control
R-3	300 Ohm 10 Watt Resistor
R-4	20,000 Ohm 10 Watt Resistor
R-5	50,000-Ohm 1 Watt Resistor
R-6	350 Ohm 10 Watt Resistor
R-7	12,000 Ohm 10 Watt Resistor
R-8	50,000 Ohm 1 Watt Resistor
R-9	350 Ohm 10 Watt Resistor
R-10	10,000 Ohm 10 Watt Resistor

Condensers:

C-1	.002 Mfd. 500 Volt Mica Condenser
C-2	.01 Mfd. 400 Volt Condenser
C-3	.002 Mfd. 500 Volt Mica Condenser
C-4	.002 Mfd. 500 Volt Mica Condenser
C-5	100 Mmfd. Variable Condenser

Condensers: (Cont.)

C-6	35 Mmfd. Variable Condenser
C-7	.0001 Mfd. 500 Volt Condenser
C-8	.002 Mfd. 500 Volt Mica Condenser
C-9	.002 Mfd. 500 Volt Mica Condenser
C-10	Neutralizing Condenser
C-11	35-35 Mmfd. Variable Condenser
C-12	100 Mfd. 25 Volt Electrolytic Condenser
C-13	10 Mfd. 25 Volt Electrolytic Condenser
C-14	.1 Mfd. 400 Volt Condenser
C-15	.1 Mfd. 400 Volt Condenser
C-16	.05 Mfd. Oil Impregnated Condenser
C-17	.05 Mfd. Oil Impregnated Condenser
C-18, C-19	Double 8 Mfd. 450 Volt Condenser

RF Chokes:

RFC-1	RF Choke
RFC-2	RF Choke
RFC-3	RF Choke
RFC-4	RF Choke

Miscellaneous Parts:

1	Chassis 11" x 8" x 3" (Punched and Drilled)
1	Vibrator Mounting Plate
1	Bottom Plate

Miscellaneous Parts: (Cont.)

1	Control Box
3	Octal Sockets
1	4-Contact Socket, Steatite
1	6-Contact Socket, Steatite
1	6-Contact Socket
1	6-Prong Plug
1	4-Prong Plug
1	6-Contact Socket
1	4-Contact Socket
2	Feed-thru Insulators
2	Coil Sockets
3	Coil Base Plugs
3	Circuit Closing Jacks
1	Crystal Socket
2	4-Prong Coil Forms
6	Resistor Mounting Strips

Miscellaneous nuts, bolts, soldering and mounting lugs, lock-washers and other hardware.

Accessories:

1	Vibrator, Electronics #427 or Equivalent
1	Crystal
1	T-21 Tube
1	6W5-G Tube
2	6V6-G Tubes

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

TRANSFORMER SPECIALISTS SINCE 1895 THORDARSON

12 Watt Universal Transmitter

FOR PORTABLE AND EMERGENCY SERVICE

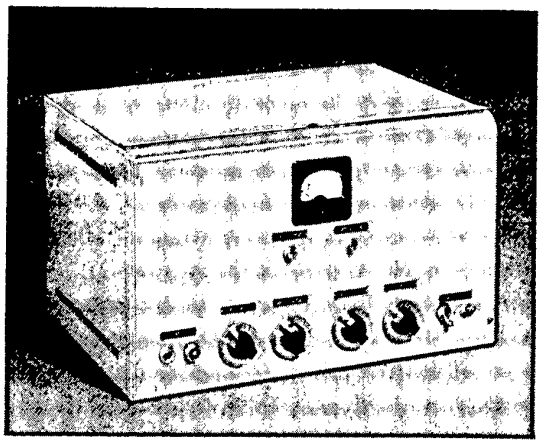

Cabinet View

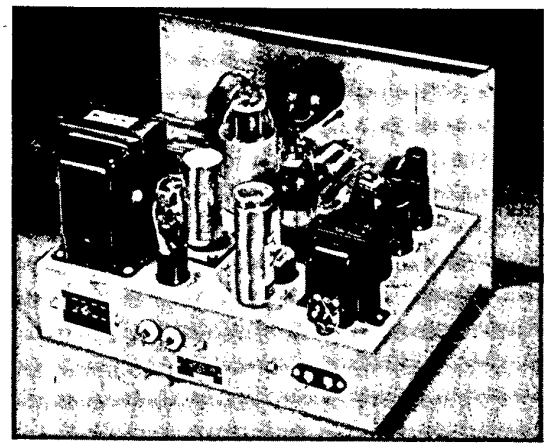

Chassis View

OPERATING on either 115 volts AC or 6 volts DC, this unit not only provides the amateur with an emergency transmitter for battery operation but also may be used as the regular transmitter in the "shack" when so desired. No changes of parts or wiring are necessary for conversion from AC to DC—only the insertion of the proper power plug is required.

On battery operation 10 to 12 watts input may be obtained, and on AC operation, slightly more than 12 watts input may be expected.

The oscillator tube is a 6V6-G used in a regenerative type circuit having an RF choke in the cathode circuit. The final stage uses an 807 tube.

The final tank circuit consists of two condensers, C-10 and C-11, and a coil, L-2. This tank circuit may be used in the conventional manner by turning C-11 to maximum capacity, in which position a bent rotor plate shorts it out and grounds one side of the link. For settings of C-11 less than full capacity, the 807 is working into a pi network having for its elements C-10, C-11 and L-2. A single-wire antenna may then be connected to the high side of C-11, and the degree of loading may be adjusted by varying C-11 and retuning C-10. In all cases C-10 should be tuned for the minimum plate current, and each readjustment of C-11 will require a change of C-10. This provides an easy method of connecting a wide variety of types of single-wire antennas to the transmitter and quickly adjusting to the proper degree of loading. The loading is made greater as the capacity of C-11 is decreased.

A single meter is provided with a switch which permits reading plate current in either the oscillator or the final stage. Because of the excellent shielding and the good circuit layout it was unnecessary to neutralize the 807 tube.

The transmitter may be used on all bands from 160 to 10 meters, and doubling may be accomplished in the crystal stage when using 160, 80 and 40 meter crystals. A closed circuit jack is provided which permits keying the oscillator and amplifier stages simultaneously. Too much grid excitation on the 807 final causes the screen-grid current to become too high. Because the screen-grid voltage is obtained through a dropping resister, this increase in screen current causes the screen-grid voltage to become low enough that the power output capability of the 807 is reduced. In cases where less excitation is desired, the oscillator tank condenser C-6 may be turned toward its minimum capacity setting.

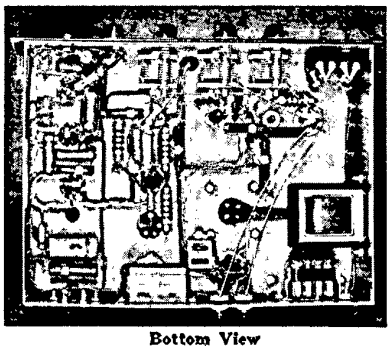

Bottom View

The modulator is a 6V6-G operating Class A, and the audio amplifier section consists of two 6J7 tubes, pentode connected, providing enough gain for operation with a crystal microphone.

The power supply uses a special vibrator transformer which may be used on either 6 volts DC or 115 volts AC. For AC operation the heater voltage for the tubes is obtained from a transformer winding; and for DC operation the heater voltage is obtained directly from the battery.

In DC operation the closing of SW-1 causes the filaments to be heated, and the closing of SW-2 causes the vibrator to operate. A short time should be allowed for the heaters to warm up before closing SW-2. Unless such a precaution is taken, there is possibility of damaging the 6W5-G tube.

In AC operation SW-1 should be closed, and the complete power supply is then controlled by SW-2. To provide a source of high voltage DC for the operation of receivers or any other auxiliary equipment, a switch is provided on the meter panel which removes the plate voltage from the tubes in the transmitter and makes it available at a terminal board to which may be connected any other equipment. This switch, SW-3, can then be used as a stand-by switch between transmissions. This source of voltage is available in either AC or DC operation. It is an extremely handy way of supplying the high voltage required for a receiver. Currents up to 100 MA may be drawn from the supply for use on external equipment.

The complete transmitter is mounted in a small metal cabinet and the entire unit, including the cabinet, is finished in gray flat enamel.

12 Watt Universal Transmitter

FOR PORTABLE AND EMERGENCY SERVICE

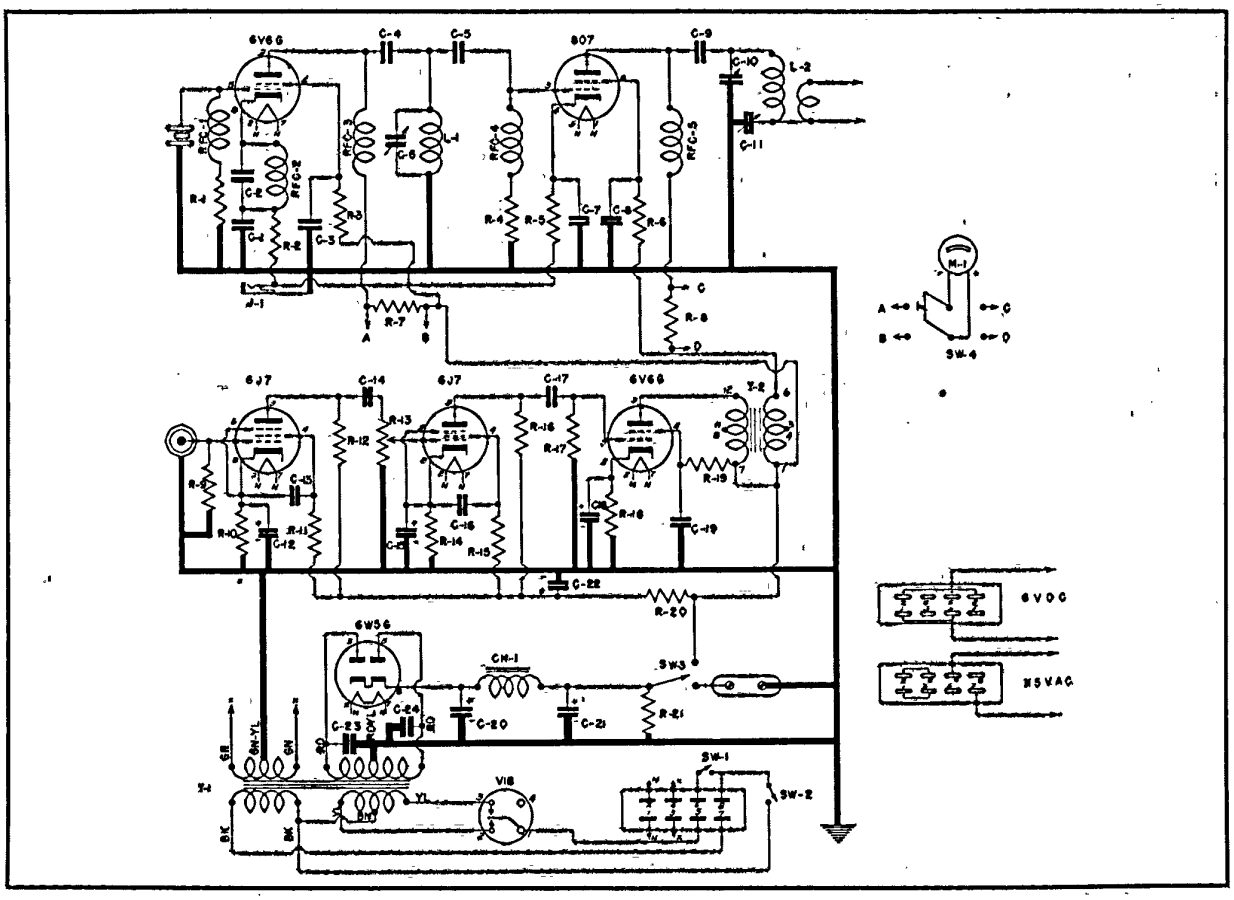

Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-14R40	Power Transformer
T-2	T-19M13	Modulation Transformer
CH-1	T-57C53	Filter Choke

Resistors:

R-1	20,000 Ohm 1 Watt Resistor
R-2	350 Ohm 10 Watt Resistor
R-3	15,000 Ohm 10 Watt Resistor
R-4	100,000 Ohm 1 Watt Resistor
R-5	300 Ohm 10 Watt Resistor
R-6	15,000 Ohm 10 Watt Resistor
R-7	50 Ohm 10 Watt Resistor
R-8	50 Ohm 10 Watt Resistor
R-9	5 Megohm ½ Watt Resistor
R-10	5,000 Ohm 1 Watt Resistor
R-11	3 Megohm ½ Watt Resistor
R-12	500,000 Ohm ½ Watt Resistor
R-13	1 Megohm Volume Control
R-14	5,000 Ohm 1 Watt Resistor
R-15	3 Megohm ½ Watt Resistor
R-16	500,000 Ohm ½ Watt Resistor
R-17	500,000 Ohm ½ Watt Resistor
R-18	300 Ohm 10 Watt Resistor
R-19	20,000 Ohm 1 Watt Resistor
R-20	20,000 Ohm 1 Watt Resistor
R-21	30,000 Ohm 20 Watt Resistor

Condensers:

C-1	.01 Mfd. 400 Volt Condenser
C-2	.0001 Mfd. 500 Volt Mica Condenser
C-3	.01 Mfd. 400 Volt Condenser
C-4	.002 Mfd. 1,000 Volt Mica Condenser
C-5	.0001 Mfd. 500 Volt Mica Condenser
C-6	100 Mmfd. Variable Condenser
C-7	.002 Mfd. 500 Volt Mica Condenser
C-8	.002 Mfd. 500 Volt Mica Condenser

Condensers: (Cont.)

C-9	.002 Mfd. 1,000 Volt Mica Condenser
C-10	100 Mmfd. Variable Condenser
C-11	100 Mmfd. Variable Condenser
C-12	10 Mfd. 25 Volt Electrolytic Condenser
C-13	.04 Mfd. 400 Volt Condenser
C-14	.04 Mfd. 400 Volt Condenser
C-15	10 Mfd. 25 Volt Electrolytic Condenser
C-16	.04 Mfd. 400 Volt Condenser
C-17	.04 Mfd. 400 Volt Condenser
C-18	10 Mfd. 25 Volt Electrolytic Condenser
C-19	.5 Mfd. 400 Volt Condenser
C-20	4 Mfd. 600 Volt Condenser
C-21, C-22	Double 8 Mfd. 450 Volt Condenser
C-23	.05 Mfd. 1,600 Volt Condenser
C-24	.05 Mfd. 1,600 Volt Condenser

RF Chokes:

RFC-1	RF Choke	RFC-4	RF Choke
RFC-2	RF Choke	RFC-5	RF Choke
RFC-3	RF Choke		

Miscellaneous Parts:

1	Chassis 10" x 14" x 3" (Punched and Drilled)
1	Panel (Punched and Drilled)
1	Cabinet
1	Vibrator Mounting Plate
3	Feed-thru Insulators
3	5-Contact Sockets
5	Octal Sockets
1	4-Contact Socket
1	5-Contact Socket
2	DPST Switches
1	SPDT Switch
1	DPDT Switch
1	Phone Jack, Circuit Closing

Miscellaneous Parts: (Cont.)

1	Plug
2	Sockets
1	Mic. Plug
1	Mic. Plug Shield
4	Knobs
1	Name Plate Marked "A.F. GAIN"
1	Name Plate Marked "CRYSTAL OSC. PLATE"
2	Name Plates Marked "POWER AMP. PLATE"
1	Name Plate Marked "SEND-RECEIVER"
1	Name Plate Marked "PLATE VOLTS"
1	Name Plate Marked "KEY"
1	Name Plate Marked "PLATE CURRENT"

Miscellaneous nuts, bolts, soldering lugs, lockwashers, grommets and other hardware.

Accessories:

1	Vibrator Mallory 825 or Equivalent
1	0-100 MA DC Meter 2" Square Case Triplett 227A or Equivalent
1	Crystal
1	6W5-G Tube
2	6V6-G Tubes
2	6J7 Tubes
1	807 or HY61/807 Tube
2	160 Meter RF Coils, End Linked, No Tap, Bud OEL-160, or Equivalent
2	80 Meter RF Coils, End Linked, No Tap, Bud OEL-80, or Equivalent
2	40 Meter RF Coils, End Linked, No Tap, Bud, OEL-40, or Equivalent
2	20 Meter RF Coils, End Linked, No Tap, Bud OEL-20, or Equivalent
2	10 Meter RF Coils, End Linked, No Tap, Bud OEL-10, or Equivalent

Complete kit of the above parts with large size circuit diagram available from your local Thordarson distributor. (Accessories not included in kit).

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

40 Watt Band-Switch Exciter

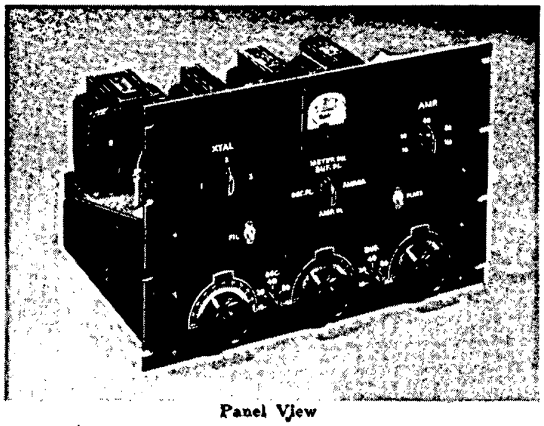

Panel View

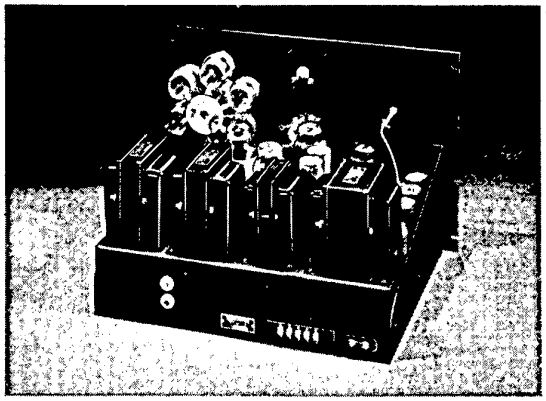

Chassis View

THIS 40 watt exciter operates on the five amateur bands from 160 to 10 meters, all bands being selected by switches on the panel. The operator has the choice of three crystal frequencies, which may provide operation on all bands or at slightly different points in the same band.

The exciter is a three-stage unit using a 6V6-G crystal oscillator, a 6L6-G buffer-doubler and an 807 final amplifier. The exciter is built on a 17" x 13" x 4" chassis, complete with its filament and high voltage power supplies. It is supplied with a specially prepared 19" x 12¼" panel designed to harmonize with the many high power units with which it may be associated. The panel is finished in black with white lettering opposite all switches and dials. No additional markings or lettering are necessary. The position of each coil switch is clearly shown. The chassis is equipped with a five-lug terminal board so that connections can be made for controlling high voltage power supplies and filament supplies for other units by means of the switches on this chassis.

Circuit Details

The 6V6-G crystal oscillator is of the regenerative type having an RF choke in its cathode circuit. The oscillator plate tank coil is a Barker and Williamson type 2AB, which may be tuned with one condenser to all five frequency bands. This tank coil is divided into five sections, and the switching is such that all five sections are used for 160 meters; and only one section for 10 meters. The shorting switch on this coil is such that not only are the unused portions of the coil shorted out, but the unused portion adjacent to the one in operation is independently and directly shorted out. This feature reduces the losses due to shorted turns.

The oscillator stage operates with a plate voltage of 350 volts and a screen voltage of 180 volts. When loaded by the buffer-doubler stage, the oscillator plate current is about 20 to 25 MA. For 10 meter operation best results are obtained by using a 20 meter crystal, although quadrupling from 40 meters may also be easily carried out in the buffer-doubler. The crystals are mounted on the chassis with very short leads to the grid circuit. Crystal switching is accomplished by means of a flexible shaft connected to the crystal switch on the panel. This allows the crystal to be well placed to avoid undesirable electrical effects and also permits the crystal switch to be placed in a position on the panel which makes operation most convenient.

The buffer-doubler stage uses a 6L6-G with a plate voltage of 400 V. and a screen voltage of 180 V. This stage also has for its plate tank coil a type 2AB coil which covers five bands with one condenser. When loaded down by the grid of the final stage, the buffer-doubler plate current is 35 to 40 MA. With excitation on any band from 160 to 20 meters the buffer-doubler stage very efficiently doubles. With excitation on 160, 80 and 40 meters, quadrupling may be accomplished in this stage. Although the 6L6-G is not neutralized, the amount of feedback is so low that the stage may be worked "straight through" on 160 meters.

The final amplifier stage uses an 807 and operates with 400 volts on the plate and 270 volts on the screen. A power input of 40 watts may be obtained under such conditions, and the power output is of the order of 25 watts. The excitation to this stage should be adjusted so that the grid current is 5 to 10 MA. Care should be taken not to overdrive this beam power tube, for in such a case the plate efficiency decreases. Usually more than enough excitation is obtainable, and the reduction of excitation to this stage may be accomplished by slightly detuning the buffer-doubler tank. The cathode bias on the buffer-doubler stage prevents the current from rising to abnormal values when detuning. The final plate coil is of turret type construction; and the turret has mounted upon it a coil for each of the five bands, each coil with its associated link. Provision is made for shorting out the four unused coils and their links. The final tank condenser is of the split-stator type with the rotor grounded. It was not found necessary to neutralize the final amplifier.

The power supply uses an 83 rectifier, and the power transformer is conservatively rated. Filament and plate supplies may be switched separately from the front of the panel. The switches are plainly marked on each panel.

The oscillator tank and buffer tank coils are mounted with their axes at right angles to each other to avoid any interaction. The final tank coil is mounted above the chassis, and no coupling exists from the final coil to any of the low power stages.

The power output is sufficient to excite Class C stages having inputs as high as 250 to 400 watts. A single meter on the panel and its associated switch provide current readings in the following circuits: crystal oscillator plate, buffer-doubler plate, final amplifier grid and final amplifier plate.

The chassis construction is so arranged as to provide for an increase in power output by changing to the circuit shown for the 120 watt band switching exciter. Knock-out holes are made for the addition of rectifier tube sockets, and extra holes are drilled in the chassis to accommodate the dual plate transformer and the T-19F77 filament transformer required because of the additional 866-JR filament load. Space is provided on the under side of the chassis for the mounting of the high voltage condensers used to filter the output of the 866-JR's.

40 Watt Band-Switch Exciter

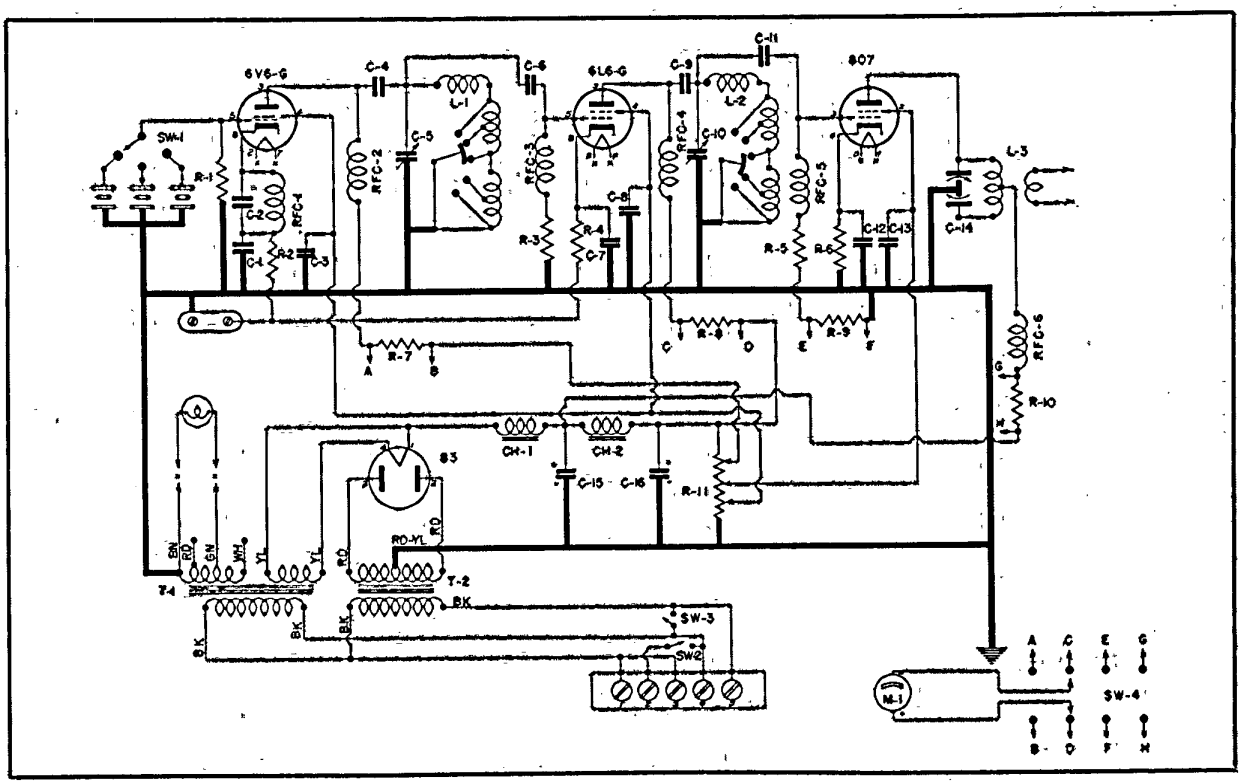

THORDARSON TRANSFORMERS and CHOKES

T-1	T-19F76	Filament Transformer
T-2	T-84P60	Plate Transformer
CH-1	T-75C51	Filter Choke
CH-2	T-75C51	Filter Choke

Resistors:

R-1	20,000 Ohm 1 Watt Resistor
R-2	350 Ohm 10 Watt Resistor
R-3	100,000 Ohm 1 Watt Resistor
R-4	350 Ohm 10 Watt Resistor
R-5	10,000 Ohm 10 Watt Resistor
R-6	350 Ohm 10 Watt Resistor
R-7	50 Ohm 10 Watt Resistor
R-8	50 Ohm 10 Watt Resistor
R-9	50 Ohm 10 Watt Resistor
R-10	50 Ohm 10 Watt Resistor
R-11	25,000 Ohm 50 Watt Semi-Variable Resistor, Ohmite or Equivalent

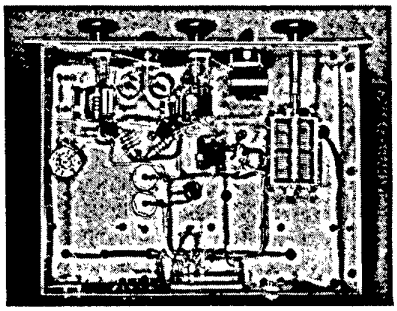

Bottom View

Parts Required

Condensers:

C-1	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-2	.0001 Mfd. 1000 Volt Mica Condenser, CD-4-6T1 or Aerovox 1455
C-3	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-4	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-5	100 Mmfd. Variable Condenser, Cardwell ZU-100-AS or Equivalent
C-6	.0001 Mfd. 1000 Volt Mica Condenser, CD-4-6T1 or Aerovox 1455
C-7	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-8	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-9	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-10	100 Mmfd. Variable Condenser, Cardwell ZU-100-AS or Equivalent
C-11	.0001 Mfd. 1000 Volt Mica Condenser, CD-4-6T1 or Aerovox 1455
C-12	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-13	.002 Mfd. 1000 Volt Mica Condenser, CD-4-6D2 or Aerovox 1455
C-14	260-260 Mfd. Variable Condenser, Cardwell MR-260-BD or Equivalent
C-15	8 Mfd. 600 Volt Electrolytic Condenser, Mallory HS-693 or Equivalent
C-16	8 Mfd. 600 Volt Electrolytic Condenser, Mallory HS-693 or Equivalent

Tubes:

1	6V6-G	Tube
1	6L6-G or 6L6 GX	Tube
1	807 or HY61/807	Tube
1	83	Tube

RF Chokes:

RFC-1	RF Choke, Millen #34101 or Equiv.
RFC-2	RF Choke, Millen #34101 or Equiv.
RFC-3	RF Choke, Millen #34100 or Equiv.
RFC-4	RF Choke, Millen #34101 or Equiv.
RFC-5	RF Choke, Millen #34100 or Equiv.
RFC-6	RF Choke, Millen #34100 or Equiv.

Miscellaneous Parts:

1		Punched Chassis 17" x 13" x 4"
1		Panel 19" x 12¼"
1 Pr.		Chassis Mounting Brackets
1		Condenser Mounting Bracket
2		Bushings
2		Octal Sockets
1		4-Contact Socket
1		5-Contact Socket, Steatite
2		Feed-thru Insulators
1		Grid Grip
3		Crystal Sockets, Millen #33002 or Equiv.
1	SW-1	Single Pole 4-Throw Switch, Isolantite, Centralab 2542 or Equivalent
1	SW-2	SPST Switch, Arrow H & H #20994
1	SW-3	SPST Switch, Arrow H & H #20994 or Equivalent
1	SW-4	2-Pole 4-Throw Switch, Isolantite, Centralab 2543 or Equivalent
1	L-1	Band Switch Coil, B-W Type 2AB or Equivalent
1	L-2	Band Switch Coil, B-W Type 2AB or Equivalent
1	L-3	Baby Turret, B-W Type BTCL
1	M-1	0-200 MA DC Meter, 3" Square Case, Rear Illumination, Triplett #327A or Equivalent
1		Grid Grip, National Type 24 or Equiv.
3		Control Wheels 2¼" Diameter, Coto CI-45 or Equivalent
5		Knobs, Crowe #588 or Equivalent
1		Tube Shield, Hammarlund Type PTS or Equivalent
1		Shaft Extension, Yaxley #RS-242
1		Panel Bearing Assembly, Johnson #256 or Equivalent
1		Shaft Coupling, National TX-11

Miscellaneous screws, nuts, bolts, lock-washers required hook-up wire and other hardware.

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

120 Watt Band-Switch Exciter

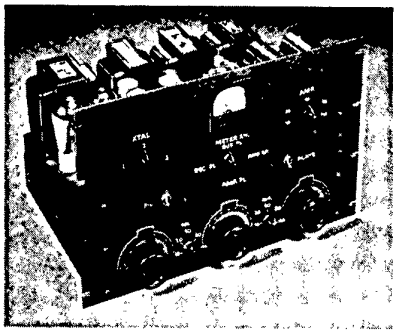

Panel View

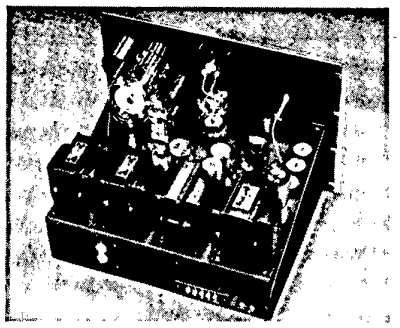

Chassis View

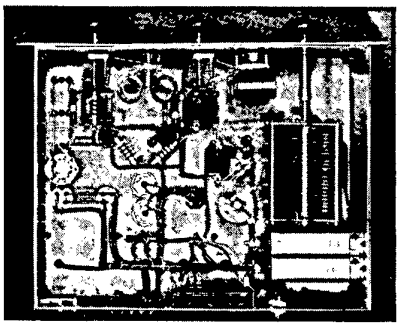

Bottom View

FOR transmitters having inputs as high as 700 or 800 watts this exciter provides adequate excitation on all bands from 160 to 10 meters without the necessity of plugging in different coils. Three crystal frequencies and five operating bands may be selected at will by means of controls on the panel.

The exciter uses for its final amplifier an 811 tube operating at a plate voltage of 1000 volts. The power input to the final stage is 120 watts, and power outputs of over 70 watts may be realized on all bands.

The panel is an especially designed unit requiring no additional name plates or markings. It is finished in black with white lettering, and the position of each control is clearly indicated.

The chassis and panel are the same as those used on the 40 watt band switching exciter. For converting the 40 watt unit to this 120 watt unit it is necessary only to replace the filament plate transformers, to add two filter condensers, a neutralizing condenser and a bleeder resistor; and to replace the final tank circuit with a larger unit. The same convenience of operation and attractive appearance will be retained by the amateur who wishes to increase the power output of his exciter without obsoleting the smaller equipment.

The crystal oscillator stage uses a 6V6-G tube operating with a plate voltage of 350V. and a screen-grid voltage of 190V. This stage drives a buffer-doubler stage with a 6L6-G tube operating at a plate voltage of 400V. and a screen-grid voltage of 275V. This buffer-doubler stage provides adequate excitation to the 811 grid on all bands.

The crystal oscillator stage operates with crystals in any band from 160 to 10 meters. When using crystals in the 160, 80 and 40 meter bands, doubling may be accomplished in the oscillator; and enough output is available from it to drive the 6L6-G buffer-doubler stage easily. When working "straight through" in the crystal oscillator stage, the plate current is of the order of 20 to 25 MA when loaded with the grid of the buffer-doubler stage. The buffer-doubler stage may be operated "straight through," or it may be used to double. With grid excitation on 160, 80, 40 and 20 meters, doubling is easily accomplished in this stage with enough power output to excite the 811 final stage easily. With excitation on 160, 80 and 40 meters, quadrupling can be carried on to give good outputs on 40, 20 and 10 meters.

Although the buffer-doubler stage is not neutralized, no difficulties will be encountered when operating "straight through." However, for best results, it is recommended that wherever possible frequency multiplication be accomplished in this stage.

The oscillator and buffer-doubler plate tank coils are sectionalized and mounted on a switch so that the amount of the coil being used can be easily controlled from the panel. It is thus possible to tune to all five bands with a single condenser. These tank coils are of the type in which the unused winding is short circuited.

The buffer-doubler stage is capacity coupled to the 811 grid. At resonance, and when loaded by the final grid, the plate current in the buffer-doubler stage is of the order of 55 to 60 MA.

The final tank circuit consists of a split-stator condenser and a Barker-Williamson type BCL turret assembly. This coil assembly consists of five coils, one for each frequency band. The coil which is desired may be selected from the panel, and the other four coils with their links shorted out.

The 811 tube is neutralized in a conventional manner, and no difficulty is encountered in obtaining perfect neutralization.

Since it is a high mu tube, the 811 requires no bias to protect it in the event of failure of excitation. In this exciter grid leak bias is used. With proper excitation the grid current should be 30 to 35 MA.

Two DC power supplies are mounted upon this chassis, one delivering 400 volts to supply the oscillator and buffer-doubler stages and the other delivering 1000 volts to the 811 tube. The low voltage rectifier uses a 5Z3 tube, and the high voltage rectifier uses two 866-JR tubes. These power supplies are filtered with the same chokes.

Filament supplies for the RF tubes and for the rectifier tubes are controlled by a single switch on the panel, and the two high voltage supplies by another switch. The terminal board on the rear of the chassis has three extra terminals so that other units associated with this exciter may be controlled by the exciter switches.

A single meter is mounted upon the panel, and under it a four-position switch permits the reading of the oscillator plate current, the buffer-doubler plate current, the final amplifier grid current and the final amplifier plate current.

The three crystal sockets are mounted on the chassis base. The selector switch is coupled to the panel switch by means of a flexible shaft, thus permitting the crystals to be located for best performance and retaining a convenient switch position on the panel.

120 Watt Band-Switch Exciter

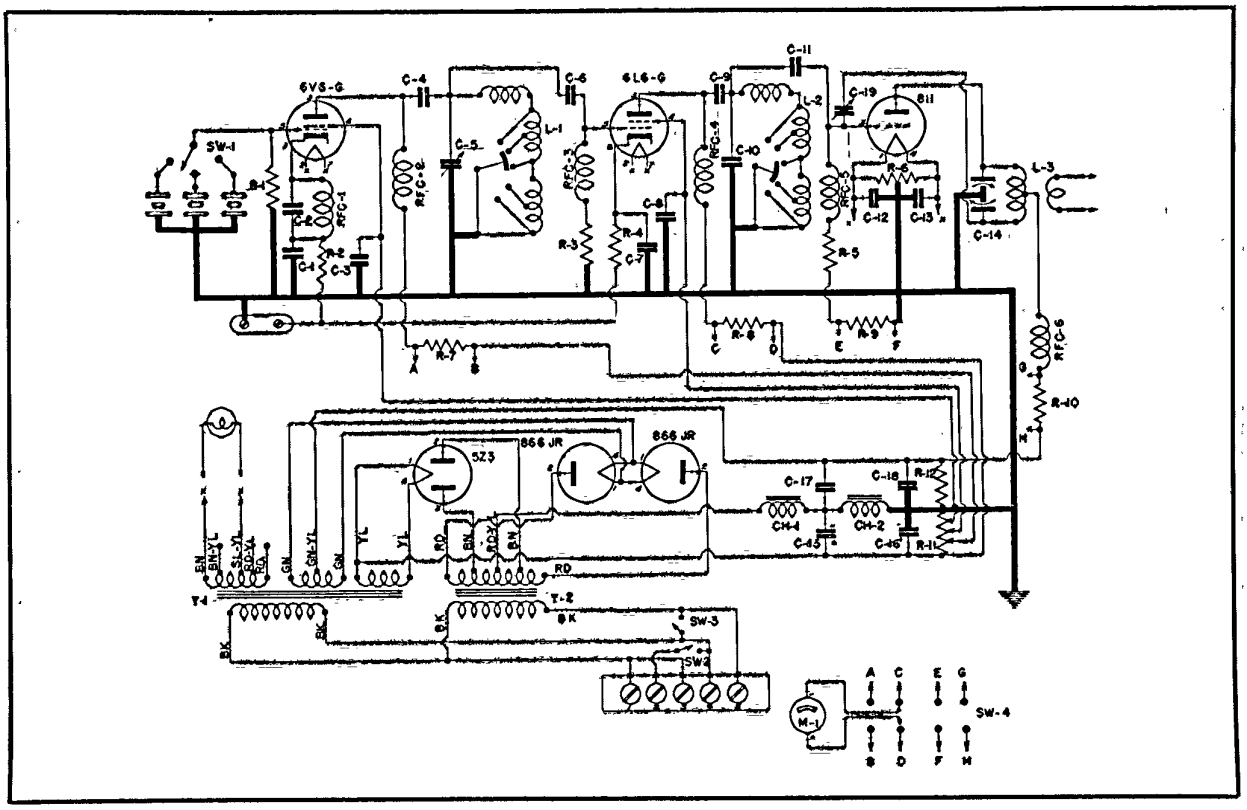

Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-19F77	Filament Transformer
T-2	T-19P57	Plate Transformer
CH-1	T-75C51	Filter Choke
CH-2	T-75C51	Filter Choke

Resistors:

R-1	20,000 Ohm 1 Watt Resistor
R-2	350 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-3	100,000 Ohm 1 Watt Resistor
R-4	350 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-5	2,500 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-6	20 Ohm 10 Watt Center Tapped Resistor, Ohmite Brown Devil or Equivalent
R-7	50 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-8	50 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-9	50 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-10	50 Ohm 10 Watt Resistor, Ohmite Brown Devil or Equivalent
R-11	25,000 Ohm 50 Watt Semi-Variable Resistor, Ohmite #0585 or Equivalent
R-12	100,000 Ohm 50 Watt Resistor, Ohmite or Equivalent

Condensers:

C-1	.002 Mfd. 1,000 Volt Mica Condenser C-D 4-6D2 or Aerovox 1455
C-2	.0001 Mfd. 1,000 Volt Mica Condenser, C-D 4-6T1 or Aerovox 1455
C-3	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-4	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-5	100 Mmfd. Variable Condenser, Cardwell ZU-100-AS or Equivalent

Condensers: (Cont.)

C-6	.0001 Mfd. 1,000 Volt Mica Condenser, C-D 4-6T1 or Aerovox 1455
C-7	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-8	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-9	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-10	100 Mmfd. Variable Condenser, Cardwell ZU-100-AS or Equivalent
C-11	.0001 Mfd. 1,000 Volt Mica Condenser, C-D 4-6T1 or Aerovox 1455
C-12	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-13	.002 Mfd. 1,000 Volt Mica Condenser, C-D 4-6D2 or Aerovox 1455
C-14	210-210 Mmfd. Variable Condenser, Cardwell XT-210-PD or Equivalent
C-15	8 Mfd. 600 Volt Electrolytic Condenser, Mallory HS-693 or Equivalent
C-16	8 Mfd. 600 Volt Electrolytic Condenser, Mallory HS-693 or Equivalent
C-17	2 Mfd. 1,500 Volt Condenser, Mallory TX-808 or Equivalent
C-18	2 Mfd. 1,500 Volt Condenser, Mallory TX-808 or Equivalent
C-19	Neutralizing Condenser, E. F. Johnson #13G45 or Equivalent

Tubes:

1	6V6-G	Tube	1	811	Tube
1	6L6-G or 6L6GX	Tube	1	5Z3	Tube
			2	866-Jr.	Tubes

RF Chokes:

RFC-1	RF Choke, Millen #34101 or Equiv.	
RFC-2	RF Choke, Millen #34101 or Equiv.	
RFC-3	RF Choke, Millen #34101 or Equiv.	
RFC-4	RF Choke, Millen #34101 or Equiv.	
RFC-5	RF Choke, Millen #34101 or Equiv.	
RFC-6	RF Choke, Millen #34101 or Equiv.	

Miscellaneous Parts:

1		Punched Chassis 17" x 13" x 4"
1		Panel 19" x 12¼"
1	Pr.	Chassis Mounting Brackets
1		Condenser Mounting Bracket
2		Bushings
2		Octal Sockets
1		4-Contact Socket
3		4-Contact Sockets, Steatite
2		Feed-thru Insulators
1		Grid Grip
3		Crystal Sockets, Millen #33002 or Equiv.
1	SW-1	Single-Pole, 4-Throw Switch, Isolantite, Centralab #2543 or Equivalent
1	SW-2	SPST Switch, Arrow H & H #20992 (Nickel Plated) or Equivalent
1	SW-3	SPST Switch, Arrow H & H #20992 (Nickel Plated) or Equivalent
1	SW-4	2-Pole, 4-Throw Switch, Isolantite, Centralab #2543 or Equivalent
1	L-1	Band Switch Coil, Barker-Williamson Type 2AB or Equivalent
1	L-2	Band Switch Coil, Barker-Williamson Type 2AB or Equivalent
1	L-3	Coil Turret Assembly, Barker-Williamson Type BCL or Equivalent
1	M-1	0-200 MA DC Meter, 2" Square Case, Rear Illumination, Triplett #327-A or Equivalent
3		Control Wheels, 2¼" Diameter, Coto CI-45 or Equivalent
5		Knobs, Crowe #588 or Equivalent
1		Shaft Extension, Yaxley #RS-242 or Equivalent
1		Panel Bearing Assembly, Johnson #256 or Equivalent
1		Shaft Coupling, National TX-11

Miscellaneous nuts, bolts, soldering lugs, lockwashers, varnished tubing, cable and other hardware.

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

Band-Switch Transmitter

100 WATT MULTI-BAND

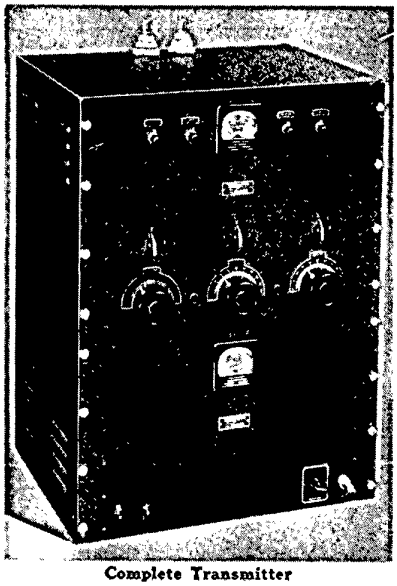

Complete Transmitter

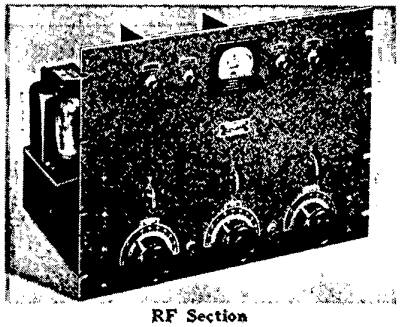

RF Section

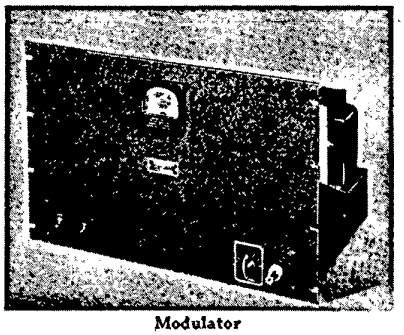

Modulator

THIS complete 100 watt transmitter consists of two units, each having its own power supply. The RF section may be modulated or may be used for CW only. Its final stage operates at 1000 volts with 100 watts input. The modulator provides sufficient power output to modulate 100% the RF section, and the speech amplifier is incorporated in the modulator chassis.

Any three pre-selected amateur bands in the range from 160 to 10 meters may be selected with panel switches.

The RF section is a three-stage circuit using a 6L6-G oscillator, a 6L6-G buffer-doubler stage and a TZ-40 final stage.

The oscillator stage has provision for switching in its plate tank circuit any one of three coils, and the same switching operation which selects the coils also selects the proper crystal. With 160 and 80 meter crystals, doubling can be accomplished in the oscillator stage, but crystals in the range from 160 to 20 meters may be used in the oscillator stage when working "straight through."

In the buffer stage provision is made for switching to any one of three tank coils. Because the 6L6-G buffer-doubler tube is not neutralized and since, when the second stage is used in frequency multiplying service, adequate drive is obtained on the TZ-40, it is recommended that doubling be carried on in this stage whenever possible. However, on the lower frequency bands, there is no tendency toward trouble when operating "straight through." In all cases the final stage is operated "straight through." For 10 meter output it is recommended that a 20 meter crystal be used and that doubling be carried on in the second stage.

The oscillator stage is capacity coupled to the buffer-doubler stage, and the latter is capacity coupled to the final grid.

Three Barker-Williamson center linked, center tapped tank coils, mounted in a type B coil turret, permit the selection of any one of these coils for use in the final tank. With this arrangement the link around the coil in use is connected to the antenna or to an antenna matching network.

With one meter and four meter switches provision is made for reading the oscillator cathode current, the buffer-doubler cathode current, the final grid current and the final plate current. The meter switches are of such a type that the circuit controlled by each switch may be opened by placing the switch in its "half way" position.

Two direct current supplies are installed in this chassis, one of which delivers approximately 400 volts to supply the plates of the 6L6-G's and the other which delivers 1000 volts to supply the plate of the TZ-40. The screen supply for the 6L6-G's is taken from taps on the 400 volt bleeder R-5, these taps being adjusted so that the voltage on the oscillator screen-grid is about 150 to 200 volts and on the buffer-doubler screen-grid it is about 200 to 250 volts. When the oscillator tube is operating properly, the cathode current should dip to a value of 50 MA or less, and the cathode current in the buffer-doubler stage at resonance, should be about 75 MA. The grid current on the final should be 25 MA or more; and for a 100 watt input to the final stage, the TZ-40 plate current should be 100 MA.

The removal of the high voltage for neutralizing the final stage may be done easily by removing the 866-JR tubes from their sockets and then making the neutralizing adjustment in the conventional manner with the antenna or antenna matching network connected to the link on the final tank coil.

For CW operation the key is connected between terminals 1 and 2 on the five-screw terminal board on the back apron of the chassis, the 115 volt line is connected to terminals 3 and 4 and the plate voltage is controlled by a switch connected between terminals 4 and 5. The terminals of the two No. 55 feed-thru insulators on the rear apron of the chassis are connected together.

Modulator Unit:

The modulator tubes are 6L6-G's in push-pull, Class AB_1. These tubes are connected to the Class C load through a Multi-Match modulation transformer. The connections to the modulation transformer are as follows: One 6L6-G plate is connected to terminal 1, and the other plate to 6. Terminals 2 and 5 are joined and connected to the plate supply. Terminals 9 and 10 are also joined, but no connection is made to them. The Class C load is connected to terminals 8 and 12.

The speech amplifier tube line-up is as follows: a pentode connected 6J7, a 6F5 and a 6F6, triode connected.

The power supply uses an 83 to supply high voltage to all tubes and an 82 in the bias supply for the 6L6-G's.

In preparing the modulator unit for operation, an adjustment must be made of the bias and the screen voltage on the 6L6-G's. For obtaining the correct bias adjust R-11 until the voltage across it is 25 volts. Then adjust R-12 until the screen voltage is 310 volts. It may be necessary to readjust R-11 to maintain the 25 volts of bias. The modulator plate current should be about 115 MA for two tubes, and with a sine wave signal of sufficient magnitude to modulate 100% the RF section the plate current will rise to approximately 225 MA. For speech waves having the same peak power plate current will kick up to about 170 MA.

To connect the modulator to the RF section terminals 3, 4 and 5 on the RF

Band-Switch Transmitter

100 WATT MULTI-BAND

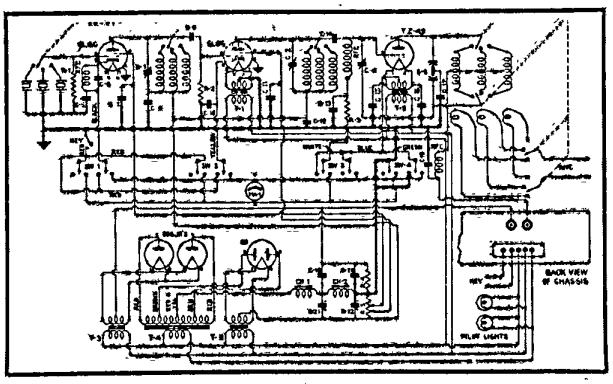

RF Unit

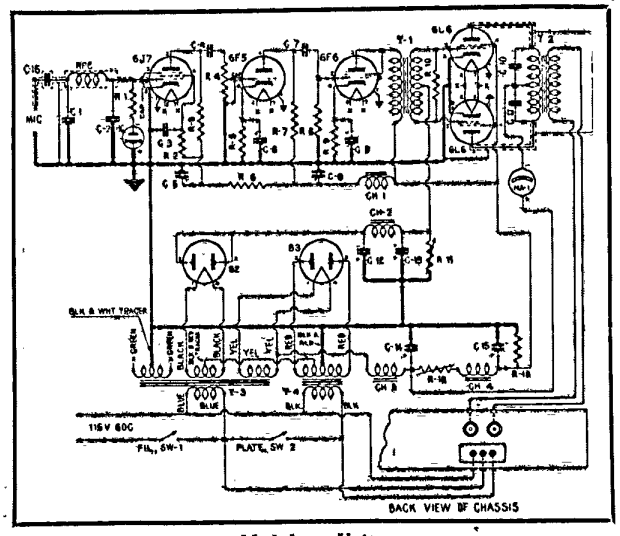

Modulator Unit

section should be connected to terminals 1, 2 and 3 on the modulator. Connection should be made from the terminals of the No. 55 feed-thru insulators on the modulator chassis to the corresponding insulators on the RF chassis. With the two chassis so interconnected the filament switch on the modulator chassis controls all the filaments, and the plate switch controls all plate supplies.

The RF section may be used alone as an exciter for transmitters having power inputs of almost one kilowatt.

BAND	TURNS	WINDING LENGTH
160	40	Close wound
80	22	Close wound
40	12	1½"
20	6	1½"
10	¾	

Osc. & Buf. coils are identical. Use No. 18E wire on 1½" Diam. form.

RF Unit

Parts Required

THORDARSON PARTS

1	T-17K21	Foundation Unit
T-1	T-19F97	Filament Transformer
T-2	T-19F93	Filament Transformer
T-3	T-19F88	Filament Transformer
T-4	T-19P57	Plate Transformer
T-5	T-19F91	Filament Transformer
CH-1	T-75C51	First Choke
CH-2	T-75C51	Second Choke

Tubes:

2	6L6-G or 6L6-GX Tubes	2	866-JR Tubes
1	TZ-40 Tube	1	83 Tube

Resistors:

R-1	50,000 Ohm 1 Watt Resistor, IRC BT-1
R-2	50,000 Ohm 10 Watt, Ohmite Red Devil
R-3	2,500 Ohm 25 Watt, Ohmite, Wirewound
R-4	100,000 Ohm 50 Watt, Ohmite Wirewound
R-5	20,000 Ohm 50 Watt, Ohmite Semi-Variable

Condensers:

C-1, C-2	Variable Condenser, National TMS-250
C-3	Variable Condenser, National TMC-200D
C-4	Neutralizing Condenser, Johnson 13G45
C-5, C-7, C-8, C-9, C-10, C-11, C-13, C-14, C-15, C-16	.001 Mfd. 1000 Volt Mica Condenser, Aerovox #1455 or C-D 4-6D1
C-6	.0001 Mfd. 1000 Volt Mica Condenser, Aerovox #1455 or C-D 4-6T1
C-12	.005 Mfd. 1000 Volt Mica Condenser, Aerovox #1455 or C-D 4-6D5
C-17, C-18	.001 Mfd. 5000 Volt Mica Condenser, Aerovox #1457 or C-D 4-25D1
C-19, C-20	2 Mfd. 1500 Volt Oil Filled Condenser Aerovox #1505 (2" Can)
C-21	4 Mfd. 600 V. Electrolytic, Aerovox GL-600
C-22	4 Mfd. 600 V. Electrolytic, Aerovox GL-600

Miscellaneous Parts:

3	5-Contact Sockets, Amphenol S5
5	4-Contact Sockets, Amphenol S4
2	Octal Sockets, Amphenol S8
5	4-Contact Isolantite Sockets, Amphenol SS4
8	Feed-thru Insulators, Johnson #55
4	Feed-thru Insulators, Johnson #42
3	RF Chokes, National R-100
1	4" Shaft Extension, Yaxley #RS243
1	2-Gang Band Switch, Centralab #2543
1	1-Gang Band Switch, Centralab #2542
1	Coil Turret, Barker-Williamson Model "B"
1	160 Meter Coil, Barker-Williamson 160BL — Center Linked
1	80 Meter Coil, B-W 80BL, Center Linked
1	40 Meter Coil, B-W 40BL, Center Linked
1	20 Meter Coil, B-W 20BL, Center Linked
1	10 Meter Coil, B-W 10BL, Center Linked
3	2¼" Coto-Coil Wheels CI-45 With Indicator Plates CI-47 Marked "OSC. PLATE," "BUFFER PLATE," "PWR. AMP. PLATE."
4	Indicator Plates, Marked "OSC. PLATE," "BUFFER PLATE," "PWR. AMP. PLATE," "PWR. AMP. GRID," Coto-Coil CI-47.
4	Meter Switches, Yaxley #762
1	0-200 MA Meter, Simpson #27S or Triplett #327-A (Illum.)
3	1¼" Bar Knobs, Black
1	Grid Cap, Large, National Type 12
2	SPST 6 Ampere Toggle Switches, H & H #26993
6	Coil Forms, National XR-4
1	Cone Insulator, Johnson #601
1	Cabinet, Bud #697 or Par Metal #SC2613
1	Variable Resistor Lug, Ohmite #0358

Modulator Unit

Parts Required

THORDARSON PARTS

1	T-17K22	Foundation Unit
T-1	T-67D78	Driver Transformer
T-2	T-11M75	CHT Modulation Transformer
T-3	T-79F84	Filament Transformer
T-4	T-84P60	Plate Transformer
CH-1	T-74C30	Third Choke
CH-2	T-75C49	Bias Choke
CH-3	T-75C51	First Choke
CH-4	T-68C07	Second Choke

Modulator Unit

Tubes:

1	6J7 Tube	2	6L6-G or 6L6-GX Tubes
1	6F5 Tube	1	82 Tube
1	6F6 Tube	1	83 Tube

Resistors:

R-1	5 Megohm ½ Watt Resistor, IRC BT-½
R-2	3 Megohm 1 Watt Resistor, IRC BT-1
R-3, R-8	250,000 Ohm 1 Watt Resistor, IRC BT-1
R-4	500,000 Ohm Volume Control, IRC 15-133
R-5	2000 Ohm 1 Watt Resistor, IRC BT-1
R-6	20,000 Ohm 1 Watt Resistor, IRC BT-1
R-7	100,000 Ohm 1 Watt Resistor, IRC BT-1
R-9	750 Ohm 10 Watt Resistor, IRC Type AB
R-10	10,000 Ohm 2 Watt Resistor, IRC BT-2
R-11	1500 Ohm 25 Watt Semi-Variable, Ohmite
R-12	2500 Ohm 25 Watt Semi-Variable, Ohmite
R-13	25,000 Ohm 50 Watt Wirewound, Ohmite

Condensers:

C-1, C-2	.0001 Mfd. 500 Volt Mica Condenser, Aerovox #1467 or C-D 5W-5T1
C-3	.04 Mfd. 400 Volt Paper Condenser, Aerovox #484 or C-D DT-4S4
C-4, C-7	.1 Mfd. 400 Volt Paper Condenser, Aerovox #484 or C-D DT-4P1
C-5	8 Mfd. 450 Volt Electrolytic Condenser, Aerovox PBS-450 or C-D JR508
C-6	10 Mfd. 25 Volt Electrolytic Condenser, Aerovox PR-25 or C-D ED-2100
C-8, C-15	8-8 Mfd. 450 V. Dual Elect., Aerovox 2G
C-9	10 Mfd. 50 V. Elect., Aerovox PR-50
C-10, C-11	0.002 Mfd. 1000 Volt Mica Condenser Aerovox #1455 or C-D 4-6D2
C-12, C-13	8 Mfd. 200 Volt Electrolytic Condenser, Aerovox PBS-200 or C-D JR208
C-14	8 Mfd. 600 V. Elect., Aerovox GL-600
C-16	0.01 Mfd. 400 Volt Paper Condenser, Aerovox #484 or C-D DT-4S1

Miscellaneous Parts:

1	RF Choke, National R-100
1	Mic. Connector, Amphenol MC-1F
1	Mic. Connector, Amphenol PC-1M
1	Bias Cell, Mallory #F7
1	Bias Cell Holder, Mallory #GB-1A
1	1¼" Bar Knob, Black Streamlined
1	AC Line Cord and Plug, Belden #1725
5	Octal Sockets, Amphenol S8
2	4-Contact Sockets, Amphenol S4
2	Metal Tube Grid Caps
1	Dial Plate, Crowe #566
2	Feed-thru Insulators, Johnson #55
1	0-300 MA Meter, Simpson #27S or Triplett #327-A (Illuminated)
2	Metal Tube Shields, ARHCO #92
1	Red Jewel and Candelabra Bracket, ARHCO #93 or Drake Mfg. Co. #10C
1	Green Jewel and Candelabra Bracket, ARHCO #93 or Drake Mfg. Co. #10C
2	110 Volt Carbon Lamps Type G6

Complete Instruction Book SD-386-A giving full details of building data, photos, diagrams and layout available at 25 cents postpaid.

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

Amateur Speech Amplifier

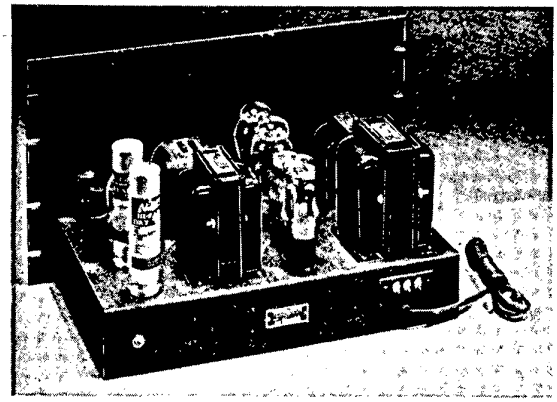

Chassis View

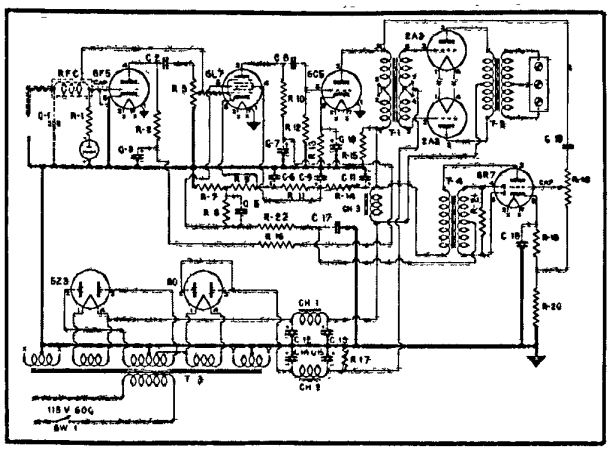

USING low plate resistance output tubes, this amplifier is capable of easily delivering 10 watts of audio power for driving the largest modulators used by amateurs. Its low internal output impedance provides the excellent regulation required in Class B driver service, and its high gain makes it usable with crystal microphones.

The circuit shown is that incorporating the peak limiting feature, but this amplifier is also available with a circuit for overmodulation control or as a conventional amplifier. The punched chassis is designed to fit either the regular type amateur transformers or the C.H.T. Series of transformers, which give better frequency response and less distortion. The amplifier may be adapted to rack and panel mounting, or a cover may be obtained for use on an operating table.

For T-2, a driver transformer may be used to couple the 2A3 plates directly to the Class B grids; or, if it is desired to locate the amplifier remotely from the modulator, an output transformer may be installed to couple the 2A3 plates to a 500 ohm line.

Specifications showing the different circuits, together with a complete parts list, are shown on the Thordarson SD-389 bulletin, available at all jobbers.

Thordarson Parts

1	T-17K20 Foundation Unit
T-1	T-15A74
T-2	T-15S90 or T-67S54 for 500 ohm output or T-15D76, T-15D77, T-15D78 or T-15D79 or T-19D01, T-19D02, T-19D03 or T-19D04
T-3	T-15R05 or T-87R85
T-4	T-78D46
CH-1	T-15C54 or T-74C29
CH-2	T-75C49
CH-3	T-74C30

Tubes:

1—6F5 1—6C5 1—5Z3 1—6R7 1—6L7 2—2A3 1—80

Resistors:

R-1	5 Megohm, ½ Watt, IRC BT-½
R-2	250,000 Ohms, 1 Watt, IRC BT-1
R-3	500,000 Ohms, Volume Control, IRC 13-133
R-7	350 Ohms, 10 Watts, Ohmite Brown Devil
R-8	500,000 Ohms 1 Watt, IRC BT-1
R-9	150 Ohms, 10 Watts, Ohmite Brown Devil
R-10	100,000 Ohms, 1 Watt, IRC BT-1
R-11	4,000 Ohms 10 Watts, Ohmite Brown Devil
R-12	250,000 Ohms 1 Watt, IRC BT-1
R-13	500 Ohms, 1 Watt, IRC BT-1
R-14	12,000 Ohms, 25 Watts, Ohmite Semi-Variable
R-15	20,000 Ohms, 1 Watt, IRC BT-1
R-16	20,000 Ohms, 1 Watt, IRC BT-1
R-17	2,500 Ohms, 25 Watts, Ohmite Semi-Variable
R-18	500,000 Ohms, Volume Control, IRC 13-133
R-19	1,000 Ohms, 1 Watt, IRC BT-1
R-20	2,500 Ohms, 1 Watt, IRC BT-1
R-21	10,000 Ohms, 1 Watt, IRC BT-1
R-22	100,000 Ohms, 1 Watt, IRC BT-1

Condensers:

C-1	0.0001 Mfd., 500 V Mica Aerovox 1467 or C-D 5W-5T1
C-2	0.1 Mfd., 400 V Paper Aerovox 484 or C-D DT-4P1
C-3	8 Mfd., 450 V Elect. Aerovox PBS-450 or C-D JR508
C-5	0.5 Mfd., 400 V Paper Aerovox 484 or C-D DT-4P5
C-6	8 Mfd., 450 V Elect. Aerovox PBS-450 or C-D JR508
C-7, C-11	8-8 Mfd., 450 V Dual Elect. Aerovox 2G
C-8	0.1 Mfd., 400 V Paper Aerovox 484 or C-D DT-4P1
C-9	8 Mfd., 450 V Elect. Aerovox PBS-450 or C-D JR508
C-10	10 Mfd., 25 V Elect. Aerovox PR-25 or C-D ED-2100
C-12, C-13	8-8 Mfd., 450 V Dual Elect. Aerovox 2G
C-14	8 Mfd., 200 V Elect. Aerovox PBS-200 or C-D JR208
C-15	8 Mfd., 200 V Elect. Aerovox PBS-200 or C-D JR208
C-17	0.1 Mfd., 400 V Paper Aerovox 484 or C-D DT-4P1
C-18	10 Mfd., 25 V Elect. Aerovox PB-25 or C-D ED-2100
C-19	0.1 Mfd., 400 V Paper Aerovox 484 or C-D DT-4P1

Miscellaneous Parts:

1	Mic. Input Connector, Amphenol MC1F
1	Mic. Input Connector, Amphenol PC1M
1	Red Jewe and Bracket, Yaxley No. 310R
1	Bias Cell, Mallory No. F7
1	Bias Cell Holder, Mallory No. GB-1A
1	1¼" Bar Knob, Black Streamlined
1	SPST Toggle Switch, H & H No. 20992
1	AC Line Cord and Plug, Belden No. 1725
3	Metal Tube Grid Caps
2	Metal Tube Shields, ARHCO No. 92
1	Dial Plate, Crowe No. 566
1	RF Choke, National R-100
4	Octal Sockets, Amphenol 8S
4	4-Contact Sockets, Amphenol S-4
1	6.3 Volt Pilot Light, Mazda No. 40

The parts list shown is for the amplifier with either the over-modulation control or the peak limiting circuits; complete drawings, photos, parts lists and instructions for easy assembly of either of the above circuits are contained in Instruction Book SD-387, 15 cents postpaid.

250 Watt Phone Transmitter

450 WATT CW — 160 TO 10 METERS

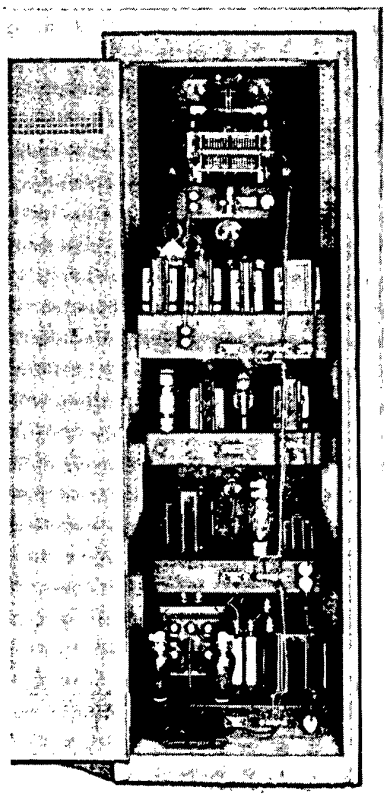

High Efficiency Final Stage

★

Multi-Match Modulator

★

1250 and 1500 Volt Power Supply

★

Up to 150 Watts Modulator Output

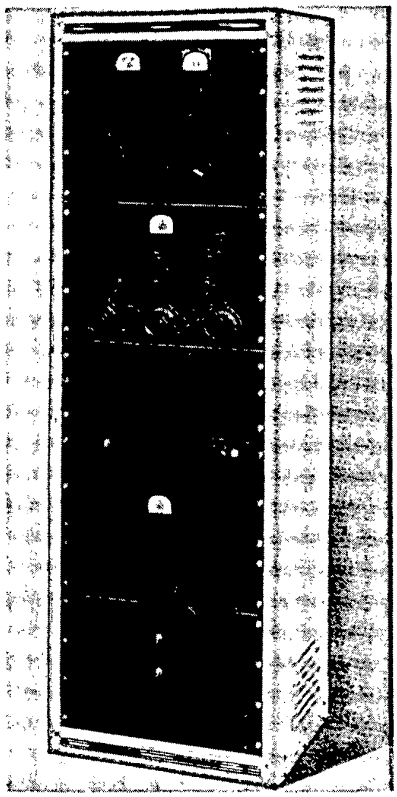

PARTICULARLY designed for use with the new RCA-811 and 812 tubes, this transmitter, with its unusual mechanical layout and carefully planned wiring, gives superior performance on the five amateur bands from 160 to 10 meters. With an input of 250 watts for phone operation, a carrier output of 190 watts is easily obtained; and with 450 watts input for CW, 350 watts may be delivered to the antenna. Higher than usual plate efficiencies are obtained by careful attention to mechanical layout and by the selection of high quality parts.

In addition to the RCA-812 the transmitter will also operate satisfactorily with other tubes such as the Taylor TZ-40, Taylor T-55, or the Eimac 35T. It is only necessary to use the correct filament transformer and to adjust the grid bias resistor.

A semi-fixed swinging link grid tank coil of the plug-in type is used in the grid circuit. This allows not only close adjustment for optimum excitation but also permits the coil to be removed without changing the link setting. This latter feature is particularly desirable for the amateur who wishes to avoid time-consuming operations when changing bands. The plate tank coil is also of the swinging link type, which permits quick adjustment of the amplifier loading. The Class C amplifier is easily driven by the Thordarson 40 watt Band-Switch Exciter unit, this combination affording the advantage of quick band changing without involving costly coil switching parts in the high power stage.

The Class C amplifier requires 200 MA at 1250 volts for a phone input of 250 watts. For a 450 watt CW input the plate current is 300 MA at 1500 volts. The grid current for the Class C tubes depends upon the choice of tubes and whether CW or phone operation is desired. For 812's it is 50 MA for two tubes. To meet the various bias requirements of the different tube types, an adjustable grid resistor is provided.

Should the amateur wish to install an external fixed bias supply for CW, provision has been made for its easy connection. If external bias is used, the negative of the bias supply connects to terminal No. 1 and the positive to No. 2. If external bias is not desired terminals No. 1 and No. 2 on the Class C amplifier chassis are connected together. About 30 volts of fixed bias are required to maintain the tubes within their rated plate dissipation without excitation.

Both the grid and the plate currents are metered, the meters being in the cathode return leads. This places both meters at a low DC potential with respect to the chassis, thus eliminating any tendency toward deflection of the needle due to electrostatic effects and removing the possibility of flash-over from the meter terminals to the pilot lamp mounting.

The modulator uses the new 811 tubes and easily delivers the required 125 watts of audio frequency power with very little distortion. It is designed to operate from a "500 ohm" line. The modulation transformer is of the Multi-Match type so that it may be used to modulate any Class C stage of 300 watts input power. The no-signal plate current of the 811's is 60 MA, and the current with a 125 watt sine wave output is 177 MA. For speech signals having the same peak power the plate current should swing to about 90 or 100 MA.

The required driving power is very small, being on the order of 4 peak

250 Watt Phone Transmitter

450 WATT CW — 160 TO 10 METERS

watts. If 2A3's are used as the driver tubes, an unusually high step-down ratio from the plates of the 2A3's to the grids of the 811's may be used to obtain excellent driving regulation. The Thordarson Amateur Speech Amplifier is an excellent unit to furnish the driving power required by this modulator.

The power supply, with its tapped plate transformer, is rated at 300 MA at 1250 or 1500 volts. The load requirements of the Class C amplifier and the modulator are such that the power supply is fully loaded for both phone and CW so that regardless of the type of operation the amateur chooses, he is not investing in a power supply which is not being loaded up to its rating at all times. The power supply is entirely self-contained with separate plate and filament switches, making it an ideal power supply for other equipment of similar load requirements.

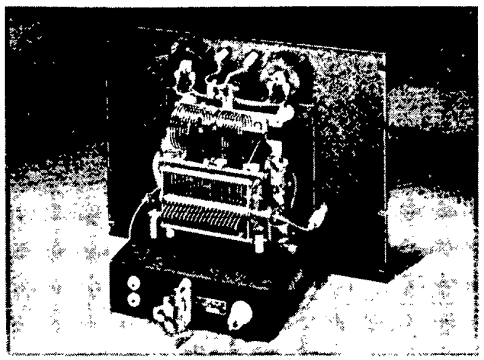

RF Chassis View

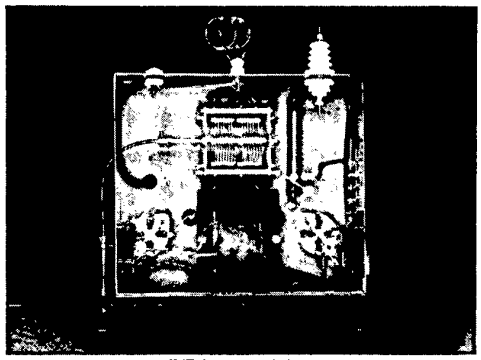

RF Bottom View

RF Section

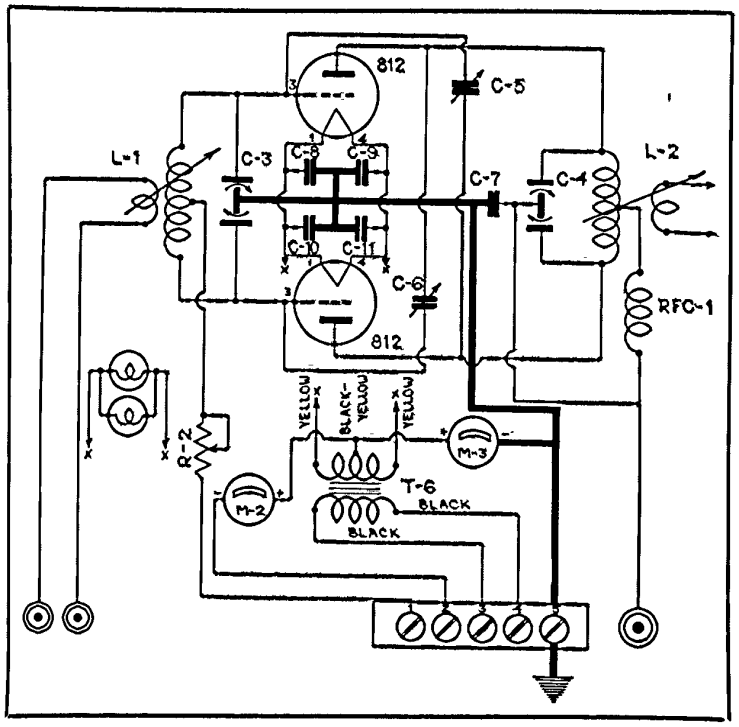

Parts Required

THORDARSON TRANSFORMER

T-6	T-19F85	Filament Transformer

Resistor:

R-2	4,000 Ohm 50 Watt Wirewound Ohmite Semi-Variable or Equivalent	

Condensers:

C-3	Variable Air Condenser, Cardwell MR-150-BD or Equivalent	
C-4	Variable Air Condenser, Cardwell XP-165-KD or Equivalent	
C-5	Neutralizing Condenser, Hammarlund N-10 or Equivalent	
C-6	Neutralizing Condenser, Hammarlund N-10 or Equivalent	
C-7	.001 Mfd. 3,500 Volt Mica Condenser Aerovox 1653 or Equivalent	
C-8	.002 Mfd. 1,000 Volt Mica Condenser CD-4-6D2 or Aerovox 1455	
C-9	.002 Mfd. 1,000 Volt Mica Condenser CD-4-6D2 or Aerovox 1455	
C-10	.002 Mfd. 1,000 Volt Mica Condenser CD-4-6D2 or Aerovox 1455	
C-11	.002 Mfd. 1,000 Volt Mica Condenser CD-4-6D2 or Aerovox 1455	

Tubes:

2	812 Tubes

Miscellaneous Parts:

1		Punched Chassis 8¾" x 10" x 3"
1		Panel 19" x 14"
1		Sub-Panel
1		Terminal Board
4		Bushings
3		Feed-thru Insulators
2		4-Contact Isolantite Sockets
2		Stand-off Insulators
2		Shaft Couplings, National TX-11 or Equivalent
1		Shaft Coupling, Johnson No. 252 or Equivalent
2		Panel Bearing Assemblies, Johnson No. 256 or Equivalent
1	M-2	0-200 MA DC Meter, 3" Square Case, Rear Illumination, Triplett No. 327-A or Equivalent
1	M-3	0-300 MA DC Meter, 3" Square Case, Rear Illumination, Triplett No. 327-A or Equivalent
2		Control Wheels, Complete, Coto CI-45 or Equivalent
1		Indicator Plate Marked "PWR AMP GRID" Coto CI-47 or Equivalent
1		Indicator Plate Marked "PWR AMP PLATE" Coto CI-47 or Equivalent

Misc. Parts: (Cont'd)

1		Coil Socket, National Type XB-16 or Equivalent
1	L-1	160 Meter Coil, National Type AR16-160C or Equivalent
1	L-1	80 Meter Coil, National Type AR16-80S or Equivalent
1	L-1	40 Meter Coil, National Type AR16-40S or Equivalent
1	L-1	20 Meter Coil, National Type AR16-20S or Equivalent
1	L-1	10 Meter Coil, National Type AR16-10S or Equivalent
1	L-2	Swinging Link & Jack Bar Assembly, B-W Type TV or Equivalent
1	L-2	160 Meter Coil, B-W 160 TVL or Equivalent
1	L-2	80 Meter Coil, B-W 80 TVL or Equivalent
1	L-2	40 Meter Coil, B-W 40 TVL or Equivalent
1	L-2	20 Meter Coil, B-W 20 TVL or Equivalent
1	L-2	10 Meter Coil, B-W 10 TVL or Equivalent
2		Grid Grips, National Type 12 or Equivalent
1	RFC-1	RF Choke, National Type R-154U or Equivalent

Miscellaneous screws, nuts, bolts, lock-washers, required hook-up wire and other hardware.

Circuit diagram, drawings and full size template of chassis available from Thordarson, 15 cents net each, postpaid.

250 Watt Phone Transmitter

450 WATT CW — 160 TO 10 METERS

Modulator and Power Supply

Modulator

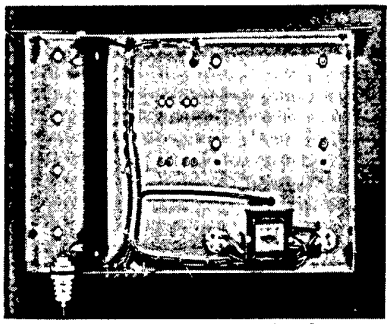

Bottom View of Power Supply

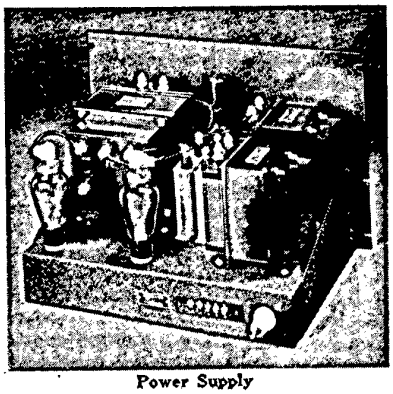

Power Supply

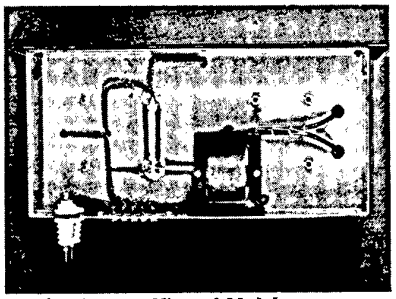

Bottom View of Modulator

Modulator Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-3	T-19F99	Filament Transformer
T-4	T-19D05	Driver Transformer
T-5	T-19M16	Modulation Transformer

Miscellaneous Parts:

2	811 Tubes
1 M-1	0-200 MA DC Meter, 3" Square Case, Rear Illumination, Triplett #327A or Equivalent
1	Punched Chassis 17" x 8" x 3"
1	Panel 19" x 10½"
1 Pr.	Chassis Mounting Brackets
1	5-Lug Terminal Board
2	Feed-thru Insulators
2	4-Contact Sockets, Steatite
2	Isolantite Plate Caps

Miscellaneous nuts, bolts, lock-washers, grommets, soldering lugs and other hardware.

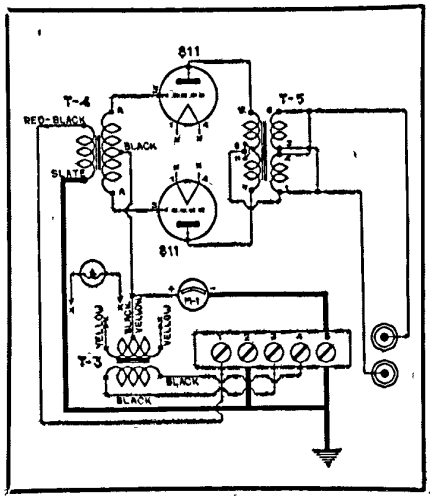

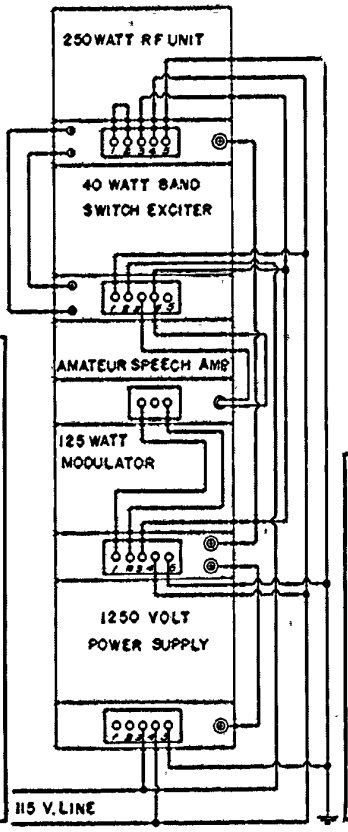

Power Supply Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-19F80	Filament Transformer
T-2	T-19P60	Plate Transformer
CH-1	T-19C37	Input Choke
CH-2	T-19C44	Smoothing Choke

Resistor:

R-1	40,000 Ohm 200 Watt Wirewound Resistor, Ohmite 1370 or Equivalent

Condensers:

C-1	2 Mfd. 1,500 Volt Condenser, GE #23F21 or Equivalent
C-2	2 Mfd. 1,500 Volt Condenser, GE #23F21 or Equivalent

Tubes:

2 866 Tubes

Miscellaneous Parts:

1	Punched Chassis 17" x 12" x 3"
1	Panel 19" x 12¼"
1 Pr.	Chassis Mounting Brackets
2	4-Contact Sockets, Steatite
1	Feed-thru Insulator
2	Isolantite Plate Caps
1 SW-1	Switch, Arrow H & H Type HDT or Equivalent
1 SW-2	Switch, Arrow H & H Type HDT or Equivalent

Miscellaneous nuts, bolts, lock-washers, soldering lugs and other hardware.

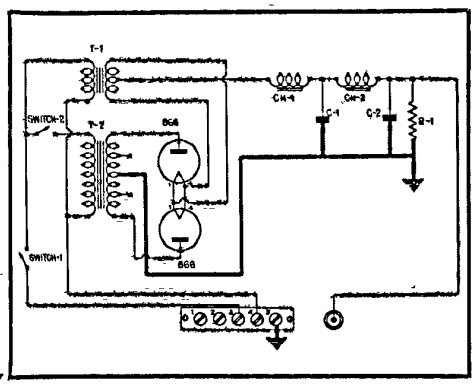

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

400 Watt Transmitter

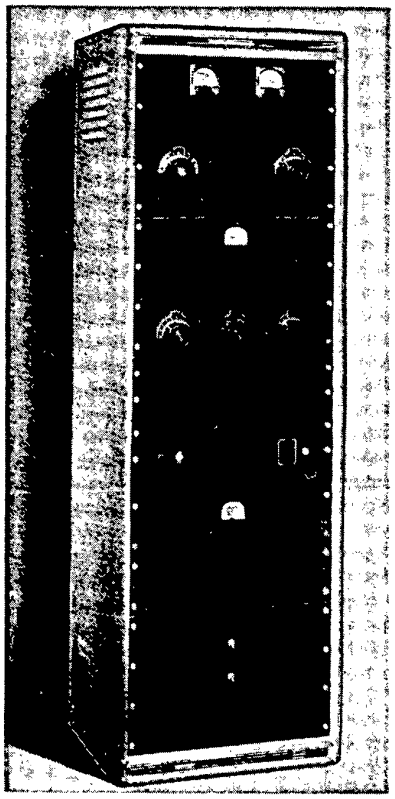

Wide Choice of Class C Tubes

★

Adjustable Excitation

★

Adjustable Loading

★

Multi-Match Modulator

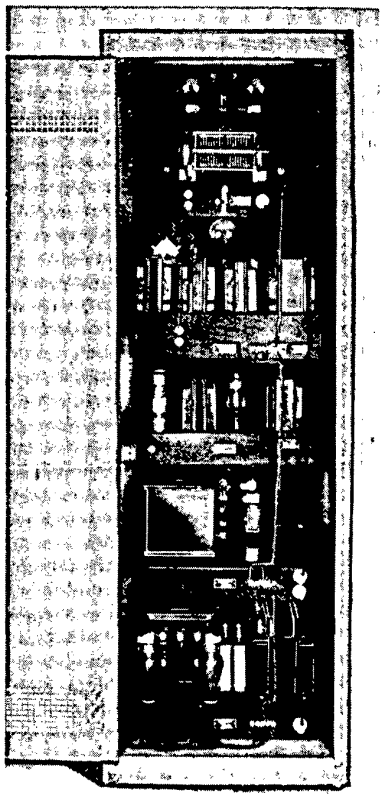

High Efficiency with Adjustable Loading

THIS 400 watt phone transmitter has the same construction and superior features of the transmitter shown on pages 24, 25 and 26. It is suitable for operation on all bands from 160 to 10 meters. It is easily driven by any exciter having an output of 20 watts; an ideal exciter for this transmitter is the Thordarson 40 Watt Band-Switch Exciter.

The transmitter is supplied with panels finished in black wrinkle, and the chassis and chassis mounting brackets are in gray flat enamel.

RF Section:

The unusual mechanical construction of the RF Section results in improved electrical performance. Flexible shafts are used to couple the grid and plate tuning condensers to the panel controls. The tubes used in the RF section are Heintz and Kaufman HK-54's or Taylor T-55's. The HK-54's require a T-19F85 filament transformer, and the T-55's, a T-19F94 filament transformer. Holes are provided on the chassis for either of these types.

A swinging link which couples the plate tank coil to the antenna, permits the amateur to adjust the loading of the final stage to the desired power input. For 400 watts input, the Class C plate current is 267 MA at 1500 volts. A plate efficiency of between 75% and 80% may be obtained when the transmitter is in proper adjustment.

The grid tank coils are the plug-in type, having link coupling to the exciter. The coils for the 80, 40, 20 and 10 meter bands have semi-fixed swinging links, and the 160 meter coil has a fixed link. Excitation should be adjusted so that the total grid current for both Class C tubes is 40 MA. The value of the grid resistor used with the HK-54's is 3750 ohms; with the T-55's, 5000 ohms.

Since the RF unit was designed primarily for phone operation, no attempt was made to install a fixed bias supply on the RF chassis. However, for CW, provision has been made on the terminal board for the connection of an external bias supply. About 45 volts of bias is required to hold the tubes at their rated dissipation with no excitation. When external bias is not used terminals No. 1 and No. 2 are connected together. If external bias is used, the negative of the bias supply connects to terminal No. 1 and the positive to No. 2.

Both the grid and the plate currents are metered. The meters are in the cathode return leads; thus placing both meters at a low DC potential with respect to the chassis, and thereby avoiding any possibility of flash-overs from the meter terminals to the pilot lamp mounting and any likelihood of deflection of the movements due to electrostatic effects.

Modulator:

The modulator, using 811's with 1500 volts on the plates, has a power output of 200 watts. The no-signal plate current for two tubes is about 70 MA. With a 200 watt sine-wave output the plate current rises to 217 MA. For speech signals of sufficient magnitude to modulate the Class C stage 100%, the average plate current is about 125 MA. The modulation transformer, as well as the driver transformer, is of the Multi-Match type so that a large variety of Class C loads and sources of driving power may be accommodated. The primary of the driver transformer is designed to couple from a "500 ohm" line. Very little driving power (3.5 watts) is needed to obtain

200 watts output; thus the large excess of power output capability of the usually chosen pair of 2A3's serving as driver tubes can be turned to good advantage in obtaining a driving voltage of exceptionally good regulation. The plate-to-plate load on the modulator tubes is 15,500 ohms.

Power Supply:

The power supply for this transmitter uses two 866's and has a rating of 500 MA at 1500 volts DC. On its 14" panel are mounted two switches: one for controlling filaments and the other for controlling the plate transformer. Having well insulated line terminals and high voltage terminals mounted on the rear apron of the chassis, the power supply matches in appearance and construction the modulator and RF units with which it was designed to operate. Its simplicity and completeness make it an excellent general purpose power supply.

RF Section

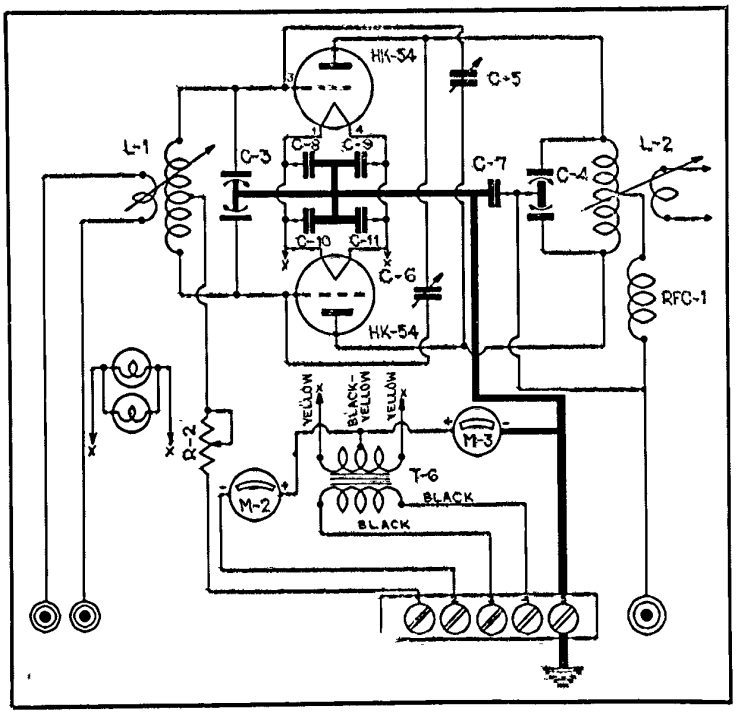

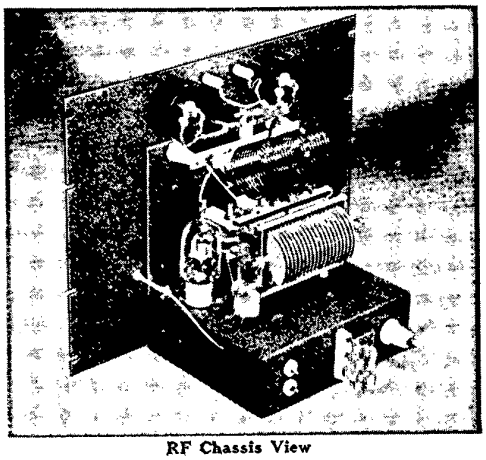

RF Chassis View

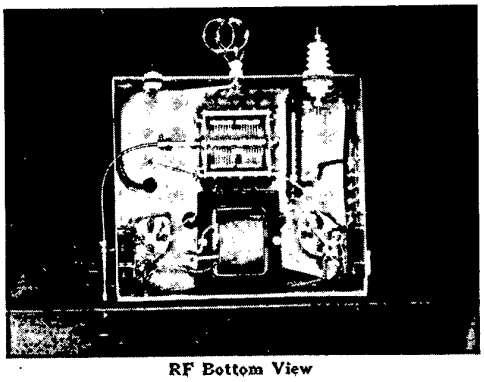

RF Bottom View

RF Section Parts Required

THORDARSON TRANSFORMER

T-6	T-19F99	Filament Transformer

Resistor:

R-2	4,000 Ohm 50 Watt Wirewound Ohmite Semi-Variable or Equivalent	

Condensers:

C-3	150-150 Mmfd. Variable Condenser, Cardwell MR-150-BD or Equivalent	
C-4	165-165 Mmfd. Variable Condenser, Cardwell XP-165-KD or Equivalent	
C-5	Neutralizing Condenser, Hammarlund N-10 or Equivalent	
C-6	Neutralizing Condenser, Hammarlund N-10 or Equivalent	
C-7	.001 Mfd. 3,500 Volt Mica Condenser Aerovox 1653 or Equivalent	
C-8	.002 Mfd. 1,000 Volt Mica Condenser CD4-6D2 or Aerovox 1455	
C-9	.002 Mfd. 1,000 Volt Mica Condenser CD4-6D2 or Aerovox 1455	
C-10	.002 Mfd. 1,000 Volt Mica Condenser CD4-6D2 or Aerovox 1455	
C-11	.002 Mfd. 1,000 Volt Mica Condenser CD4-6D2 or Aerovox 1455	

Tubes:

2	HK-54 Tubes

Miscellaneous Parts:

1		Punched Chassis 8½" x 10" x 3"
1		Panel 19" x 14"
1		Sub-Panel
1		Terminal Board
4		Bushings
3		Feed-thru Insulators
2		4-Contact Isolantite Sockets
2		Stand-off Insulators
2		Shaft Couplings, National TX-11 or Equivalent
1		Shaft Coupling, Johnson #252 or Equiv.
2		Panel Bearing Assemblies, Johnson #256 or Equivalent
1	M-2	0-200 MA DC Meter, 3" Square Case, Rear Illumination, Triplett #327-A or Equivalent
1	M-3	0-300 MA DC Meter, 3" Square Case, Rear Illumination, Triplett #327-A or Equivalent
2		Control Wheels, Complete, Coto CI-45 or Equivalent
1		Indicator Plate Marked "PWR AMP GRID" Coto CI-47 or Equivalent
1		Indicator Plate Marked "PWR AMP PLATE" Coto CI-47 or Equivalent

Misc. Parts: (Cont'd)

1		Coil Socket, National Type XB-16 or Equivalent
1	L-1	160 Meter Coil, National Type AR16-160C or Equivalent
1	L-1	80 Meter Coil, National Type AR16-80S or Equivalent
1	L-1	40 Meter Coil, National Type AR16-40S or Equivalent
1	L-1	20 Meter Coil, National Type AR16-20S or Equivalent
1	L-1	10 Meter Coil, National Type AR16-10S or Equivalent
1	L-2	Swinging Link & Jack Bar Assembly, B-W Type TV or Equivalent
1	L-2	160 Meter Coil, B-W 160 TVL or Equiv.
1	L-2	80 Meter Coil, B-W 80 TVL or Equiv.
1	L-2	40 Meter Coil, B-W 40 TVL or Equiv.
1	L-2	20 Meter Coil, B-W 20 TVL or Equiv.
1	L-2	10 Meter Coil, B-W 10 TVL or Equiv.
2		Grid Grips, National Type 12 or Equiv.
1	RFC-1	RF Choke, National Type R-154U or Equivalent

Miscellaneous screws, nuts, bolts, lock-washers, required hook-up wire and other hardware.

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

TRANSFORMER SPECIALISTS SINCE 1895

THORDARSON

400 Watt Transmitter

Modulator and Power Supply

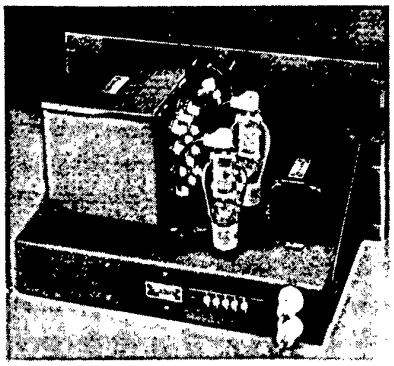

Modulator

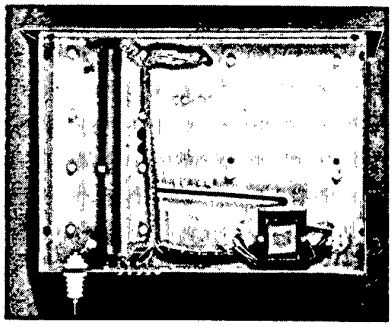

Bottom View of Power Supply

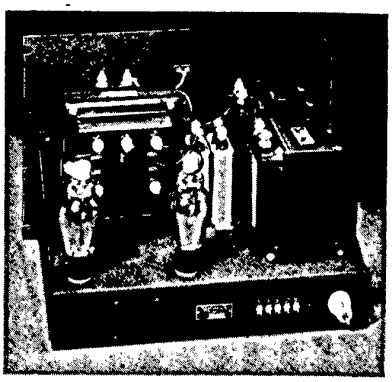

Power Supply

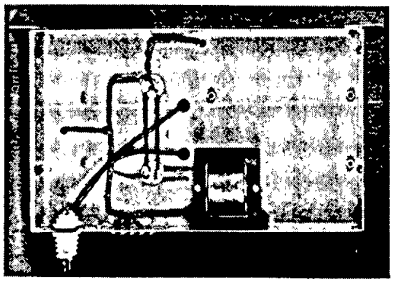

Bottom View of Modulator

Modulator Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-3	T-19F99	Filament Transformer
T-4	T-19D05	Driver Transformer
T-5	T-19M17	Modulation Transformer

Tubes:

2	811	Tubes

Miscellaneous Parts:

1	M-1	0-300 MA DC Meter, 3" Square Case Triplett 327-A or Equivalent
1		Punched Chassis 17" x 10" x 3"
1		Panel 19" x 10½"
1 Pr.		Chassis Mounting Brackets
2		Feed-thru Insulators
2		4-Contact Sockets, Steatite
2		Isolantite Plate Caps

Miscellaneous nuts, bolts, lock-washers, grommets and other hardware.

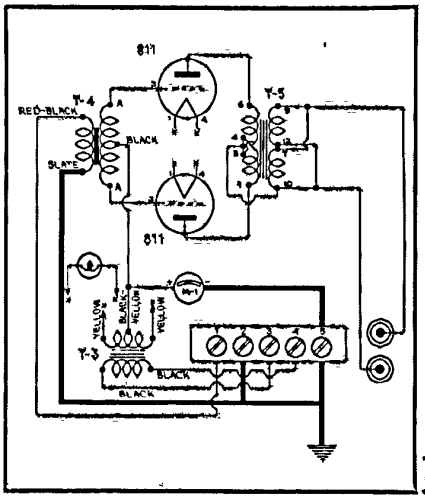

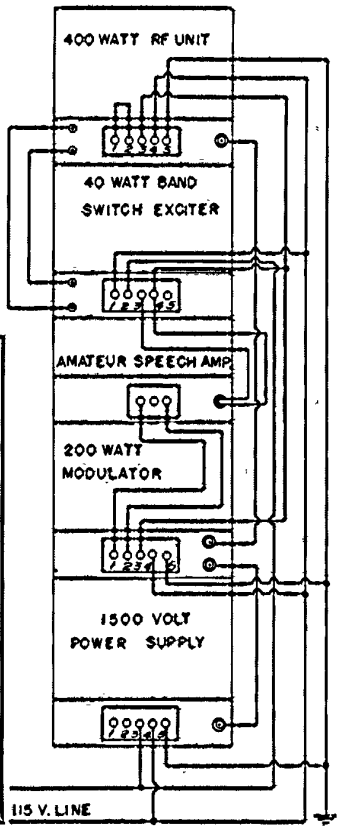

Power Supply Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-19F90	Filament Transformer
T-2	T-19P64	Plate Transformer
CH-1	T-19C37	Input Choke
CH-2	T-19C44	Smoothing Choke

Resistors:

R-1	40,000 Ohm 200 Watt Wirewound Resistor, Ohmite 1370 or Equivalent

Condensers:

C-1	2 Mfd. 2,000 Volt Condenser GE #23F31 or Equivalent
C-2	2 Mfd. 2,000 Volt Condenser GE #23F31 or Equivalent

Tubes:

2	866	Tubes

Miscellaneous Parts:

1	SW-1	Switch, Arrow H & H Type HDT or Equivalent
1	SW-2	Switch, Arrow H & H Type HDT or Equivalent
1		Punched Chassis 17" x 12" x 3"
1		Panel 19" x 12¼"
1 Pr.		Chassis Mounting Brackets
1		Terminal Board
2		4-Contact Sockets, Steatite
1		Feed-thru Insulator
2		Isolantite Plate Caps

Miscellaneous nuts, bolts, lock-washers and other hardware.

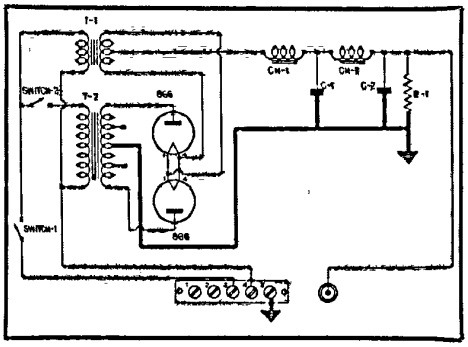

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

600 Watt Transmitter

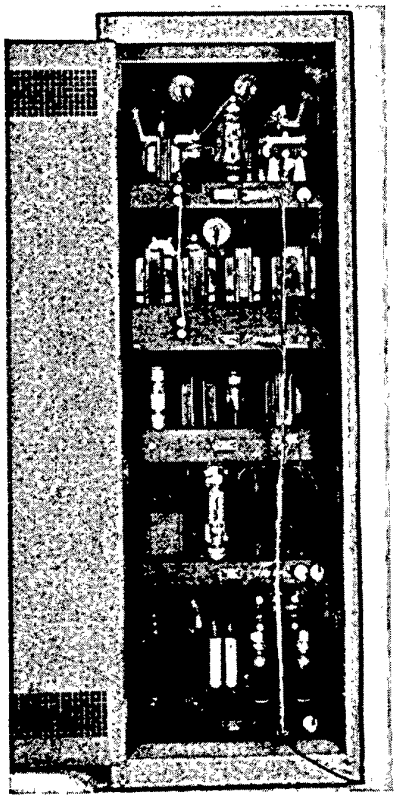

Completely Relay Controlled

★

Under Excitation Protection

★

High Quality Audio System

★

Multi-Match Modulator

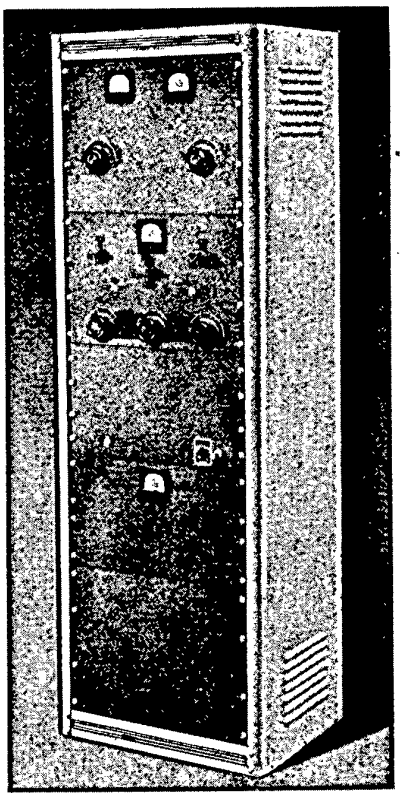

THIS transmitter consists of a Class C amplifier of 600 watts input, a modulator capable of delivering 300 watts of audio frequency power and a 1750 volt power supply of sufficient capacity to furnish the current required by both the RF stage and the modulator. Operation may be obtained on all five amateur bands from 160 to 10 meters. Relay switching is incorporated in this transmitter, thus not only permitting complete control of the transmitter with a single switch but also protecting the Class C amplifier from underexcitation and preventing the possibility of abuse to the modulation transformer by underloading it.

The Class C amplifier may be operated with any one of three types of tubes, namely Taylor TW-150's, Eimac 100TH's or Heintz and Kaufman HK-254's. The modulator tubes are Taylor 805's, and the rectifier tubes are 866's.

The panels are supplied in a black wrinkle finish; and the chassis, chassis mounting brackets and other small metal fixtures in a gray flat enamel.

RF Unit:

The Class C amplifier circuit is of the conventional push-pull type operating with 600 watts input at 1750 volts. It requires from 30 to 40 watts of driving power. The Thordarson 120 watt Band-Switch Exciter or the Thordarson 100 Watt Multi-Band Transmitter are ideal exciters. These units are described on pages 18 and 20. Plate and grid coils are of the plug-in type with a swinging link and jack bar assembly, thus permitting close adjustment of grid excitation and plate loading. Provision is made on the chassis for using either the UX sockets required by the TW-150's and the 100TH's, or the 50 watt sockets needed for use with HK-254's. The grid resistor is of the semi-variable type so that the correct bias requirements for various tubes may be met. The plate tuning condenser is of the split-stator type, having each stator section divided into two parts. This permits a very favorable L/C ratio to be obtained on all bands. The coils specified for the plate tank circuit have such a base construction that the correct stator combination is automatically obtained on each band when the coil is plugged in.

With 600 watts input the Class C plate current is 343 MA at 1750 volts. Plate efficiencies on the order of 75% are easily obtainable. When the amplifier is unloaded the plate current at resonance dips to about 25 MA on the 160, 80 and 40 meter bands; and to about 40 and 50 MA when operation is on the 20 and 10 meter bands respectively. The grid current is about 100 MA (for two tubes), and the grid resistor should be adjusted to about 1200 ohms.

Modulator:

The modulator has a "500 ohm" input and can be easily driven by the Thordarson Amateur Speech Amplifier. A rectified AC bias supply is installed on the modulator chassis. It uses a type 83 tube, which furnishes 20 volts of bias. This bias not only prevents the plate dissipation of the 805's from rising to an abnormal value during periods of no-signal but also tends to reduce distortion in the output of the modulator.

With no-signal on the grids of the 805's the plate current (two tubes) is about 80 MA. This current rises to 345 MA with a sine wave signal of magnitude sufficient to cause 100%

modulation, but for speech the same degree of modulation can be obtained when the modulator current rises to about 150 MA.

When the "500 ohm" input to the modulator grids is supplied by a Thordarson Amateur Speech Amplifier, the driver transformer ratio should be 1 to 1.4; primary to half the secondary. The turns ratio of the modulation transformer is 1.4 to 1, and the plate-to-plate load on the modulators is 10,000 ohms.

The driver and modulation transformers are of the Multi-Match type so that not only may a variety of Class C loads be accommodated but also different driving tubes may be used.

(*Continued on Page 31*)

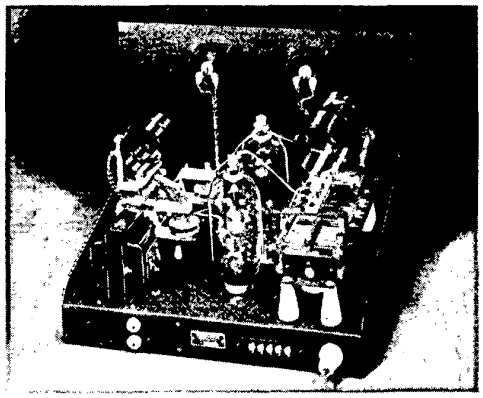

RF Chassis View

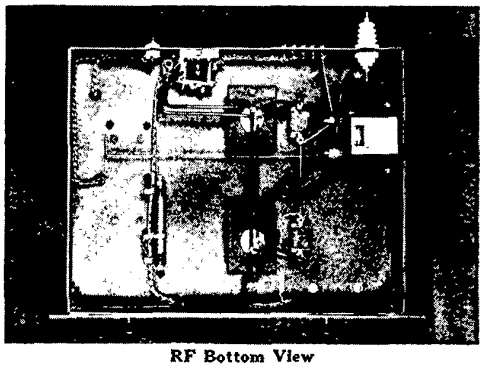

RF Bottom View

RF Section

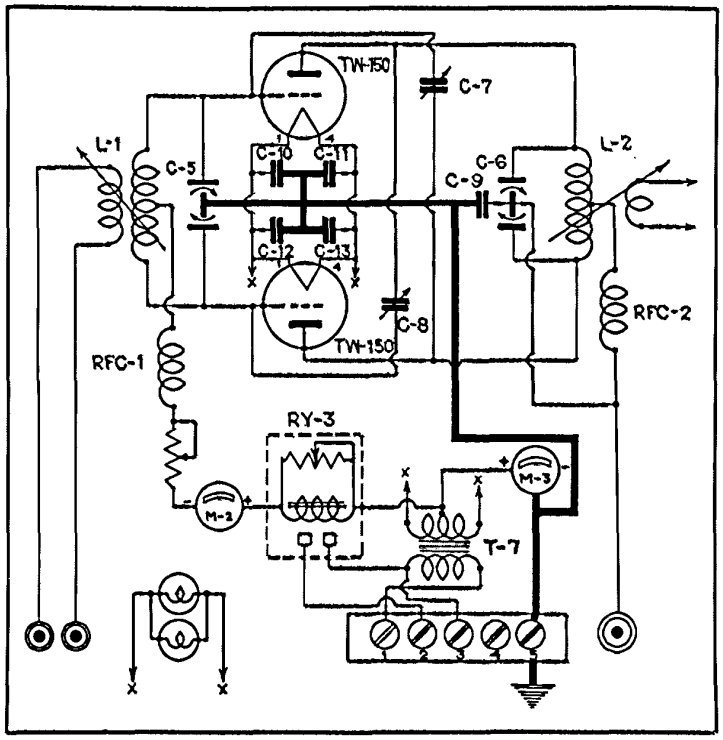

RF Section Parts Required

THORDARSON TRANSFORMER

T-7	T-74F23	Filament Transformer

Resistor:

R-3		2,500 Ohm 50 Watt Semi-Variable Resistor, Ohmite or Equivalent

Condensers:

C-5		260-260 Mmfd. Variable Condenser, Cardwell MR-260-BD or Equivalent
C-6		160-160 Mmfd. Variable Condenser, Cardwell XE-160-70-XQ or Equivalent
C-7		Neutralizing Condenser, Hammarlund N-10 or Equivalent
C-8		Neutralizing Condenser, Hammarlund N-10 or Equivalent
C-9		.001 Mfd. Mica Condenser, CD-21C-86 or Equivalent
C-10		.002 Mfd. Mica Condenser, CD-4-6D2 or Aerovox 1455
C-11		.002 Mfd. Mica Condenser, CD-4-6D2 or Aerovox 1455
C-12		.002 Mfd. Mica Condenser, CD-4-6D2 or Aerovox 1455
C-13		.002 Mfd. Mica Condenser, CD-4-6D2 or Aerovox 1455

Tubes:

TW-150 or HK-254 or 100TH

Miscellaneous Parts:

1		Punched Chassis 17" x 13" x 2½"
1		Panel 19" x 14"
1	Pr.	Chassis Mounting Brackets
2		Socket Mounting Plates
4		Condenser Mounting Brackets
2		Coil Mounting Brackets
8		Bushings
1		Feed-thru Bushing
2		Feed-thru Insulators
2		4-Contact Sockets, Steatite
2		50 Watt Sockets
4		Grid Grips
4		Cone Insulators
1	RY-3	SPST Underload Relay, Ward-Leonard 507-514A or Equivalent
1	M-2	0-200 MA DC Meter, 3" Square Case, Rear Illumination, Triplett #327A or Equivalent
1	M-3	0-500 MA DC Meter, 3" Square Case Rear Illumination, Triplett #327A or Equivalent
1	L-1	Swinging Link & Jack Bar Assembly, B-W Type BVL or Equivalent
1	L-1	160 Meter Coil, B-W Type 160 BVL or Equivalent
1	L-1	80 Meter Coil, B-W Type 80 BVL or Equivalent
1	L-1	40 Meter Coil, B-W Type 40 BVL or Equivalent

Miscellaneous Parts: (Cont.)

1	L-1	20 Meter Coil, B-W Type 20 BVL or Equivalent
1	L-1	10 Meter Coil, B-W Type 10 BVL or Equivalent
1	L-2	160 Meter Coil, B-W Type 160 TVH or Equivalent
1	L-2	80 Meter Coil, B-W Type 80 TVH or Equivalent
1	L-2	40 Meter Coil, B-W Type 40 TVH or Equivalent
1	L-2	20 Meter Coil, B-W Type 20 TVH or Equivalent
1	L-2	10 Meter Coil, B-W Type 10 TVH or Equivalent
1	L-2	Swinging Link & Jack Bar Assembly, B-W Type TVH or Equivalent
1	RFC-1	RF Choke, National Type R-100-U or Equivalent
1	RFC-2	RF Choke, National Type R-154 or Equivalent
2		4" Shaft Extensions, Yaxley RS-242 or Equivalent
2		2¼" Control Wheels, Coto CI-45 or Equivalent
1		Indicator Plate Marked "PWR AMP GRID," Coto CI-47 or Equivalent
1		Indicator Plate Marked "PWR AMP PLATE," Coto CI-47 or Equivalent

Miscellaneous screws, nuts, bolts, lock-washers, required hook-up wire and other hardware.

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

Modulator and Power Supply

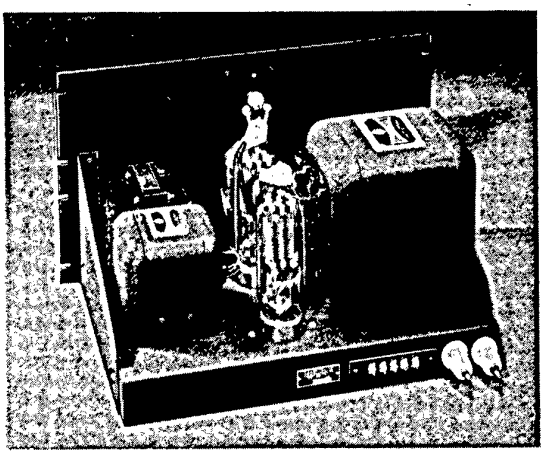

Modulator

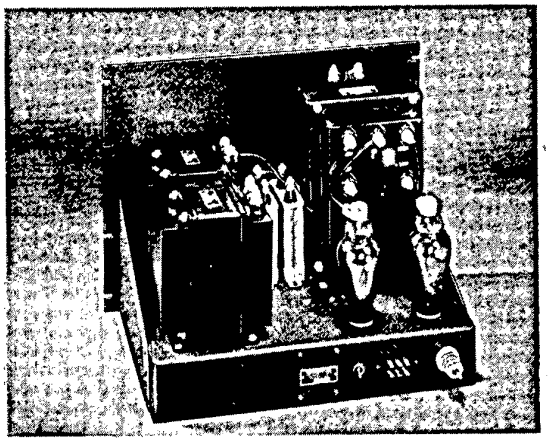

Power Supply

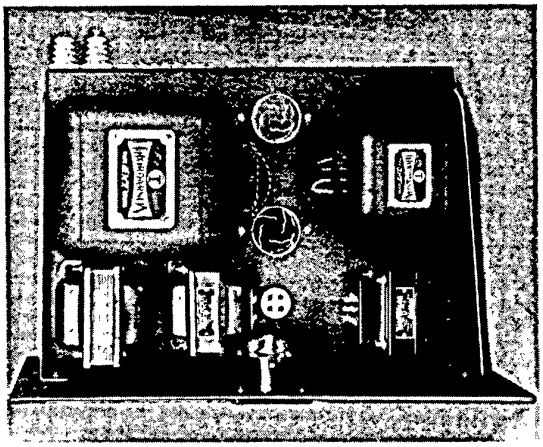

Top View of Modulator

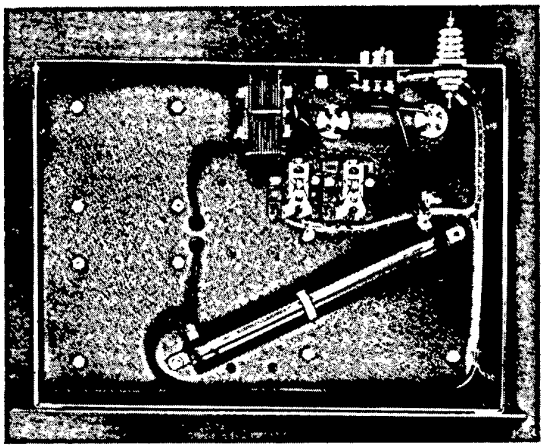

Bottom View of Power Supply

Power Supply:

FOR BOTH the convenience of the operator and the protection of the equipment, relay switching was chosen. When the filament switch on the exciter is closed, RY-1 closes, causing the application of voltage to the speech amplifier and the filaments of the rectifiers, modulator tubes and Class C amplifier tube. In addition, this operation places bias voltage on the modulator grids and prepares RY-2 for closing. Turning on the plate switch of the exciter results in the grid current in the Class C amplifier closing RY-3, which in turn causes RY-2 to apply primary voltage to the plate transformer. The opening of SW-1 prevents the operation of RY-2 even though RY-3 may be closed. This feature makes neutralizing convenient, and in addition affords more protection to the operator.

For CW operation it is only necessary to place a jumper between terminals 2 and 3 at the back of the RF chassis and insert a 22.5 volt battery at point A.

Since the power supply is rated at 1750 volts at 500 MA, 700 watts CW operation may be carried on by operating with a Class C plate current of 400 MA.

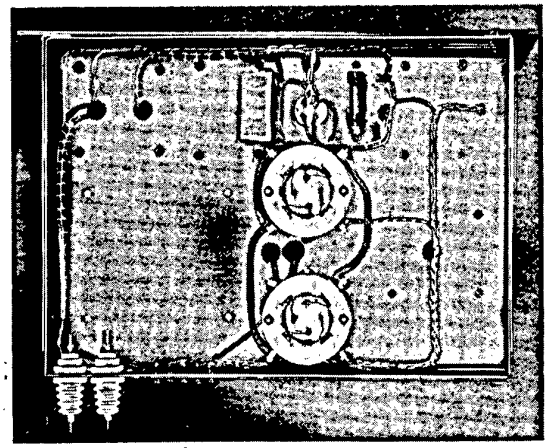

Bottom View of Modulator

600 Watt Transmitter

Modulator and Power Supply

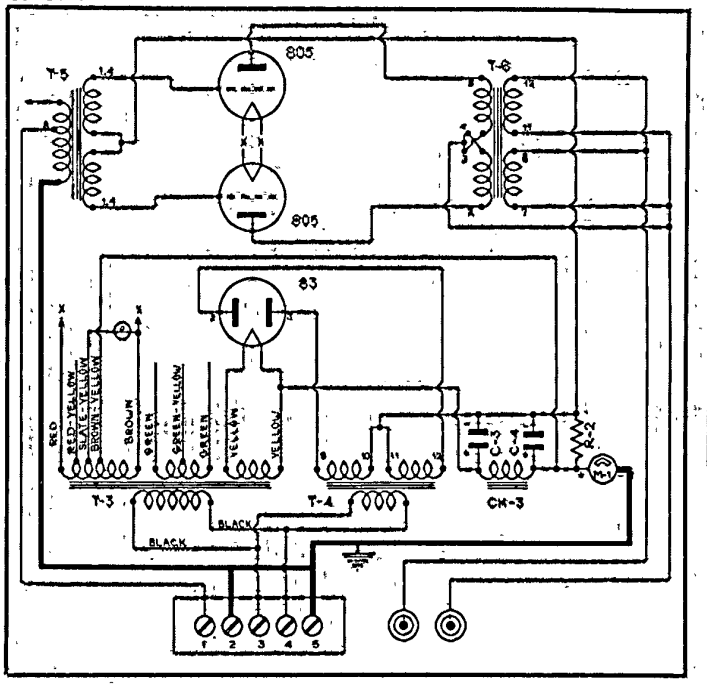

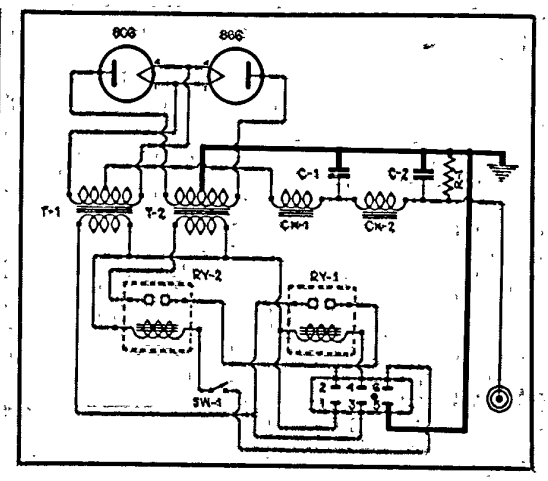

Modulator Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-3	T-19F77	Filament Transformer
T-4	T-19R31	Bias Transformer
T-5	T-15D82	Driver Transformer
T-6	T-11M77	Modulation Transformer
CH-3	T-19C42	Filter Choke

Resistors:

R-2	100 Ohm 25 Watt Semi-Variable Resistor Ohmite #0368 or Equivalent

Condensers:

C-3 } C-4 }	Double 16 Mfd. 250 Volt Condenser Aerovox Type PBS or Equivalent

Tubes:

1	83	Tube
2	805	Tubes, Taylor or Equivalent

Miscellaneous Parts:

1	0-500 MA DC Meter, 3" Square Case, Rear Illumination, Triplett #327-A or Equivalent
1	Punched Chassis 17" x 12" x 2½"
1	Panel 19" x 10½"
1 Pr.	Chassis Mounting Brackets
4	Bushings
1	Terminal Board
2	50 Watt Sockets
1	4-Contact Socket, Steatite
2	Lead-in Bushings
2	Grid Grips

Miscellaneous screws, nuts, bolts, lock-washers, required hook-up wire and other hardware.

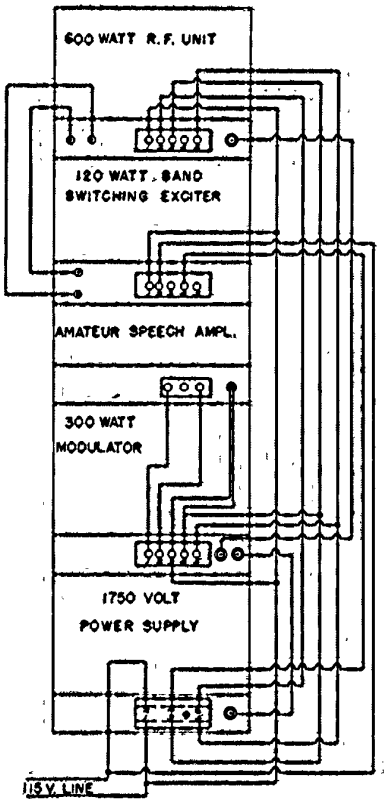

Power Supply Parts Required

THORDARSON TRANSFORMERS and CHOKES

T-1	T-19F90	Filament Transformer
T-2	T-19P66	Plate Transformer
CH-1	T-19C38	Choke
CH-2	T-19C45	Choke

Resistors:

R-1	75,000 Ohm 200 Watt Wirewound Resistor, Ohmite No. 0924 or Equivalent

Condensers:

C-1	2 Mfd. 2000 Volt Condenser, Mallory TX-811 or Equivalent
C-2	2 Mfd. 2000 Volt Condenser, Mallory TX-811 or Equivalent

Tubes:

2	866	Tubes

Miscellaneous Parts:

1 RY-1	Relay, SPST, Ward-Leonard No. 507-510 or Equivalent
1 RY-2	Relay, SPST, Ward-Leonard No. 507-513 or Equivalent
1 SW-1	SPST Switch N.P., Arrow H and H No. 20992 or Equivalent
1	Punched Chassis 17" x 13" x 2½"
1	Panel 19" x 14"
1 Pr.	Chassis Mounting Brackets
1	Switch Plate
2	4-Contact Sockets, Steatite
2	Isolantite Plate Caps
1	Lead-in Bushing
1	6-Contact Socket
1	6-Prong Plug

Miscellaneous screws, nuts, bolts, lock-washers required hook-up wire and other hardware.

Circuit diagram, drawings and full size template of chassis available from Thordarson 15 cents net each, postpaid.

1000 Watt Transmitter

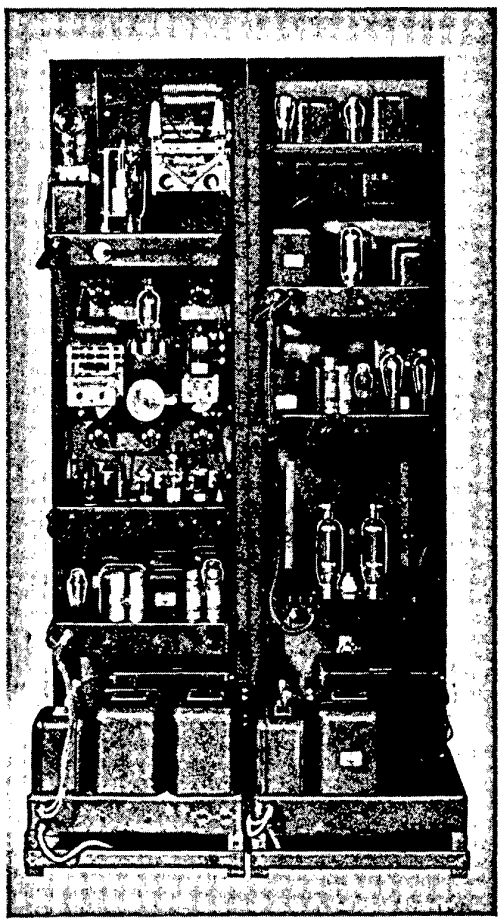

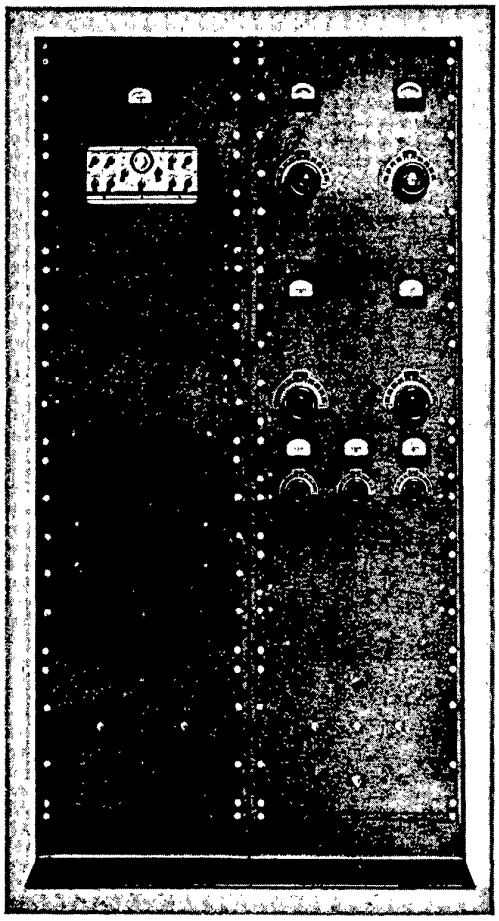

HERE is a conservatively rated transmitter which is designed to handle the maximum allowable input of 1 kilowatt. The transmitter is built up in two racks, one containing the R.F. section with associated power supplies and the other the speech equipment, drivers, modulators, and necessary power equipment.

The exciter unit is built up on a separate chassis. Three stages are provided so that there is ample excitation on all bands. It may be found necessary to neutralize the 6L6 and the RK-39, especially if they are operated as straight buffers on the higher frequencies. These neutralizing condensers (NC-1, NC-2) may consist simply of a few turns of twisted wire. The RK-39 is link coupled to the T125 buffer; this stage should always be operated as a straight amplifier and all doubling should be done in the preceeding low power stages. The buffer in turn is link coupled to the final stage, which consists of a pair of T-200's in push-pull. The plate voltage is 2500 volts and the plate current 400 M.A.; the grid current should be 125 M.A.

No pre-amplifier is incorporated in the transmitter proper. It is far more desirable, both from the standpoint of convenience and performance, to place the low level speech stages some distance from the transmitter. The impedance of the speech input is 500 ohms and the level appriximately zero db. The first stage consists of a pair of 6F6's, triode connected, which provide ample grid swing for the 845's. The 845 drivers operate at 1250 volts, and the necessary bias is obtained from a resistor in the filament return. The 822 modulators operate at 2000 volts and provide ample power to modulate the 1 kilowatt input.

An important feature of high power equipment which has not been overlooked is the installation of an underload and two overload relays.

The underload relay is so connected that the Class C current must be 250 M.A. before the modulator plate supply is turned on. Possible damage to the modulation transformer is avoided in the event that excitation to the final fails with a signal applied to the modulators. If the current of either the Class C stage or the buffer should become excessive, the overload relay will automatically turn off all plate supplies. Another overload relay is installed in the modulator plate supply, however this relay controls only the modulators. In order to simplify operation, relays are also used to control the filaments and plate supplies. The wiring is so arranged that it is impossible to turn on the plate supplies without having the filament relay closed. This relay operation of both filament and plate supplies enables the transmitter to be controlled from the operating table simply by extending the light leads connected to the relay switches.

The correct bias for the 822 modulators is —67.5, and this is shown as battery bias in the diagram, although in the photograph an experimental bias supply is shown. This bias supply has not yet been fully developed and it is felt that it should be with-held until its performance is proven satisfactory.

The pre-amplifier is shown on page 37. It is mounted in a metal cabinet and if remote control is desired the filament and plate relay switches may be mounted on this panel.

TRANSFORMER SPECIALISTS SINCE 1895 THORDARSON

1000 Watt Transmitter

(CONTINUED)

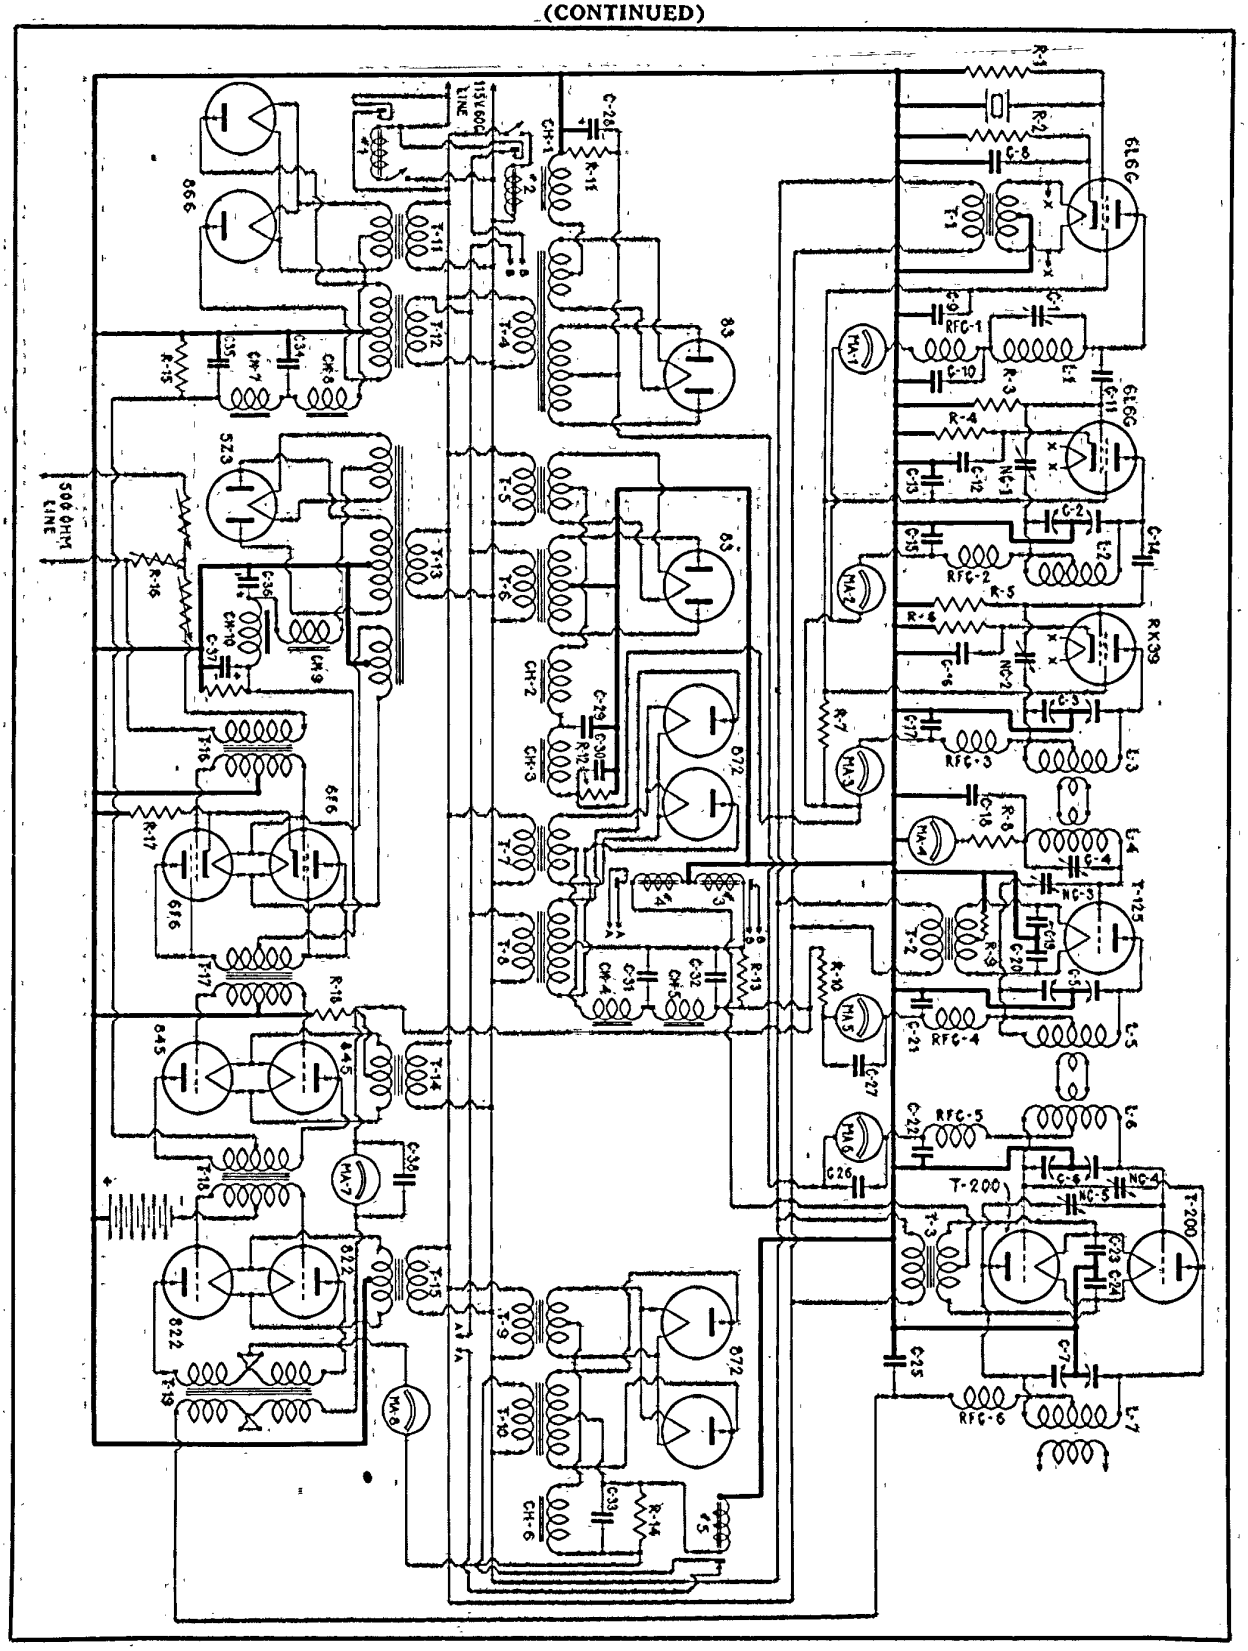

THORDARSON TRANSFORMER SPECIALISTS SINCE 1895

1000 Watt Transmitter

(CONTINUED)

Parts Required

Thordarson Transformers and Chokes

T-1	T-19F97	CH-1	T-15C36
T-2	T-19F95	CH-2	T-15C36
T-3	T-11F51	CH-3	T-15C45
T-4	T-15R60	CH-4	T-15C39
T-5	T-19F91	CH-5	T-15C48
T-6	T-15P11	CH-6	T-15C39
T-7	T-11F54	CH-7	T-15C45
T-8	T-15P21	CH-8	T-15C36
T-9	T-11F54	CH-9	T-15C36
T-10	T-15P21	CH-10	T-15C45
T-11	T-19F89		
T-12	T-15P15		
T-13	T-15R03		
T-14	T-19F96		
T-15	T-11F51		
T-16	T-15A67		
T-17	T-15D76		
T-18	T-18D19		
T-19	T-11M78		

Resistors:

R-1	50,000 Ohm 1 Watt IRC BT1 or Equiv.
R-2	200 Ohm 10 Watt Ohmite or Equiv.
R-3	10,000 Ohm 10 Watt Ohmite or Equiv.
R-4	200 Ohm 10 Watt Ohmite or Equiv.
R-5	10,000 Ohm 10 Watt Ohmite or Equiv.
R-6	50 Ohm 10 Watt Ohmite or Equiv.
R-7	5,000 Ohm 25 Watt Ohmite or Equiv.
R-8	2,000 Ohm 25 Watt Ohmite or Equiv.
R-9	2,000 Ohm 50 Watt Ohmite or Equiv.
R-10	10,000 Ohm 50 Watt Ohmite or Equiv.
R-11	1,000 Ohm 75 Watt Ohmite or Equiv.
R-12	25,000 Ohm 50 Watt Ohmite or Equiv.
R-13, R-14	100,000 Ohm 200 Watt Ohmite or Equiv.
R-15	50,000 Ohm 100 Watt Ohmite or Equiv.
R-16	500 Ohm 25 Watt T Pad Utah or Equiv.
R-17	750 Ohm 10 Watt Ohmite or Equiv.
R-18	2,000 Ohm 50 Watt Ohmite or Equiv.

CONDENSERS

Variable Condensers

C-1	150 Mmfd. Cardwell MR150BS or Equiv.
C-2, C-3	260 Mmfd. Cardwell MR260BD or Equiv.
C-4	150 Mmfd. National TMC150 or Equiv.
C-5	100 Mmfd. National TMA100DA or Equiv.
C-6	200 Mmfd. National TMC200D or Equiv.
C-7	200 Mmfd. National TMC200DA or Equiv.

Fixed Condensers:

C-8 to C-10	.001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-11	.0001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-12, C-13	.001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-14	.0001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-15 to C-20	.001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-21	.001 Mfd. 5000 Volt Mica Aerovox 1652 or Equiv.
C-22 to C-24	.001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-25	.001 Mfd. 10,000 Volt Mica Aerovox 1654 or Equiv.
C-26, C-27	.001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.
C-28	16 Mfd. 450 Volt Elec. Aerovox G475 or Equiv.
C-29, C-30	2 Mfd. 1000 Volt Aerovox 1010 or Equiv.
C-31 to C-33	2 Mfd. 3000 Volt Aerovox 3009 or Equiv.
C-34, C-35	2 Mfd. 2000 Volt Aerovox 2009 or Equiv.
C-36, C-37	8 Mfd. 450 Volt Elect. Aerovox G475 or Equiv.
C-38	.001 Mfd. 1000 Volt Mica Aerovox 1450 or Equiv.

Neutralizing Condensers:

NC-1	See note in copy
NC-2	See note in copy
NC-3	12 Mmfd. 8000 Volt National NC-150 or Equiv.
NC-4, NC-5	13 Mmfd. 12,000 Volt Johnson N375 or Equiv.

Meters:

MA-1	0-100 M.A. Simpson 27S (Illum.) or Equiv.
MA-2, MA-3	0-150 M.A. Simpson 27S (Illum.) or Equiv.
MA-4	0-100 M.A. Simpson 27S (Illum.) or Equiv.
MA-5	0-500 M.A. Simpson 27S (Illum.) or Equiv.
MA-6	0-250 M.A. Simpson 27S (Illum.) or Equiv.
MA-7, MA-8	0-750 M.A. Simpson 27S (Illum.) or Equiv.

RF Chokes:

RFC-1 to RFC-3	125 M.A. National R100 or Equiv.
RFC-4	600 M.A. National R154U or Equiv.
RFC-5	125 M.A. National R100 or Equiv.
RFC-6	600 M.A. National R154U or Equiv.

Relays:

#1, #2	Guardian B100 or Equiv.
#3	Guardian L500 or Equiv.
#4	Guardian (special) or Equiv.
#5	Guardian L500 or Equiv.

Miscellaneous Parts:

5 Pr.	Chassis Mounting Brackets
4	3¼" Wheels Coto or Equiv.
3	2¼" Wheels Coto or Equiv.
3	Coil Forms National XR-4 or Equiv.
1	Coil Assembly National UR-13 or Equiv.
2	Coils Coto-Coil 80 BTVL or Equiv.
1	Coil Coto-Coil 80 TVL or Equiv.
11	Sockets Johnson type 211 or Equiv.
2	C-1 Bases Coto-Coil 6BTLM or Equiv.
1	C-1 Base Coto-Coil 8TLM or Equiv.
2	Cone Insulators Johnson #604 or Equiv.
4	Bee Hive insulators Johnson #45 or Equiv.
8	Feed-thru insulators Johnson #42 or Equiv.
4	1" Cone insulators Johnson #601 or Equiv.
2	Insulators National #GS-2 or Equiv.
3	Insulators National #GS-1 or Equiv.
6	SPST Toggle Switches H & H or Equiv.
4	Steatite Sockets Amphenol or Equiv.
2	Steatite Octal Sockets Amphenol or Equiv.
23	Bakelite Sockets Amphenol or Equiv.
2	Bakelite Octal Sockets Amphenol or Equiv.
18	Plugs Amphenol or Equiv.
1	Bakelite Knob
14	Large Grid Grips

Tubes:

1	RK39	1	T-125
2	T-200	4	872
2	866	2	83
1	5Z3	2	6F6
2	845	2	822

26L6-G or 6L6GX

See page 37 for Pre-Amplifier

COIL DATA

BAND	160	80	40	20	10
L1, L2, L3, L4	40T #18	26T #16	12T #16	8T #16	3T #16
L5, L6	36T #16 4⅛" Diam.	34T #16 2⅞" Diam.	22T #16 2⅞" Diam.	16T #14 2⅞" Diam.	4T #14 2⅞" Diam.
L7	42T #14 5⅛" Diam.	30T #10 4⅛" Diam.	20T #10 3¼" Diam.	10T #10 3¼" Diam.	4T #10 3¼" Diam.
Link for L3, L4, L5, L6	4T #18 C.C.	3T #18 C.C.	2T #18 C.C.	2T #18 C.C.	2T #18 C.C.

L1, L2, L3 wound on 1½" Diam. winding length 1¾". L4 wound on 1¾" Diam. winding length 2". Winding length of L5, L6, 4½". Winding length of L7, 6½".

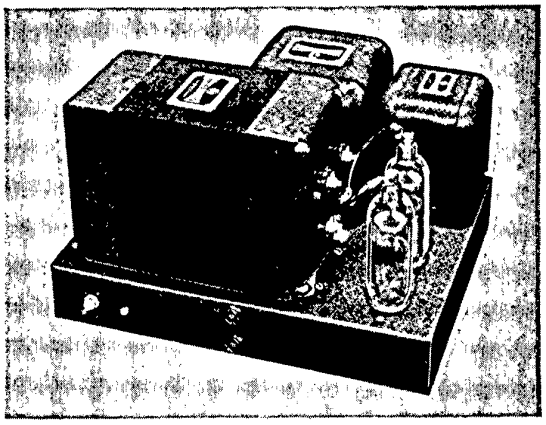

MODULATOR POWER SUPPLY
Chassis: 20" x 15" x 3¼"; Panel: 14"

TRANSFORMER SPECIALISTS SINCE 1895 THORDARSON

1000 Watt Transmitter

(CONTINUED)

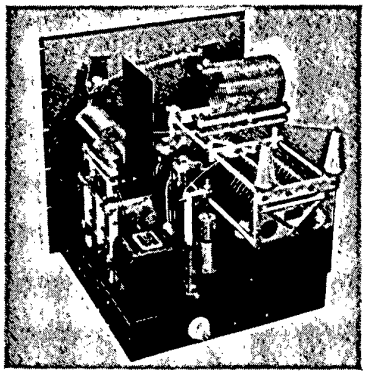

R. F. POWER AMPLIFIER
Chassis: 17" x 17" x 3"; Panel: 19¼"

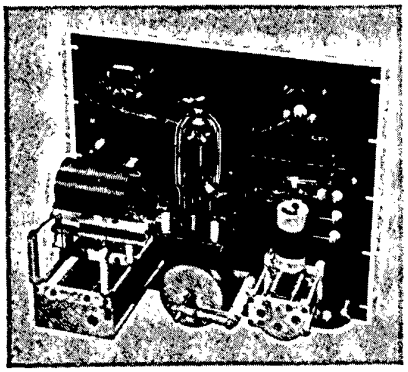

BUFFER
Chassis: 17" x 10" x 1"; Panel: 15¾"

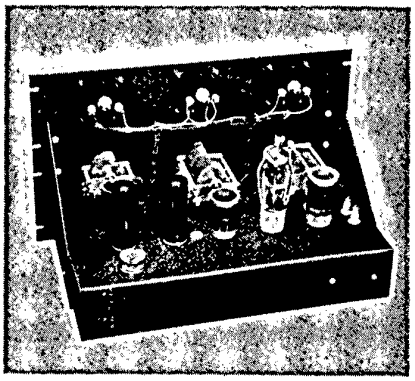

EXCITER UNIT
Chassis: 17" x 10" x 3"; Panel: 10½"

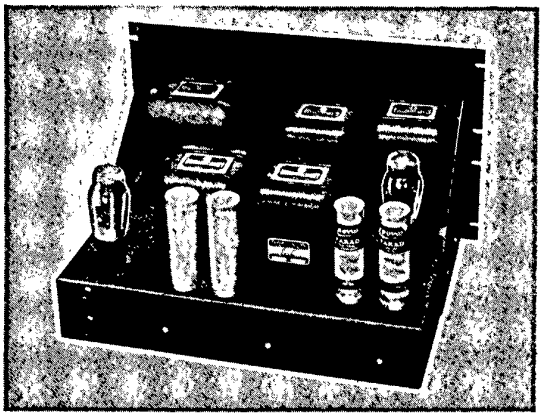

BIAS AND EXCITER POWER SUPPLIES
Chassis: 17" x 13" x 3"; Panel: 10½"

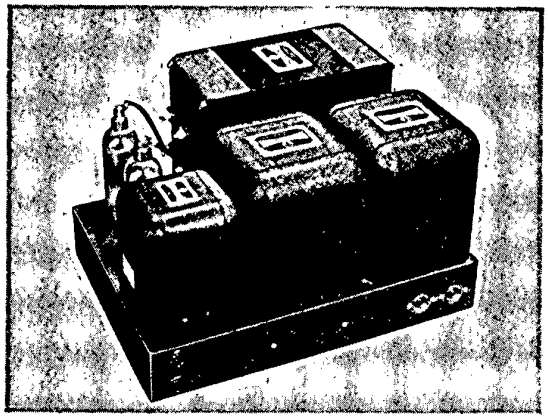

R.F. POWER SUPPLY
Chassis: 20" x 15" x 3¼"; Panel: 14"

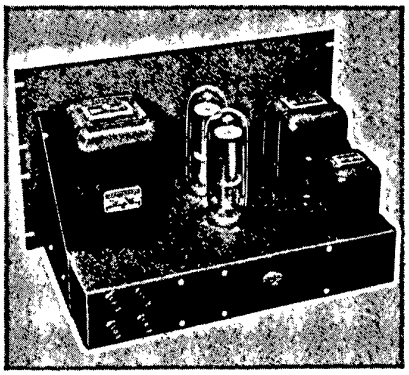

DRIVER AND SPEECH AMPLIFIER
Chassis: 17" x 10" x 3"; Panel: 10½"

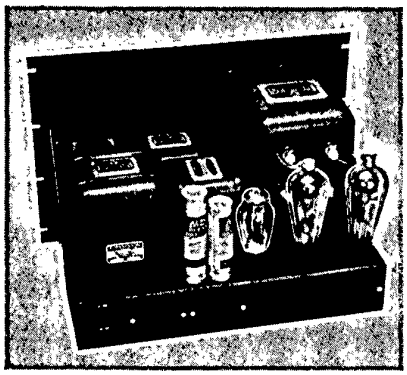

DRIVER AND SPEECH POWER SUPPLY
Chassis: 17" x 12" x 3"; Panel: 12¼"

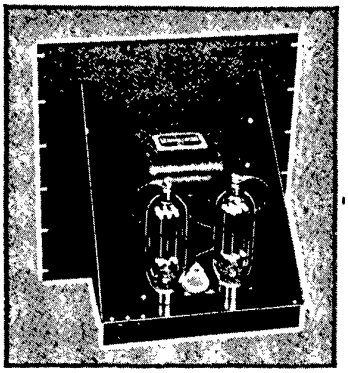

CLASS B MODULATOR
Chassis: 13" w. x 13½" d.; Panel: 19¼"

Transmitter Pre-Amplifier

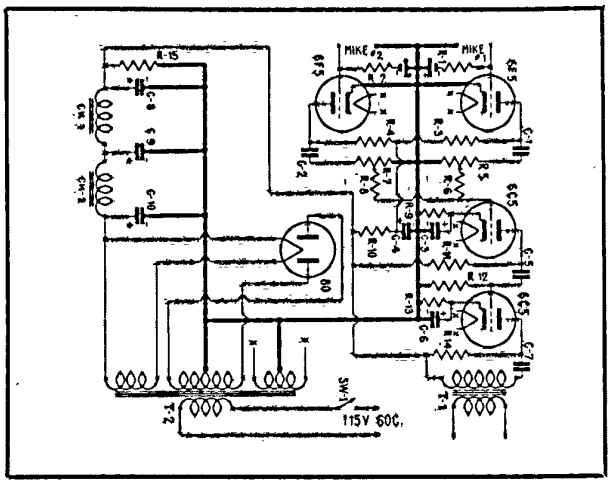

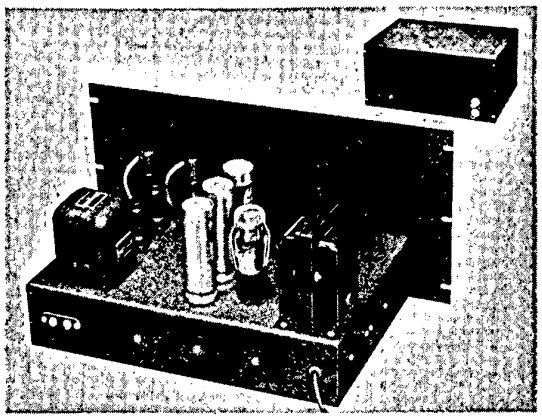

PRE-AMPLIFIER CHASSIS AND ASSEMBLY
Chassis: 17" x 10" x 3"; Case: 19" x 13" x 8¾"

PRE-AMPLIFIER PARTS REQUIRED

Thordarson Transformers and Chokes:

T-1	T-15A71	CH-1	T-13C26
T-2	T-70R78	CH-2	T-13C26

Resistors:

R-1, R-2	5 Meg. ½ Watt IRC BT½ or Equiv.
R-3	100,000 Ohm 1 Watt IRC BT1 or Equiv.
R-4	100,000 Ohm 1 Watt Ohmite or Equiv.
R-5	500,000 Ohm Volume Control IRC or Equiv.
R-6	500,000 Ohm ½ Watt IRC BT½ or Equiv.
R-7	500,000 Ohm Volume Control IRC or Equiv.
R-8	500,000 Ohm ½ Watt IRC BT½ or Equiv.
R-9	2,000 Ohm 1 Watt Ohmite or Equiv.
R-10	20,000 Ohm 1 Watt Ohmite or Equiv.
R-11	50,000 Ohm 1 Watt IRC BT1 or Equiv.
R-12	250,000 Ohm 1 Watt IRC BT1 or Equiv.
R-13	2,000 Ohm 1 Watt Ohmite or Equiv.
R-14	50,000 Ohm 1 Watt IRC BT1 or Equiv.
R-15	10,000 Ohm 25 Watt Ohmite or Equiv.

Condensers:

C-1, C-2	.1 Mfd. 400 Volt paper Aerovox 484 or Equiv.
C-3	10 Mfd. 25 Volt Elect. Aerovox PB25 or Equiv.
C-4	8 Mfd. 450 Volt Elect. Aerovox G475 or Equiv.
C-5	.1 Mfd. 400 Volt paper Aerovox 484 or Equiv.
C-6	10 Mfd. 25 Volt Elect. Aerovox PB25 or Equiv.
C-7	.1 Mfd. 400 Volt Paper Aerovox 484 or Equiv.
C-8 to C-10	8 Mfd. 450 Volt Elect. Aerovox G475 or Equiv.

Miscellaneous Parts:

2 Mike Connectors Amphenol or Equiv.
1 Bakelite Socket Amphenol or Equiv.
4 Bakelite Octal Sockets Amphenol or Equiv.
2 Bakelite Knobs
1 Terminal Strip

Tubes: 1-80, 2-6F5, 2-6C5

Thordarson Technical Literature

No. 333 — Amateur Radio . . . . . .75c Postpaid
Mr. Fortune, Thordarson engineer and a prominent amateur radio enthusiast, spent over twelve months in preparing this text-book. There are approximately 160 pages, and matters covered include Learning the Code, Receiver Theory and Construction, Crystal Oscillator Transmitter, Two-stage Transmitter, Three-stage Transmitter, Construction of the Modulator and reference notes on receivers, inductance, capacity and many other electrical and radio terms. It is a book recommended to all experimenters, beginning amateurs and even to amateurs of long experience. Amateur net price 75c. Profusely illustrated with over 100 comprehensive photographs and drawings. Heavy cover finished in wear-resistant blue cloth, with attractive gold stamping. This is a cloth covered case bound text-book.

No. 340 — Complete Transformer Manual 35c Postpaid
The Thordarson Transformer Manual is a complete book, containing the Replacement Transformer Encyclopedia and Servicing Guide, the Transmitter Guide, and the Sound Amplifier Guide, plus current Thordarson catalogs. It is bound in a strong attractive blue and orange cover with loose-leaf arrangement, giving the user opportunity to keep the Manual up-to-date by adding later Thordarson releases. A book that has proven to be most popular in the technical library.

No. 352 — Replacement Encyclopedia, Service Guide, Free
Thordarson Replacement Transformer Encyclopedia and Service Guide No. 352 recommends proper transformer and choke replacement for receivers listed in Rider's Manuals. This handy, useful time-saver, originated by Thordarson is now used by good service engineers the world over. In addition, it contains a new edition of the popular Service Guide giving practical solutions to everyday service problems, including useful charts and tables.

No. 346 — Amplifier Guide . . . . . 15c Postpaid
P. A. men and experimenters interested in building high quality amplifiers find the Thordarson Amplifier Guide No. 346 a worthwhile source of information. It contains laboratory designed and tested circuits of amplifiers from 8 to 120 watts output. Complete parts list, mechanical chassis drawings, and comprehensive illustrations enable the constructor to obtain superior results with matched transformer and choke components. Data is included for pre-amplifiers, dual tone controls, speaker impedance matching and testing.

No. 500 — Broadcast Components Catalog . . . Free
Thordarson offers a complete line of transformers and chokes for broadcast use, each capable of meeting and surpassing the most rigid broadcast tolerances. These transformers are listed and described in the new Broadcast Catalog, No. 500. Broadcast stations, experimenters, laboratories or air craft stations are urged to secure a copy of this valuable listing.

No. 600 — Amplifier Catalog . . . . . Free
The finest amplifiers are built by Thordarson — pioneers in producing quality audio components. Absolute fidelity is assured by accurate laboratory design and rigid inspection during production. New models from 8 to 900 watts satisfy practically every sound requirement. Pre-amplifiers and boosters round out a truly complete line of equipment for sound technicians. Fully described in Catalog 600.

No. 400 — Complete Transformer Catalog . . . Free
A catalog of transformers and reactors for every radio use. Contains full physical and electrical descriptions.

Obtainable from your radio parts distributors or direct from factory.

Class B Output Calculations

Class B Audio Frequency Amplifiers

CLASS B modulators are usually used in transmitters having plate modulated Class C inputs of more than 50 or 60 watts. For audio frequency power outputs of more than 30 watts, the increased cost and size of tubes which can be used in Class A amplifiers, and the power supply components used to supply these tubes make Class B systems economically justifiable.

The principal differences between Class A and Class B audio amplifiers are as follows:

1. The plate dissipation of the tubes in a Class B amplifier increases with increasing signals and is a maximum at some level near full power output. In a Class A amplifier the plate loss of the tubes is a maximum at no-signal.
2. The excitation of a Class B amplifier is carried into the positive grid region of the tube characteristics, causing grid current to flow, with the resultant requirement that the source of audio frequency excitation is called upon to deliver an appreciable amount of power. Class A amplifiers, in general, are not designed to operate with a positive grid in any condition of normal excitation.
3. In a Class B amplifier the changing plate current requires better regulation of the power supply than does the Class A amplifier.
4. Class A amplifiers usually require negative bias on the grids. In many Class B amplifiers there are conditions of operation in which no bias is required.
5. Class B audio frequency amplification requires the use of two tubes, whereas Class A amplification can be obtained with one tube.

Class B Audio Frequency Output Calculations

The amateur has many occasions in which it is desirable to have more data concerning the operation of given tubes in Class B service than are given by the tube manufacturers. The data which are given usually show typical operating characteristics at a given plate voltage, showing the plate load which delivers a given amount of power with nominal distortion, driving power, and tube losses.

In a particular installation there often arise circumstances in which operation in some condition other than the "typical" case is desirable. For example: (1) the plate supply voltage may be other than that listed; (2) more or less distortion may be tolerated; (3) greater tube losses may be permissible at full-signal or at no-signal; (4) the regulation of the source of driving voltage may be poor; (5) the voltage or power output capabilities of the driving source may be limited; (6) the output power requirements may be different; (7) the wave form of the signal may be unusual; (8) the operation may be intermittent; and (9) space and weight requirements may justify overloading.

So that the amateur may take full advantage of the possibilities of varying the plate load on his Class B tubes by changing connections on the Multi-Match modulation transformers, an example of Class B output calculations is shown below:

Suppose that a Class C amplifier of 330 watts input is to be 100% modulated by the tubes having the characteristics shown in Fig. 1. The plate

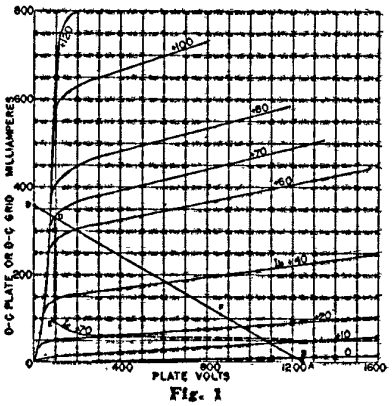

Fig. 1

supply voltage is 1250 V., the rated maximum tube dissipation is 40 watts, and the maximum plate current is 125 MA.

The audio frequency requirement is that 165 average watts of output power be delivered to the Class C stage. This figure is based on a sine wave signal. The maximum allowable power input to the modulator (two tubes) is 1250 x 0.125 x 2 = 312.5 watts. Thus an overall efficiency of at least

$$100 \times \frac{165}{312}$$

or 52.5% is required. This is not at all unreasonable for a Class B audio frequency stage; in an amplifier of power output capabilities of 150 watts an overall efficiency of 60 to 65% is easily obtainable.

Practice has shown that to allow for transformer losses and the deviation of tube characteristics from average values, the value of power delivered by the tubes as calculated from their average characteristics should be, for outputs of this order of magnitude, about 16% higher than the power required to be delivered from the secondary of the modulation transformer. In this case, the calculations should be based on a power output from the tubes of 165 x 1.16 or 192 watts output.

Since the maximum plate loss in a Class B amplifier occurs at a level slightly below maximum power output, an allowance of 35 average watts loss per tube at full signal is reasonable in this example. Considerable leeway may be taken with this in cases where speech waves of 330 watts peak power are required at the output of the modulation transformer. However, in this example, it is assumed that sine wave modulation will occur.

The power input to the two tubes at full-signal will then be the sum of power output and tube losses. This is 192 + (2 x 35) or 262 watts. A check now shows that the Class B plate efficiency, that is, the efficiency of conversion from DC energy supplied to the plate to audio frequency energy, is

$$100 \times \frac{192}{262} \text{ or } 73\%.$$

This is a reasonable value, for the maximum possible efficiency of a Class B stage is 78.5%.

For a power input of 262 watts at 1250 volts the direct current supplied is $\frac{\text{watts}}{\text{volts}}$ or $\frac{262}{1250}$ or 210 MA. The average current in each tube is half of this amount, or 105 MA. With the tubes biased to a value near cut-off, the shape of the current wave in each tube very nearly approximates that of a half-sine wave.

The average value of current in a series of half-sine wave pulses is 31.8% of the peak value of the current. Therefore, the peak value of the current in the tube is $\frac{105}{0.318}$ or 330 MA.

At the time the peak power occurs, only one of the two modulator tubes is working, and, therefore, it alone is delivering this power. The peak power is twice the average AC power developed or 2 x 192 or 384 watts. The peak AC voltage across the load is $\frac{\text{peak watts}}{\text{peak current}} = \frac{384}{0.330} = 1160$ volts. The AC load on the tube is the peak voltage divided by the peak current or $\frac{1160}{0.330} = 3500$ ohms. On the family of curves shown in figure 1, the oblique straight line AD is known as the load line. It is a plot of the instantaneous voltage and current relations for one Class B tube when working into a resistive load of 3500 ohms. The

THORDARSON TRANSFORMER SPECIALISTS SINCE 1895

location of the line is found by locating any two sets of simultaneous values of plate voltage and plate current. The value of 1160 peak volts across the load and 330 MA in the tube corresponds to a value of 1250—1160 or 90 volts across the tube. Thus e = 90 volts and i = 330 MA is one set of points. It is located at point C. Then, knowing the load, any other set of points can be found. At one-ninth power output the peak current and the peak voltage are one-third of that occurring at full power output. At this power level, then, the peak current is 110 MA, and the peak voltage across the load is $\frac{1160}{3}$ or 387. This corresponds to a peak voltage across the tube of 1250 — 387 or 863 V. Thus another point on the load line is e = 863 volts and i = 110 MA. This point is shown at F. A straight line through C and F locates the load line.

A simpler way of locating the load line is to draw a line through the point 1250 volts on the abscissae axis, which is shown at point A, and the point $\frac{1250}{R}$ or $\frac{1250}{3500}$ or 0.357 ampere on the ordinate axis. This latter point is designated as D. Then the points A, C, D and F are on the load line, and any two of them might have been used to obtain its position on the family of curves shown.

It will be seen that the point C falls on the curve corresponding to a grid voltage of +70 V. This voltage of +70 is the voltage on the grid at the instant of minimum plate voltage and peak power output. It (+70 volts) is the most positive value of grid voltage required for this condition of operation. It is to be noted that the maximum grid voltage and the minimum plate voltage occur at the same instant; furthermore, the minimum plate voltage of 90 V. is only slightly greater than the maximum grid voltage of 70 V.

The load of 3500 ohms on the plate of one audio tube represents a plate-to-plate load of four times this or 4 x 3500 = 14,000 ohms. This plate-to-plate impedance is of no particular value in the calculation of Class B performance by the method outlined above, but it is useful in describing the characteristics of the required Class B output transformer.

The calculation shown has been that for the solution of the operating characteristics for a given power output with a given tube loss. Where it is desired to find operating conditions to meet other requirements, such as a specified plate load or a specified peak driving voltage, a different order of procedure must be used. A study of the above example will be a guide in other solutions.

Whether or not the tubes are to be operated at zero bias involves the consideration of the plate loss at no-signal and the tolerable distortion. In the example given the value of no-signal plate current for zero bias voltage may be found at the intersection of the 1250 volt ordinate and the curve for Ec = 0. This is shown at the point B. Here the current for one tube is 10 MA, and the plate loss per tube is 1250 x 0.010 or 12.5 watts, well below the allowable limit.

The dotted curve represents the relation of grid current to plate voltage for a grid voltage of +70 volts. If from the coordinates Ep = 90, Ip = 330, a vertical line is passed which intersects the dotted line at E, the ordinate (90 MA) at this point represents the peak value of grid current. The peak grid driving power required to obtain full output under the conditions specified may now be obtained. It is Eg x Ig = 70 x 0.090 = 6.3 watts. The ratio of peak driving power to average driving power depends mainly upon the plate load, the type of tube, and the peak grid voltage and its relation to the minimum plate voltage. For some conditions of operation the average power is one-half the peak power, and for other conditions it may be only one-third or one-fourth the peak power.

The following characteristics have thus been obtained for two tubes in a Class B stage:

Plate voltage — 1250 volts
Average no-signal plate current — 20 MA
Average full-signal plate current — 210 MA.
DC grid volts — 0
Peak grid-to-grid voltage — 140 volts
No-signal plate loss — 25 watts
Full-signal plate loss — 70 watts
Load resistance (per tube) — 3500 ohms
Plate-to-plate load — 14,000 ohms
Peak driving power — 6.3 watts
Plate efficiency — 73%
Stage efficiency — 65%
Power output — 165 watts

The maximum efficiency of a Class B amplifier is 78.5%. This value is realized only when the instantaneous plate voltage swings to zero and the half-sine wave shape of current in each tube is retained.

In the example given, if such a condition could be obtained, the average plate current (two tubes) would be 0.357 x 0.318 x 2 = 0.227 ampere. The power output would be 0.357 x $\frac{1250}{2}$ = 223 watts, and the power input would be 1250 x 0.227 = 284 watts for an efficiency of 100 x $\frac{223}{284}$ or 78.5%.

Considerations in Selecting Driver Transformer Ratios

Although the driving power for a Class B stage is usually obtained from a Class A amplifier, ordinary Class A amplifier design for maximum power output does not suffice. Most Class A amplifiers not intended for driver service are planned to deliver the maximum possible undistorted power into a given fixed load.

Unfortunately, the load on Class A tubes in driver service is not constant throughout the cycle. This is due to the fact that the grids of the modulator tubes do not have a constant resistance over the audio cycle. In the positive grid region the grid current increases more rapidly than the grid voltage, thus exhibiting the characteristic of a decreasing grid resistance with increasing voltage. The degree to which the resistance changes depends mainly upon the relation between minimum plate voltage and maximum grid voltage. For tubes operated with zero bias the resistance change in most cases is, fortunately, not large. In a Class B stage working into a resistance load, the maximum instantaneous grid voltage and the minimum instantaneous plate voltage occur at the same time. During the part of the cycle that the minimum plate voltage and the maximum grid voltage are not greatly different, the change in grid-to-cathode resistance is most apparent. It is well to plan to have the ratio of minimum plate voltage to maximum grid voltage exceed two in cases where low driver distortion is desired. In instances where more driver distortion can be tolerated, or in cases where the apparent internal-output impedance of the driver is very low, as compared with the minimum Class B grid resistance, this ratio may be reduced to 1.0 or 1.5. With tubes having negative grid bias the resistance changes from a very high value to a very low value within a small per cent of the time required for a complete cycle.

If a driving voltage of perfect regulation were available, this change in resistance would not be of such serious consequence. However, all practical drivers have some internal impedance, and in delivering energy to a varying load, harmonic distortion will occur. If the internal output impedance of the driver has an appreciable reactance, extremely disagreeable distortion can result. This is especially true if the Class B grids are biased. It is important to have a driver transformer having a low leakage reactance.

TRANSFORMER SPECIALISTS SINCE 1895 THORDARSON

Driver Transformer Ratios

AN IMPORTANT problem in the selection of a driver is to obtain a source of adequate voltage of good regulation without prohibitive amounts of driver tube capacity. Fortunately, there are receiving tubes (2A3's) which will supply driving power for most modulators having power outputs up to several hundred watts.

In general, for amateur work, the amateur should use tubes which in normal Class A amplifier service will deliver an average power output of at least one-half as much as the peak power required to supply the Class B grids. It is preferable in nearly all cases to have the average power output capabilities of the driver be one to two times as great as the peak power requirements of the Class B grids. This corresponds to peak power capabilities of two to four times the peak power which is required at the driver grids. The ratio of average power capacity of driver to peak power required at the Class B grids may approach the lower value when the Class B tubes are operated at zero bias and the ratio of minimum plate voltage to maximum grid voltage is large (two or more). In such a case, the grid resistance is substantially constant during the cycle.

The installation of driving tubes having power output capabilities greater than required allows the changing of the plate load from that which is optimum for maximum undistorted output to a higher value which delivers less power, but which lowers the internal impedance of the driving source as seen from the Class B grids.

In selecting the turns ratio of a driver transformer, it is desirable to make the step-down ratio as high as possible from the driver plates to the Class B grids and yet be able to develop the required peak driving voltage on the Class B grids without overloading the driver tube.

The determination of the correct driver transformer ratio can be studied by reference to the following discussion. In figure 2, Eg is the peak value of the AC voltage required on the Class B grid. Rg is the grid resistance at this value of voltage. (This is the lowest value of grid resistance.) RD is the internal resistance of the source of driving energy, and ED is the peak open circuit voltage developed by the driver source. The transformer ratio is N to 1, primary to secondary. Figure 3 is a simplified version in which the secondary voltage and resistance are

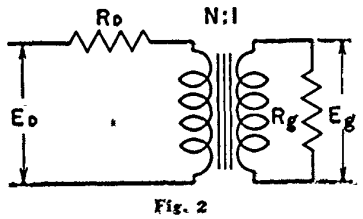

Fig. 2



Fig. 3

reflected to the primary side of the transformer. The secondary voltage is stepped up N times and appears across the primary as NEg. The secondary load, in accordance with regular transformer theory, is stepped up N^2 times and appears to the primary as N^2Rg.

At all instants the ratio of the voltages is equal to the ratio of the resistances across which they occur. Thus:

$$\frac{E_D}{NE_g} = \frac{R_D + N^2R_g}{N^2R_g}$$

There are two solutions, one giving a turns ratio which gives relatively good regulation and the other giving a turns ratio with poor regulation. For either solution there is adequate driving voltage. The desired solution is given by the formula:

$$N = \frac{E_DR_g + \sqrt{E_D^2R_g^2 - E_g^2R_gR_D}}{2E_gR_g}$$

Example:

Assume a pair of push-pull 2A3's with 300 volts on the plates, 60 volts bias and an available signal of 53 peak volts on each 2A3 grid. The Class B grid minimum resistance is 780 ohms at +70 volts. The Class B tubes are at zero bias. The 2A3 tubes have a mu of 4.2 and a plate resistance of 1050 ohms.

Solution:

The open circuit driving voltage of two 2A3's in series is 2 x 4.2 x 53 or 445 volts. This voltage may be considered as that in a generator of internal resistance Rp x 2 or 1050 x 2 or 2100 ohms. Then:

$$N = \frac{445 \times 780 + \sqrt{(445)^2(780)^2 - (70)^2(780)(2100)}}{2 \times 70 \times 780}$$

Solving:

N = 6.25, which is the turns ratio from the total primary to one-half the secondary. In this case, the 780 ohm grid load is reflected as a 30,500 ohm plate-to-plate load on the 2A3's, much higher than the 5000 ohm plate-to-plate load often encountered.

Line to Class B Grid Driver Ratio

In selecting the driver transformer to transfer energy from a so-called "500 ohm" line to Class B grids, the fact is often overlooked that the "500 ohm" line is usually not of 500 ohms internal output resistance. Its internal output resistance (when the source of energy to it is not "padded down") is usually far from being 500 ohms. This is of considerable consequence in calculating driver transformer ratios.

Suppose, for example, that the "500 ohm" line had been fed from two 2A3's having an amplification factor of 4.2, a plate resistance of 1050 ohms and a maximum available signal voltage on their grids of 53 peak volts. If the 2A3 output transformer was designed to place a 5000 ohm plate-to-plate load on the tubes when a 500 ohm load was connected to the secondary, the turns ratio of total primary to total secondary would be 3.16 to 1. The 500 ohm line would then have an internal impedance of $\frac{2 \times 1050}{(3.16)^2}$

or 210 ohms, and the maximum available open circuit voltage on the line side of the transformer would be $2 \times 53 \times \frac{4.2}{3.16}$ or 140 peak volts. This voltage and the source resistance of 210 ohms should be used in calculating the line to Class B grid ratio.

For the Class B grid condition previously given, the solution yields:

$$N = \frac{140 \times 780 + \sqrt{(140)^2(780)^2 - (70)^2(210)(780)}}{2 \times 70 \times 780}$$

which gives N = 1.97 as the ratio from the line to one grid (that is, the primary to one-half the secondary). It is to be noted that this ratio (1.97) multiplied by the ratio of the transformer with which it is associated (3.16) gives 1.97 x 3.16 = 6.25, which is the ratio obtained for the solution of turns ratio for a driver transformer coupling the 2A3 plates directly to the grids.

In the calculation of driver ratio shown, no allowance has been made for transformer losses or for deviations of the driver tube characteristics from the average values given by tube manufacturers. Furthermore, it is not well to have a peak signal on the driver tube grids which reduces that grid voltage to zero. It is better to limit the maximum peak grid voltage on the driver to about 95% of the bias voltage. Allowance for these three factors can be made by reducing the step-down ratio of the driver transformer 10 to 15%.

THORDARSON TRANSFORMER SPECIALISTS SINCE 1895

Matching Class C Loads to Modulators

HAVING selected the proper load resistance into which the modulator should deliver energy it is necessary to couple the modulator to its Class C load through a transformer of the proper turns ratio.

It is characteristic of a transformer that the resistance to which the secondary delivers energy can appear as a different value of resistance at the primary terminals. The degree to which this actual load resistance and the reflected load resistance differ depends upon the turns ratio of the transformer. Of the total energy supplied to the primary of a transformer almost all is available for delivery to the load on the secondary. Thus, the actual load resistance presented by the Class C amplifier may be made to appear as the desired load on the modulator tubes, and all of the alternating current energy developed in the modulator stage can be delivered to the Class C amplifier and its load. In general, then, a transformer may be thought of as an impedance changing device in which very little of the energy supplied to it is lost. In amateur work, the transformers are of such size and construction that the efficiency is good enough that little attention need be given to the losses; that is, for most calculations it may be assumed to behave as an ideal transformer.

To show how a transformer acts as an impedance changing device the following demonstration is given:

Referring to Figure 4 a transformer is shown having a turns ratio of primary to secondary of 1 to N. The load



Fig. 4

on the secondary is R ohms, and the voltage impressed on the primary is E.

Ordinary transformer theory indicates that the voltage across each winding is proportional to the number of turns on the winding. Thus, with E volts across the primary, the voltage across the secondary is N times as much, or NE. The power at the load resistance R is equal to the square of the voltage across it divided by the resistance. Thus, in this case the power at the secondary load is $\frac{NE)^2}{R}$.

With a perfect transformer the power at the primary is the same value as it is at the secondary. Thus, the power at the primary is also $\frac{(NE)^2}{R}$.

For the moment, assume the secondary load resistance, R, appears at the primary terminals as another resistance, R_1. It is desired to find the value of the turns ratio of secondary to primary in terms of these resistances, R and R_1. The power at the primary of the transformer is $\frac{E^2}{R_1}$. But this value is also equal to $\frac{(NE)^2}{R}$. Therefore,

$$\frac{E^2}{R_1} = \frac{(NE)^2}{R} \text{ or } \frac{1}{R_1} = \frac{N^2}{R} \text{ and } N^2 = \frac{R}{R_1}$$

Thus, it is to be seen that the reflected resistance is equal to the secondary resistance divided by the square of the turns ratio from secondary to primary. Stated in another manner, the reflected resistance is equal to the secondary resistance multiplied by the square of the turns ratio from primary to secondary. It is important not to become confused by the indiscriminate use of the terms "turns ratio," "step-up ratio" and the like. These terms are used interchangeably, but they are not necessarily equal to each other.

Suppose, for example, that it is desired to calculate the turns ratio of the full primary to the full secondary of a modulation transformer used under the following conditions:

Power input to Class C amplifier — 330 watts.

Plate voltage on Class C amplifier — 1250 volts.

Modulator plate-to-plate load desired — 14000 ohms.

The Class C plate current is $\frac{W}{E}$ or $\frac{330}{1250}$ or 0.264 amperes. The Class C load on the secondary of the modulation transformer is then $\frac{E}{I}$ or $\frac{1250}{0.264}$ or 4740 ohms. This is equal to R.

Then, if $N^2 = \frac{R}{R_1}$, $N^2 = \frac{4740}{14000} =$ 0.338 and N is equal to the square root of this value, or 0.58. In this case N is the ratio of secondary turns to primary turns. The value of 0.58, being less than unity, indicates that the secondary has less turns than the primary. This is as it should be when a given Class C load is less than the plate-to-plate load which it is desired be reflected on the primary side of the modulation transformer. The amateur may avoid making the mistake of obtaining a turns ratio which is the inverse of the proper value by always making an estimate of which winding, primary or secondary, has the greater number of turns, this estimate to be made before the start of calculations.

MULTI-MATCH MODULATION TRANSFORMER RATIOS

Tapped double winding coils as used in Multi-Match modulation transformers make possible a large number of impedance ratios, so many in fact that it is not practical to list in table form all the combinations possible. However, there are occasions when the modulator plate-to-plate load, or the Class C load, are of values not shown in the table and yet are within the range covered by the transformer. The chart shown on the opposite page may be used to determine the correct modulation transformer connections when the desired turns ratio is known. The transformer connections may then be found from the list of ratios in the adjoining table. As an example, to match a 10,000 ohm plate-to-plate load to a Class C load of 5000 ohms, a turns ratio of $\sqrt{\frac{10,000}{5,000}}$ or 1.41 is necessary. The connections shown in the table should be used to secure this ratio. In this particular case these connections are:

For the primary, connect the modulator plates to terminals 2 and 5; 3 and 4 are joined and connected to the modulator plate supply. For the secondary, join terminals 7-11 and 8-12. Connect the Class C load to terminals 7 and 8.

Since only part of the winding is used for some combinations, the maximum allowable value of plate-to-plate load is necessarily variable. This maximum value is shown in the last column of the table and should not be exceeded.

Care should be taken that the DC secondary current does not exceed the maximum rating of the transformer. A parallel connected secondary will carry twice the current of a series connection, and in the event that the Class C current is greater than the allowable current of the series connection, a parallel connection must be used.

—Connections for Matching Multi-Match and Universal Transformers—

Turns Ratio Primary to Secondary	PRIMARY			SECONDARY				Maximum Allowable Plate to Plate Load
				SERIES		PARALLEL		
	Plate	B +	Plate	Join Together	Connect Class "C" Load To	Join Together	Connect Class "C" Load To	
3.14	2	3-4	5			8-9 10-11	8-10	12000 Ohms
2.88	7	8-11	12			2-3 4-5	2-4	16000 Ohms
2.8	1	3-4	6	9-10	8-11			20000 Ohms
2.61	7	9-10	12	2-5	1-6			20000 Ohms
2.5	1	2-5	6			8-9 10-11	8-10	10000 Ohms
2.5	1	3-4	6			7-11 8-12	7-8	20000 Ohms
2.32	7	9-10	12			1-3 4-6	1-4	20000 Ohms
2.07	7	9-10	12	3-4	2-5			20000 Ohms
1.8	7	8-11	12	2-5	1-6			16000 Ohms
1.73	1	3-4	6			7-9 10-12	7-10	20000 Ohms
1.61	8	9-10	11			2-6 1-5	1-2	8000 Ohms
1.60	7	8-11	12			1-3 4-6	1-4	16000 Ohms
1.59	7	9-10	12	2-3	1-6			20000 Ohms
1.57	2	3-4	5	9-10	8-11			12000 Ohms
1.49	7	9-10	12	3-4	2-6			20000 Ohms
1.44	7	8-11	12	3-4	2-5			16000 Ohms
1.4	2	3-4	5			7-11 8-12	7-8	12000 Ohms
1.32	1	3-4	6	9-10	8-12			20000 Ohms
1.28	8	9-10	11			2-3 4-5	2-4	8000 Ohms
1.25	1	3-4	6	8-11	7-12			20000 Ohms
1.25	1	2-5	6	9-10	8-11			10000 Ohms
1.15	7	9-10	12	3-4	1-6			20000 Ohms
1.11	1	2-5	6			7-11 8-12	7-8	10000 Ohms
1.1	7	8-11	12	2-3	1-6			16000 Ohms
1.03	7	8-11	12	3-4	2-6			16000 Ohms
1.02	1	3-4	6	8-9	7-12			20000 Ohms
.967	2	3-4	5			7-9 10-12	7-10	12000 Ohms
.866	1	3-4	6	9-10	7-12			20000 Ohms
.8	7	8-11	12	3-4	1-6			16000 Ohms
.77	1	2-5	6			7-9 10-12	7-10	10000 Ohms
.742	2	3-4	5	9-10	8-12			12000 Ohms
.714	8	9-10	11			1-3 4-6	1-4	8000 Ohms
.7	2	3-4	5	8-11	7-12			12000 Ohms
.639	8	9-10	11	3-4	2-5			8000 Ohms
.588	1	2-5	6	9-10	8-12			10000 Ohms
.575	2	3-4	5	8-9	7-12			12000 Ohms
.555	1	2-5	6	8-11	7-12			10000 Ohms
.495	8	9-10	11	2-3	1-6			8000 Ohms
.483	2	3-4	5	9-10	7-12			12000 Ohms
.458	8	9-10	11	3-4	2-6			8000 Ohms
.455	1	2-5	6	8-9	7-12			10000 Ohms
.385	1	2-5	6	9-10	7-12			10000 Ohms
.357	8	9-10	11	3-4	1-6			8000 Ohms

Thordarson Multi-Match Transformer Ratings

Type No.	Max. Audio Watts	Max. Pri. M.A. Each Side	Max. Sec. M.A. Series	Max. Sec. M.A. Parallel
T-11M74	40	100	80	160
T-11M75	75	145	145	290
T-11M76	125	210	160	320
T-11M77	300	250	250	500
T-11M78	500	320	320	640
T-19M13	15	50	50	100
T-19M14	30	75	75	150
T-19M15	60	125	125	250
T-19M16	100	175	175	350
T-19M17	250	225	225	450

Matched Power Supplies

THESE matched power supplies provide the amateur with any of the direct current voltages ordinarily encountered in amateur radio work. The dual transformers T-19P57, T-19P70 and T-19P71 are especially useful for transmitters having low voltage exciter and high voltage final amplifier stages on the same chassis. The transformer T-19P58 is especially useful in transmitters with a Class B modulator and Class C amplifier having slightly different plate voltage requirements. All of them may be depended upon to give the rated direct current voltage and current when using the prescribed chokes.

For CW work or for use in transmitters where the Class B modulator and Class C amplifier plate voltage are to be taken from one supply, the excellent regulation of these matched units is desirable. When the bleeder, R, is of such magnitude as to drain approximately 10% of the rated current, the regulation of these supplies is approximately 15% and the ripple is approximately 1%.

The power supplies using the transformer T-1, marked with an asterisk, are dual supplies; that is, power is supplied at two direct current voltages simultaneously. The dual supplies using the transformers T-19P58 and T-19P71 use two chokes in each B+ lead, and the proper chokes are specified opposite these transformers. For the dual supplies using the transformers T-19P57 and T-19P70, two chokes in the high voltage center tap connection provide filtering for both the direct current voltages obtainable. The rated secondary load currents of each of these four dual plate transformers may be delivered simultaneously. But, when it is desired to use only the low voltage tap on any one of these dual units, the current rating of this tap is then equal to the sum of the current ratings of the two sections.

The filament transformer chosen for each plate supply is designed for mounting underneath the chassis. The plate transformers and chokes are supplied with black cases to provide not only matched electrical performance but also matched appearance in the rig.

The T-19F83 filament transformer supplies the filament of a 5Z3, the T-19F88 is for 866JR's and the T-19F90 is for 866's. The T-19F78 filament transformer is to be used with a 5Z3 and 866JR's.

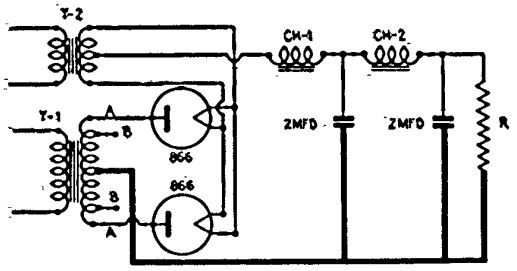

Power Trans. T-1	DC Volts from Tap A	DC Volts from Tap B	DC MA	Input Choke CH-1	Smoothing Choke CH-2	Fil. Trans. T-2
T-19P54	400		150	T-19C39	T-19C46	T-19F83
T-19P55	500	400	250	T-19C36	T-19C43	T-19F88
T-19P70*	750		100	T-19C36	T-19C43	T-19F88
		400	225			T-19F83
T-19P56	750	600	225	T-19C36	T-19C43	T-19F88
T-19P57*	1000		125	T-75C51	T-75C51	T-19F78
		400	150			
T-19P58*	1000		200	T-19C35	T-19C42	T-19F90
		750	150	T-19C39	T-19C46	T-19F88
T-19P69	1000	750	300	T-19C36	T-19C43	T-19F90
T-19P71*	1250		125	T-19C39	T-19C46	T-19F90
		400	200	T-19C35	T-19C42	T-19F83
T-19P59	1250	1000	300	T-19C36	T-19C43	T-19F90
T-19P60	1500	1250	300	T-19C36	T-19C43	T-19F90
T-19P61	1750	1500	300	T-19C36	T-19C43	T-19F90
T-19P62	2000	1750	300	T-19C36	T-19C43	T-19F90
T-19P63	1250	1000	500	T-19C38	T-19C45	T-19F90
T-19P64	1500	1250	500	T-19C38	T-19C45	T-19F90
T-19P65	2500	2000	300	T-19C36	T-19C43	T-19F90
T-19P66	1750	1500	500	T-19C38	T-19C45	T-19F90
T-19P67	2000	1750	500	T-19C38	T-19C45	T-19F90
T-19P68	2500	2000	500	T-19C38	T-19C45	T-19F90

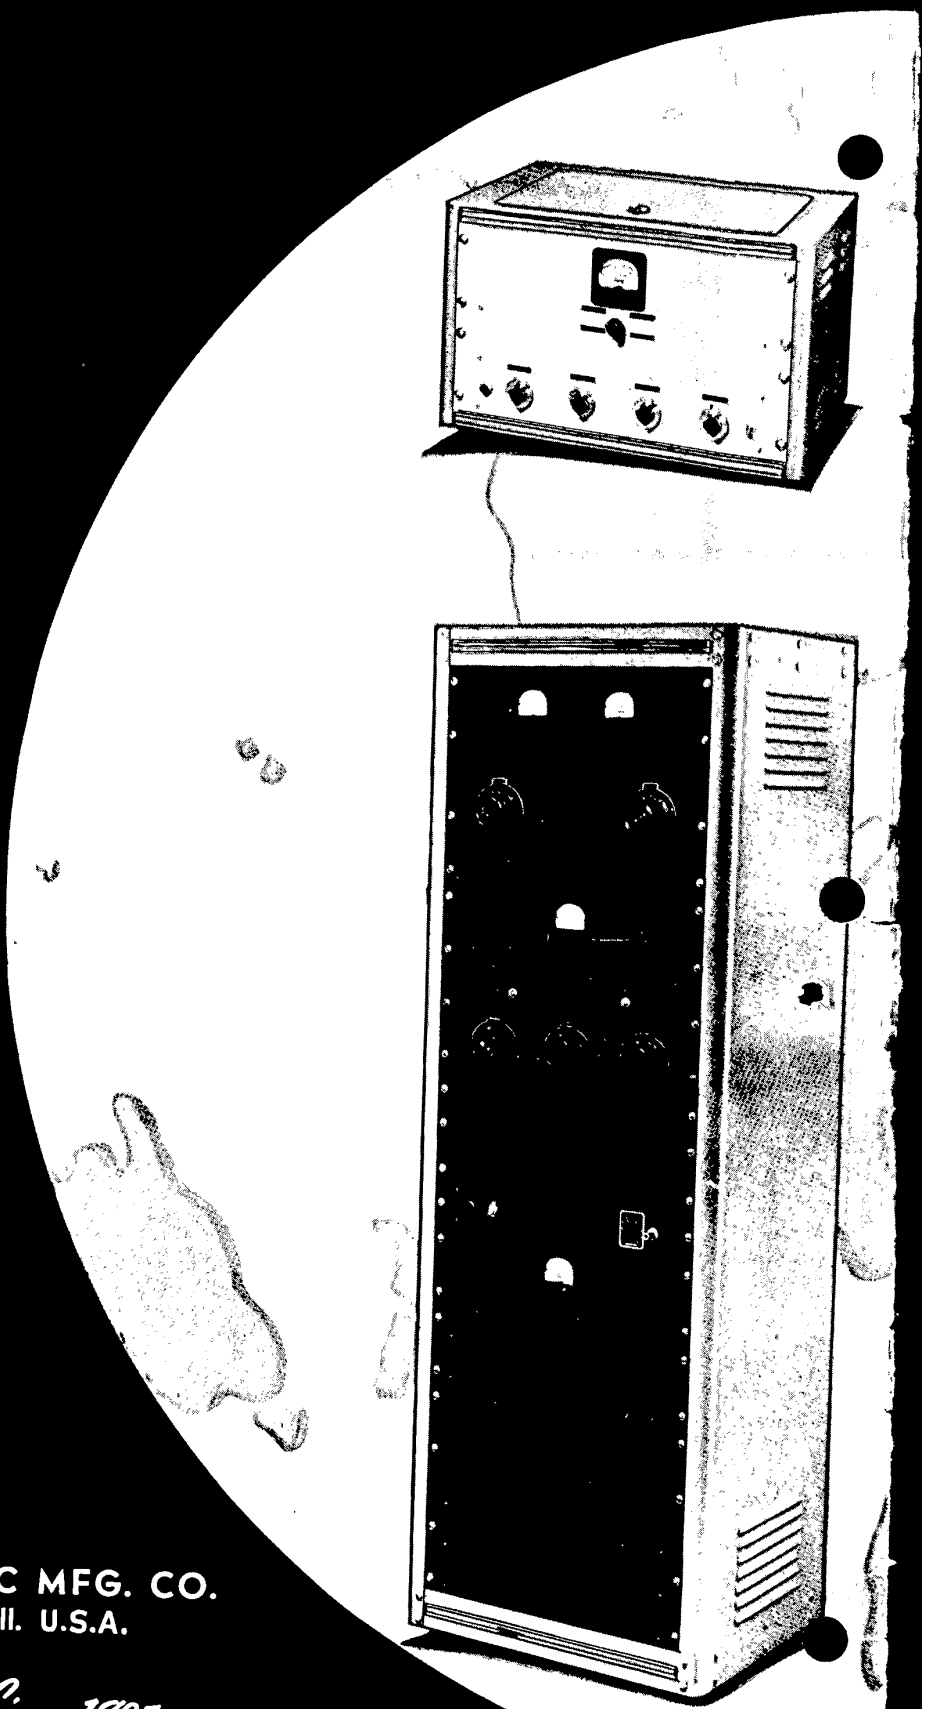

THORDARSON ELECTRIC MFG. CO.
500 W. Huron St. Chicago, Ill. U.S.A.

Transformer Specialists Since 1895

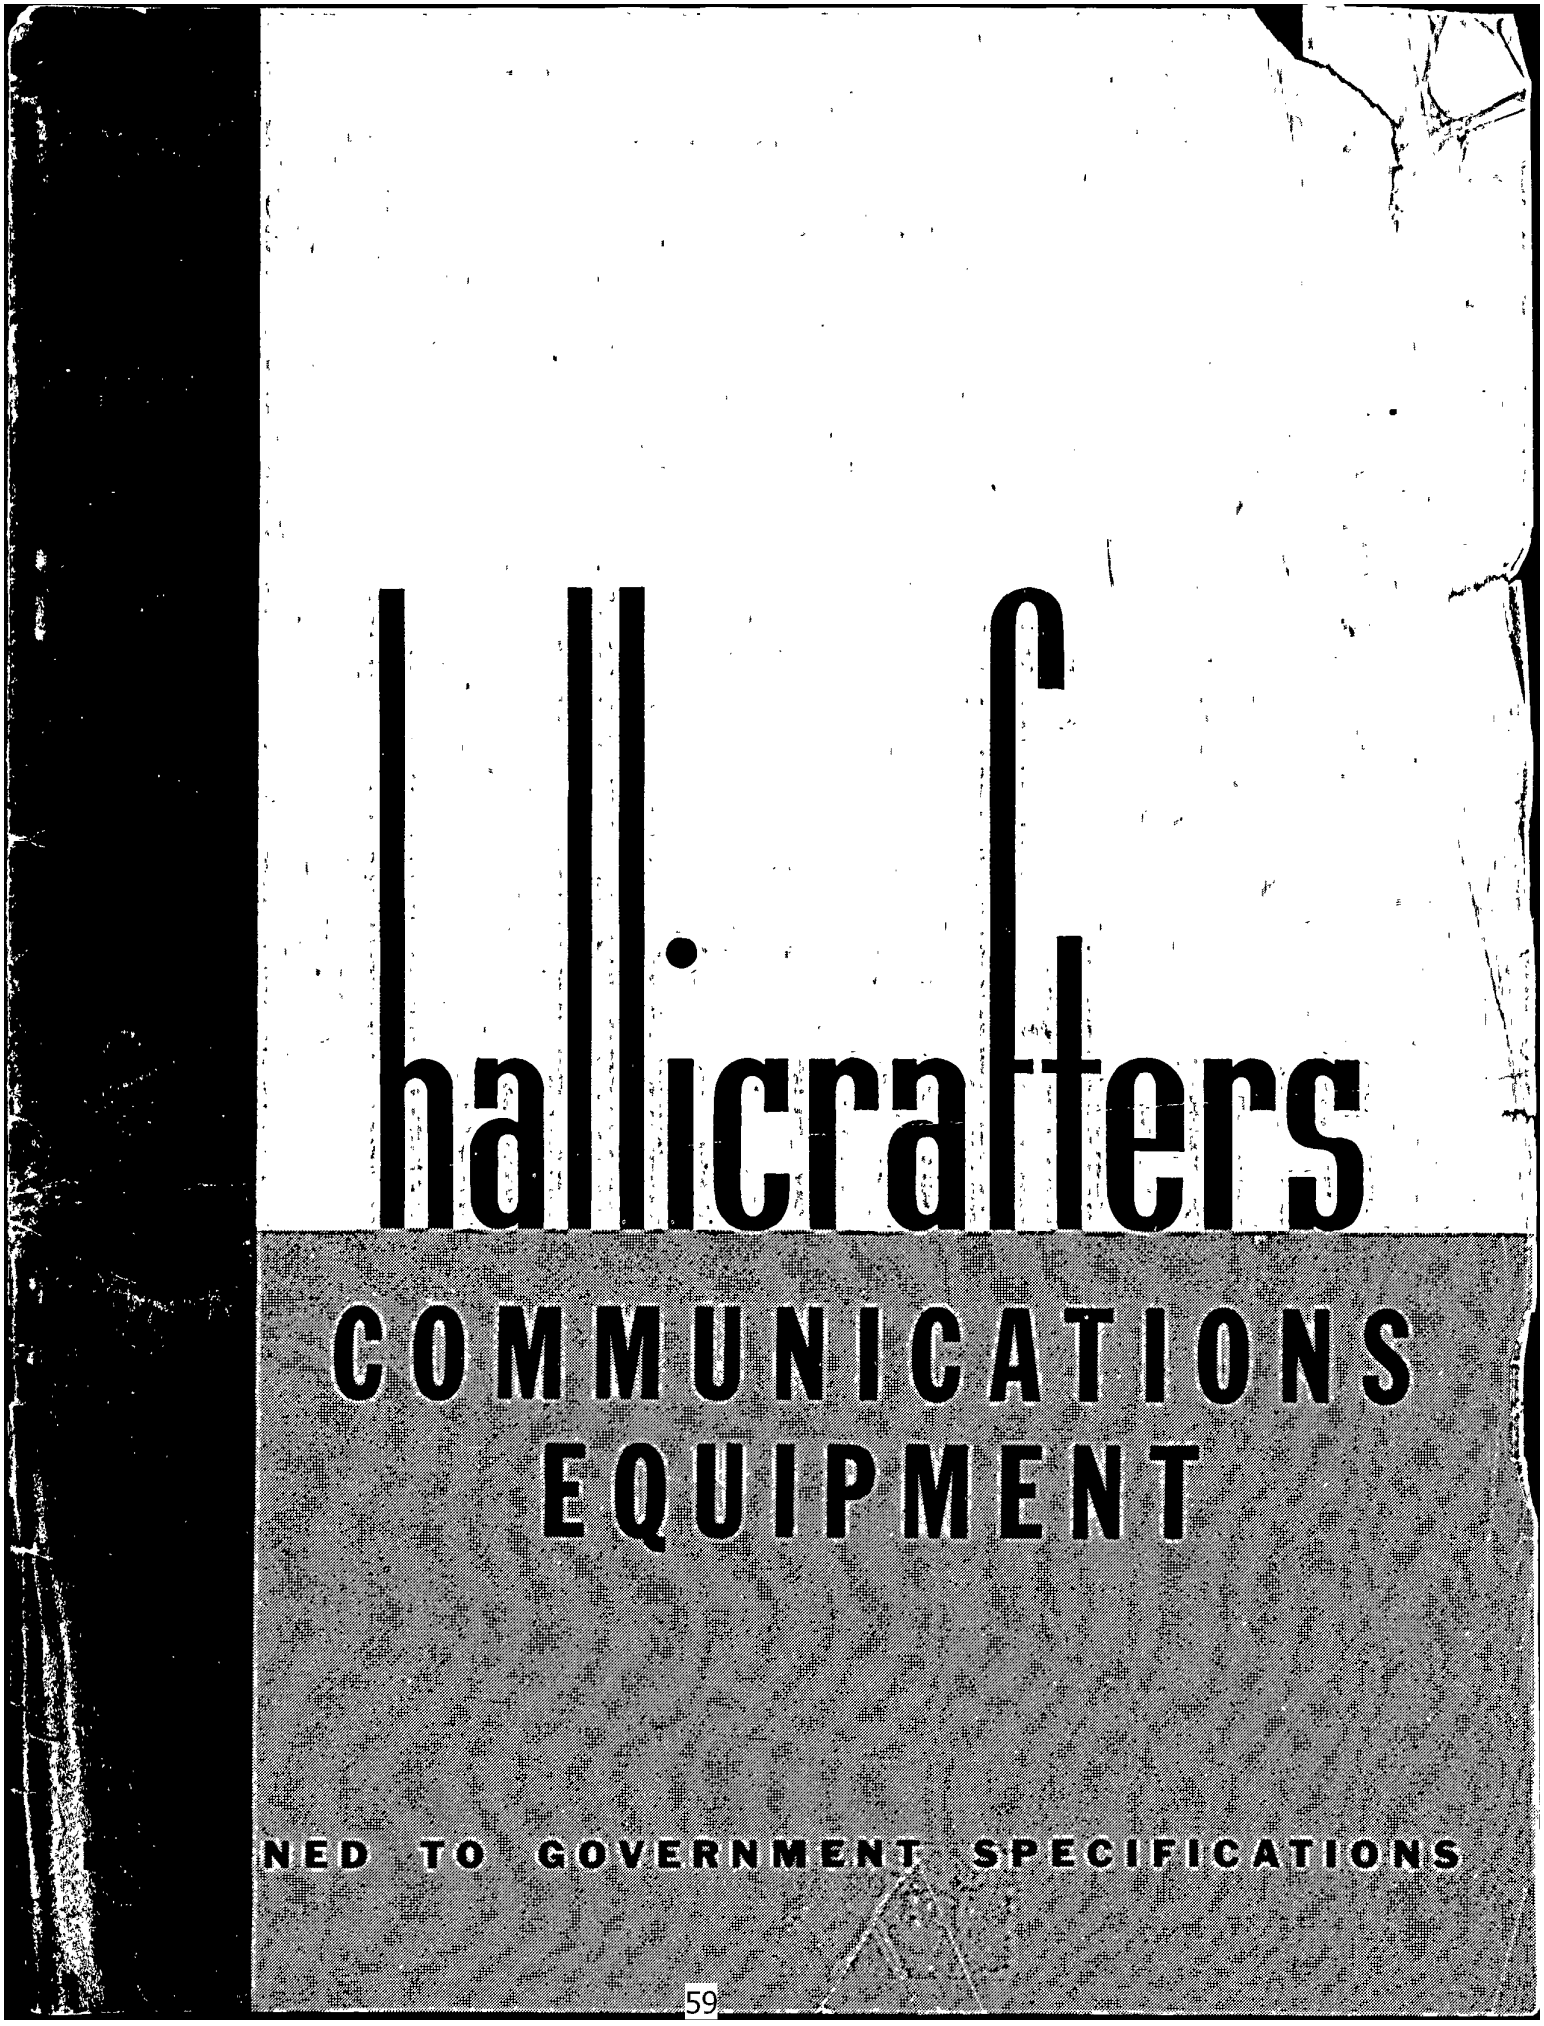
hallicrafters
COMMUNICATIONS
EQUIPMENT
NED TO GOVERNMENT SPECIFICATIONS

the hallicrafters inc.

New 1941 Super Skyrider SX-28

There is a definite reason for Hallicrafters supremacy in the amateur communications field. The same reason that made THE HALLICRAFTERS the "world's largest builders of amateur communications equipment"—that reason is top quality performance at lowered prices.

The new 1941 Super Skyrider Model SX-28 sets a new high in quality performance at a moderate price. This 15 tube, 6 band communications receiver delivers praiseworthy results no matter what the operating circumstance. Each control performs a definite function that contributes to the outstanding reception capabilities of the unit, and all the controls are conveniently arranged for effortless tuning. Model SX-28 has an image ratio of 45 to 1 at 28 mc.—350 to 1 at 14 mc., and a proportionately increasing ratio as the frequency is lowered. While the two RF stages are principally needed to obtain such image ratios, they also perform two other useful functions —more favorable signal noise ratio and increased selectivity. The IF Amplifier has been designed for permanency of adjustment under conditions of extreme changes in temperature and humidity as well as unusual mechanical vibration.

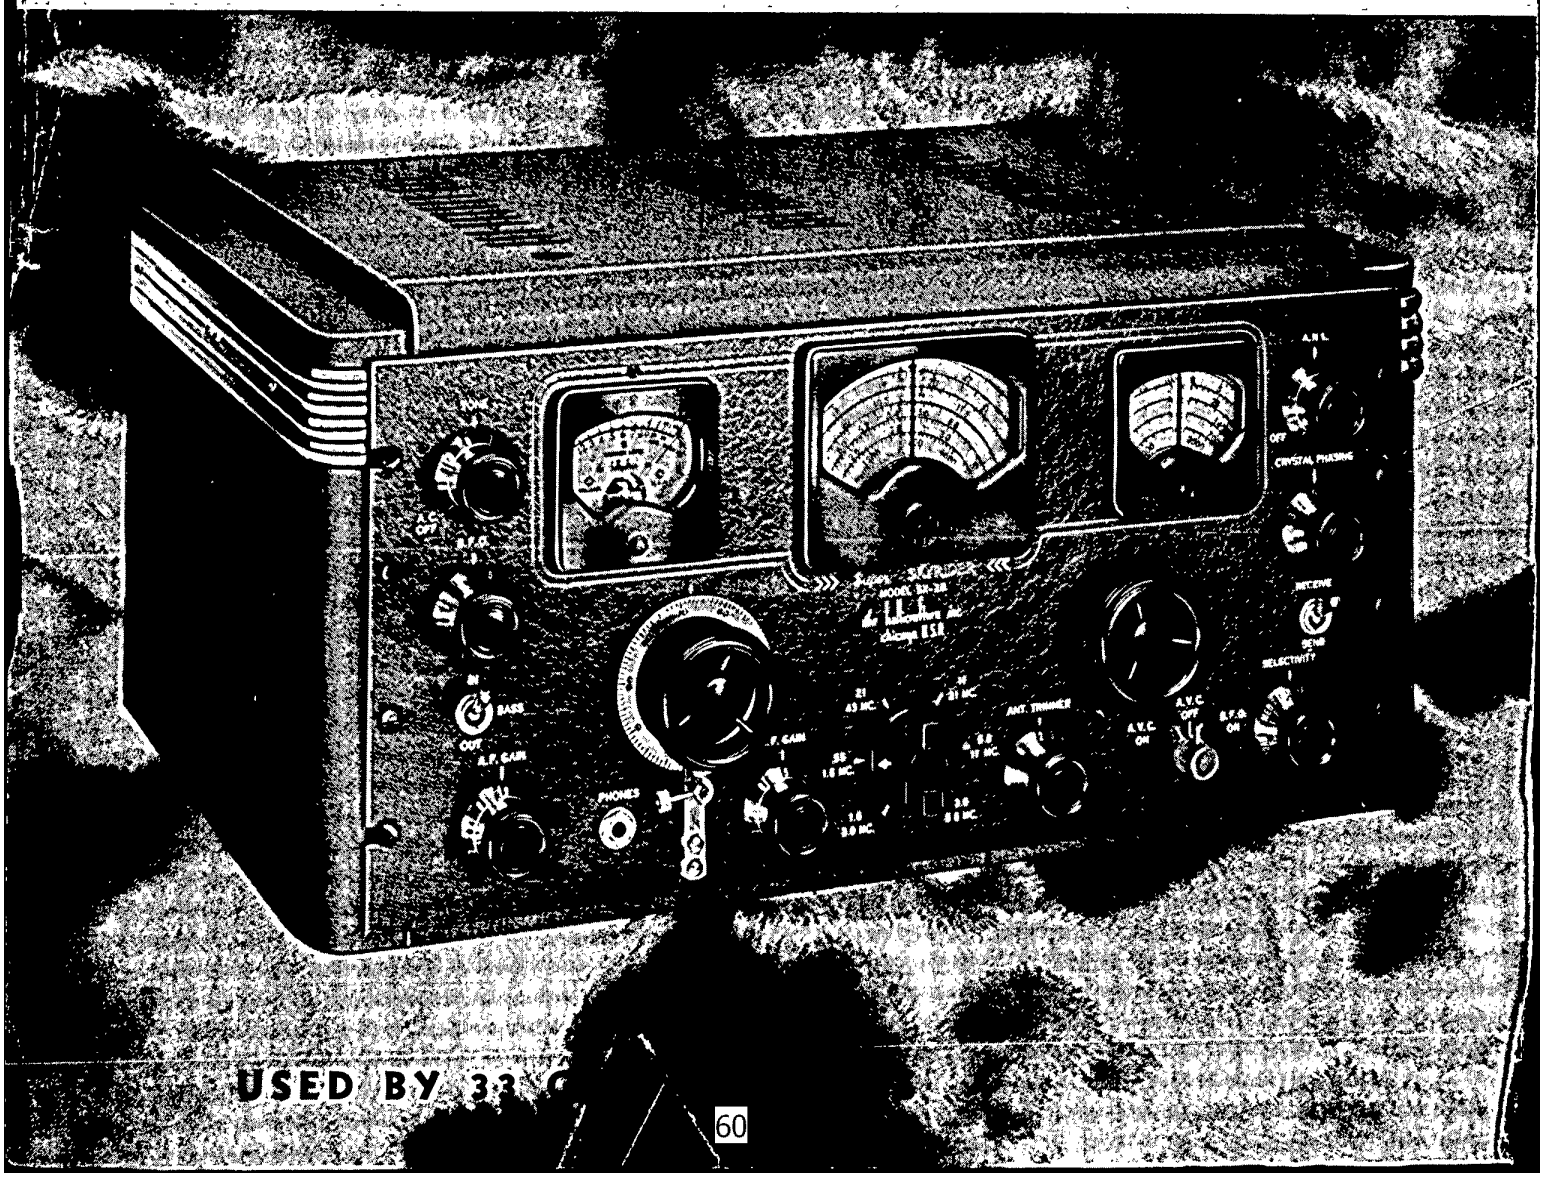

USED BY 33

the hallicrafters inc.

FEATURES OF THE SX-28

15 Tubes—Two Stages preselection—Calibrated band-spread inertia controlled—Micrometer scale tuning inertia controlled—Tone and AC On-Off—Beat Frequency Oscillator—AF Gain—RF Gain—crystal phasing—adjustable noise limiter—send-receive switch—AVC-BFO switch—Bass boost switch—Phono jack—80, 40, 20 and 10 meter amateur bands calibrated—Wide angle "S" meter—Band pass audio filter—Improved signal to image and noise ratio—Push-pull high fidelity, audio output—6 step wide range variable selectivity—Improved headphone output.

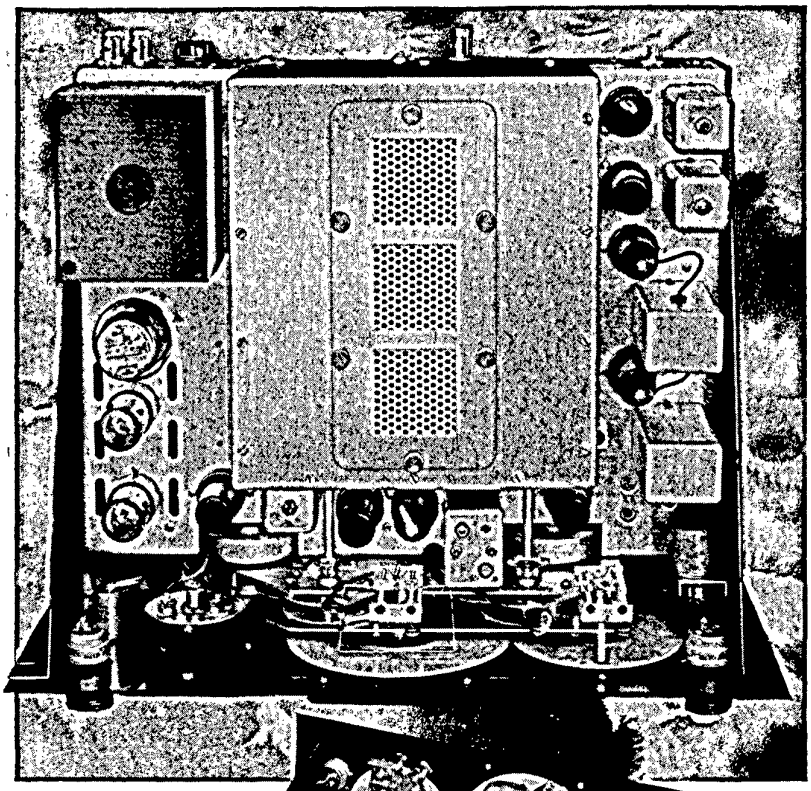

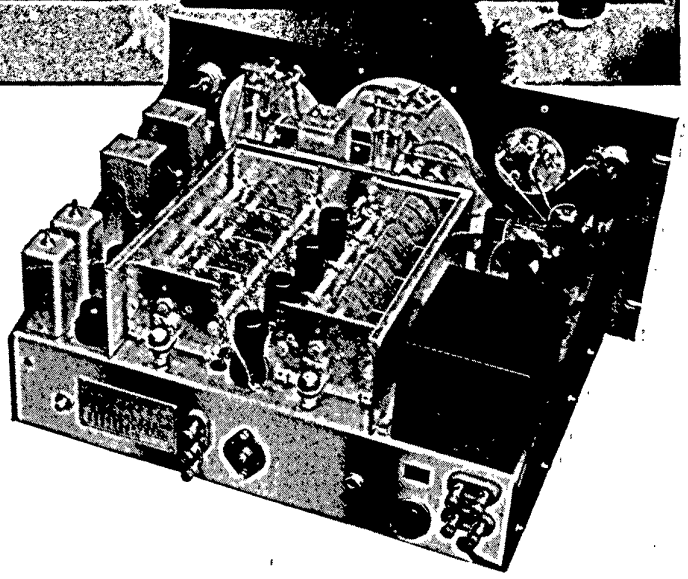

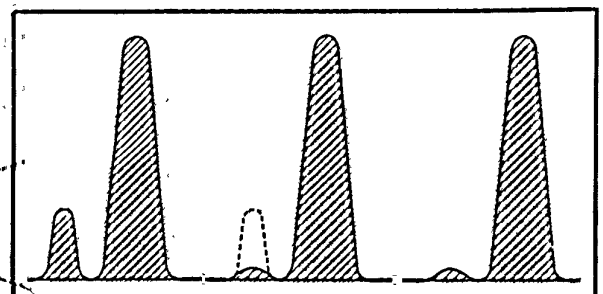

SINGLE SIGNAL ADJUSTMENT

With Selectivity Switch in XTAL Sharp position identify the weaker amplitude—Tune Receiver to the weaker.

Adjust phasing control carefully until this weaker amplitude is reduced to a minimum.

Retune Receiver to the stronger amplitude and then adjust pitch control until you get note most pleasing to copy.

It is extremely simple to attain single signal reception with the SX-28. First, turn on the BFO to the desired Beat Note and turn the selectivity switch to the XTAL SHARP position. Pick a good solid CW signal, preferably a commercial station because a commercial is likely to stay on long enough for you to complete the phasing adjustment for single signal reception.

You will find on tuning across this signal that it has two amplitudes. Tune first to the weaker of these two amplitudes. Now, turn the PHASING control until this weaker of the two amplitudes is reduced to a minimum. (If the weaker amplitude appears on the right the above procedure still holds.) Then tune to stronger of the two amplitudes and adjust the BFO control to a tone most pleasing to you. This adjustment for single signal selectivity will hold with no further adjustment unless you change the phasing control.

CRYSTAL FILTER CIRCUIT

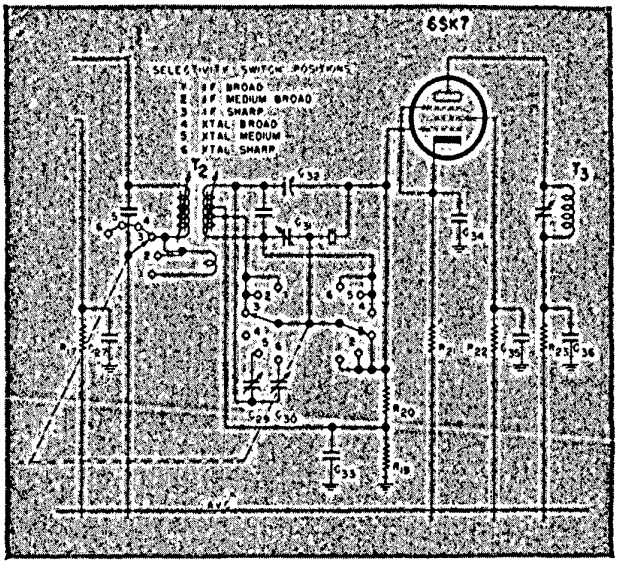

In positions 1, 2, 3 the crystal is short circuited. In position 4 the short across the crystal is opened and the iron core in the secondary of the transformer is adjusted for Broad Crystal Action and at this point is accurately tuned to the crystal frequency. Due to the close coupling of the secondary crystal, the sharply rising resonance curve of the crystal causes, in contrast, a sharply falling resonance curve in the secondary. The combined action of these two characteristics results in a relatively broad resonance curve for the CRYSTAL BROAD selectivity setting. In the MEDIUM CRYSTAL No. 5 position, C_{29} is adjusted for selectivity midway between the BROAD and CRYSTAL SHARP settings. In position 6, or CRYSTAL SHARP, the trimmer C_{30} is adjusted for the sharpest crystal action. Under this condition, the Secondary is slightly detuned from the resonant crystal frequency sufficiently so that its resonance curve is not greatly affected by the crystal but still coupled tightly enough so that it can transfer energy to the crystal circuit. When this point is reached it is indicated by a rise in the output. Two such points of increased output will normally occur—one for each adjustment of the secondary on either side of the resonant frequency of the crystal.

A.V.C. CURVE—AT 3 MC.

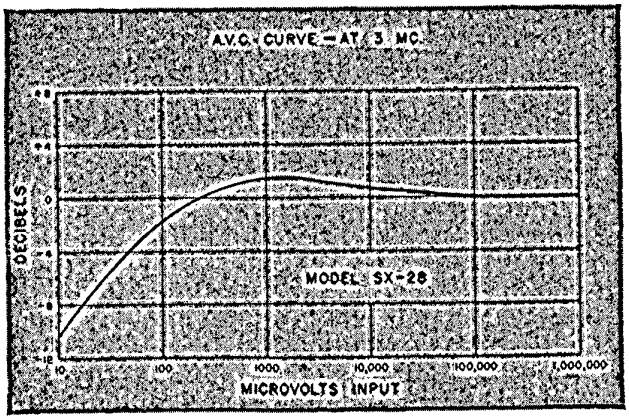

AVC ACTION

A double AVC system is used. The RF and mixer tubes are operated by the broadly tuned carrier coming through only three tuned IF circuits. The final signal, however, passes through six-tuned IF circuits. As a result, when the signal is slightly detuned, the receiver output has dropped considerably while the AVC action has dropped but very little. This results in a reduction of between-station noise and a more sharply defined aural tuning action.

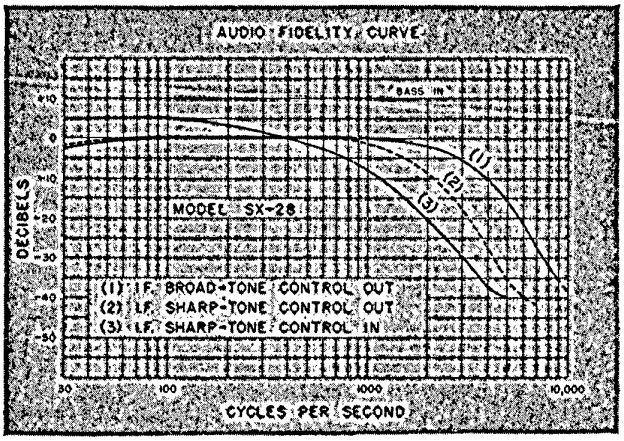

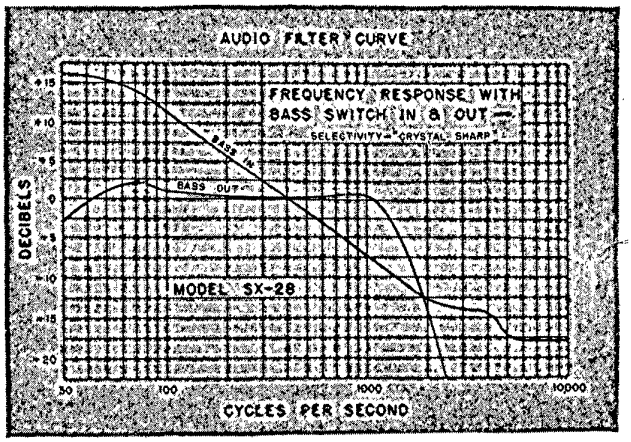

THE AUDIO AMPLIFIER

The second or output stage of the audio amplifier in the Model SX-28 receiver uses two 6V6GT tubes connected in push-pull. These tubes are driven by the 6SC7 double triode. One of the triode sections of the 6SC7 tube is used as the inverter to the 6V6GT tubes. A portion of the signal from the plate circuit of the first 6SC7 triode is fed to the grid of the other 6SC7 triode Section, thereby giving two output voltages in opposite phase suitable for exciting the push-pull 6V6GT output amplifier.

the hallicrafters inc.

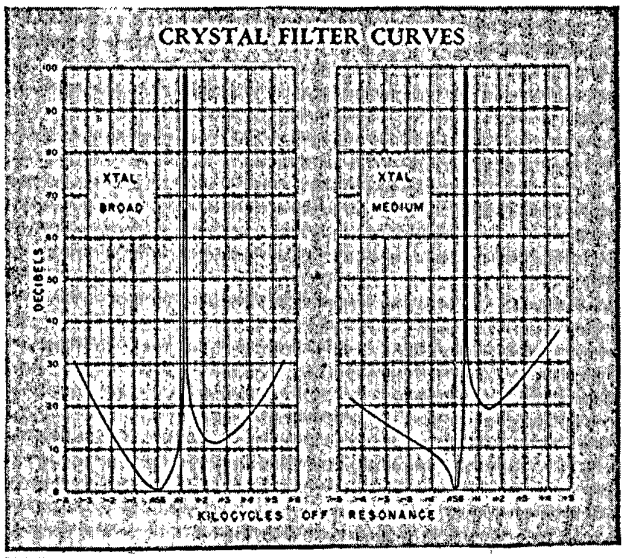

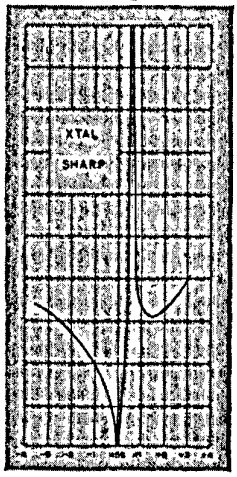

The CRYSTAL FILTER and holder are wired directly into the receiver and do not plug in as heretofore. In this manner exceptional crystal filter action is obtained because of the elimination of the capacity and losses of a socket. So mounting the crystal prevents possible change in polarity which would occur if the crystal were improperly inserted in the circuit. The size of the crystal has been carefully determined to allow the BROAD CRYSTAL position to tune as broadly as possible. The capacity of the crystal holder has been reduced to a minimum through the use of a specially designed polystyrene holder.

SELECTIVITY CURVE

will show, graphically, how the control trims the width of the signal so that what interference might be present in the signal's skirts or sidebands is effectively clipped off. Should an interfering signal lap over into the desired signal, adjustment of the SELECTIVITY control will reduce that interference.

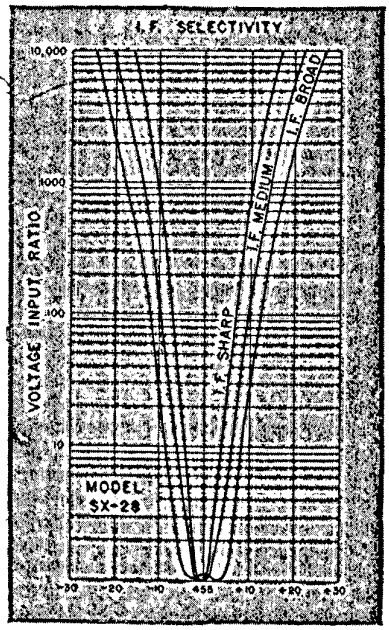

KILOCYCLES OFF RESONANCE

Please once more refer to the SELECTIVITY CURVE and recognize the fact that with the control set in the BROAD IF position, the signal proper and all its parts, which are combined in the side bands, or skirts, will be passed to the 2nd detector, audio amplifier, and then Speaker. As the selectivity of the receiver is increased from BROAD IF to XTAL SHARP, the gate, or admittance path, is so narrowed that only the main portion of the signal is allowed to pass through. This fact and its effect on the quality of reproduction is readily appreciated by listening to a signal and noting the reduction in higher frequency response in the more selective settings of the switch.

SPECIFICATIONS

Tubes:	
1—1853	1st RF Amplifier
1—6SK7	2nd RF Amplifier
1—6SA7	HF Oscillator
1—6SA7	1st Detector-Mixer
1—6L7	1st IF Amplifier-Noise Limiter
1—6SK7	2nd IF Amplifier
1—6B8	2nd Detector and S meter tube
1—6B8	AVC Amplifier
1—1853	Noise Amplifier
1—6H6	Noise Rectifier
1—6J5	Beat Oscillator
1—6SC7	1st Audio Amplifier
2—6V6GT	Push-Pull Output Amplifiers
1—5Z3	Rectifier

Power Consumption — at 117 volts — 60 cycles — 138 watts.

Power Consumption — DC operation — 18 amp. at 6 volts or 108 watts.

Power Output—8 watts undistorted.

Sensitivity—(for .05 watts output) Bands 1 to 5—2 MV and under; 6th band 4 MV.

	2x	1000x
Selectivity—IF broad (high fidelity)	12 kc	36 kc
IF Sharp	4.1 kc	22 kc

Frequency Range RF—Note: These are the actual frequencies covered corresponding to nominal figures indicated on the front panel.

550	to 1,620	kilocycles
1.5	to 3.1	megacycles
2.9	to 5.9	megacycles
5.75	to 11.5	megacycles
10.3	to 21.5	megacycles
20.4	to 42	megacycles

Frequency response AF—audio filter out Broad IF—tone control high—70 to 3000 cycles—2½ DB.

Speaker Output Impedances—5000 and 500 ohms

Intermediate Frequency—455 kc.

Table cabinet dimensions—20½" long x 10" high x 14¾" Deep.

Relay Rack dust cover dimensions—14¾" deep x 17⅜" long x 8¾" high.

Panel dimensions—19" x 8¾".

Chassis dimensions—17⅜" x 13½".

Weight—(unpacked)—75 lbs.—packed 87 lbs.

The MODEL SX-28 Receiver with crystal and tubes, less speaker
(SKYER) NET..... **$159.50**

Hallicrafters Jensen bass-reflex enclosure including 12" speaker 30" high—16" deep—22½" wide—Model R12 (SPTWE). **$29.50**

Hallicrafters Jensen bass-reflex enclosure 8" speaker 23½" high—1¼" deep—17½" wide—Model R8 (SPEIG)..... **$19.50**

the hallicrafters inc.

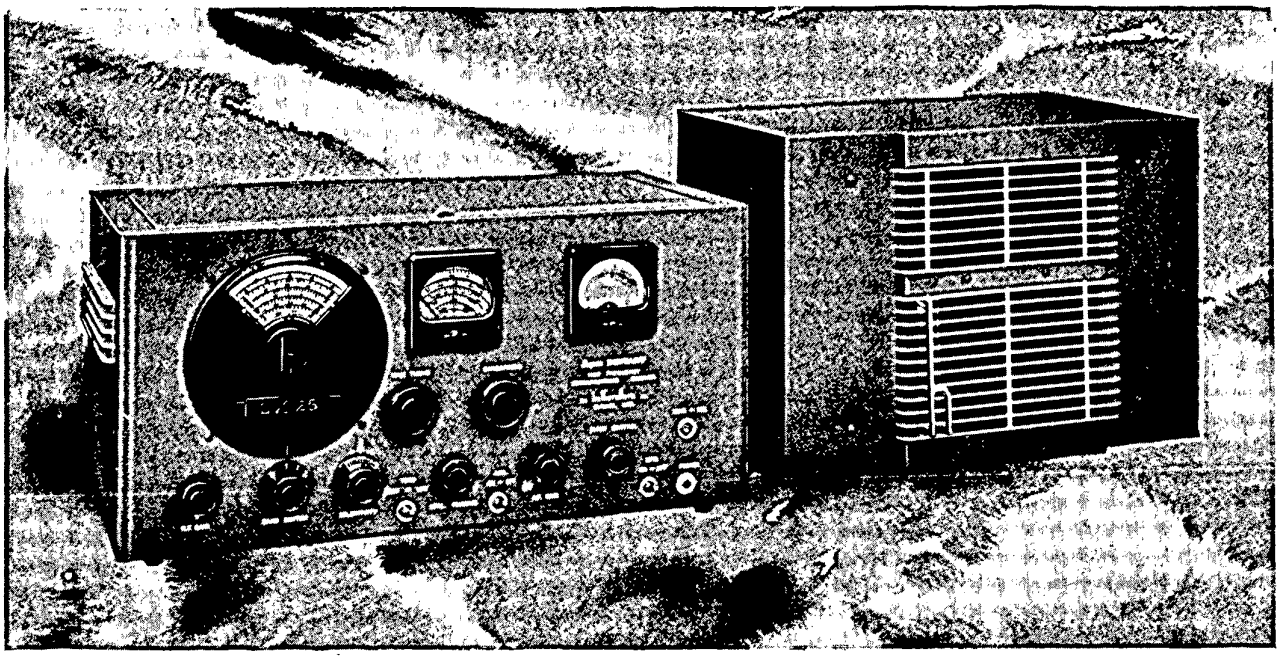

SX-25

Embodying every worthwhile advancement that has been made in the communications field, the engineers of the Hallicrafters assure the user of the SX-25 the complete answer to good reception requirements.

The SX-25 tunes from 540 kc. to 42 mc. in 4 bands. The frequency coverage per band is as follows: Band 1—540 kc. to 1,700 kc.: Band 2—1.7 mc. to 5.1 mc.: Band 3—5.0 mc. to 15.7 mc.: Band 4—15.2 mc. to 42 mc.

SPECIFICATIONS OF THE SX-25

Twelve tubes—2 stages of preselection—Separate calibrated bandspread dial for the 10, 20, 40, and 80 meter amateur bands provides frequency meter tuning—Compensation in oscillator circuit for frequency stability—Automatic noise limiter—Six-step variable selectivity covering wide range from high fidelity to extreme CW crystal—S meter calibrated in "S" and "DB" units—Push-pull output stage furnishes 8 watts of audio—Front panel controls: RF Gain, Selectivity Switch, Crystal Phasing, Audio Gain, Pitch Control, Main Tuning Control, Bandspread Tuning Control, ANL Switch, Hi-lo Tone, Send-Receive Switch and BFO Switch. External provision for: Break-in Relay; Headphones: 5000 or 500 ohm output: Single Wire or Doublet Antenna—Laboratory checked, piezo quartz crystal included as standard equipment. Ten-inch heavy duty PM dynamic speaker in matching metal cabinet included as standard equipment—Dimensions of receiver cabinet only: 19½" long, 9⅛" high, 11⅛" deep—110 volt 50-60 cycle AC operation, DC operation socket provided for battery or vibrapack.

COMPLETE WITH SPEAKER, CRYSTAL AND TUBES $99.50

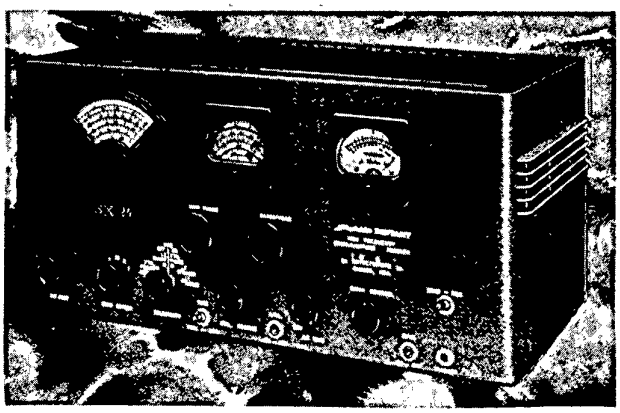

SX-24

The Model SX-24 represents the best value in the communications field. A 9 tube, 4 band receiver with a frequency range of from 540 kc. to 43.5 mc. as follows: Band 1—540 kc. to 1.730 kc.: Band 2—1.7 mc. to 5.1 mc.: Band 3—5.0 mc. to 15.7 mc.: Band 4—15.2 mc. to 43.5 mc.

SPECIFICATIONS

Controls are: RF Gain, Band Switch, Selectivity AVC, Main Tuning, Tone, Crystal Phasing, Band Spread, ANL, AF Gain, Pitch Control, BFO OFF-ON, and Send Receive. Frequency stability throughout a wide range of line-voltage humidity and temperature variations. One stage of preselection. Single-signal crystal filter standard equipment. DC operation socket—battery or vibrapack. Complete with 9 tubes and crystal (no speaker) (SKYFY)..... **$69.50**

PM-23 DYNAMIC SPEAKER

A 5000 ohm ten inch PM Dynamic speaker with transformer housed in a crackle finish battleship gray sturdily constructed cabinet. Shipping weight 22 pounds.
Jensen-Hallicrafters price (SKYVO)..... **$12.00**

the hallicrafters inc.

Frequency Modulation / Amplitude Modulation

(MODEL S-27)

The first general-coverage U. H. F. communications receiver to incorporate Frequency Modulation reception. Amplitude modulation has been the accepted and usual form of impressing intelligence upon the transmitted radio signal. When a radio signal is amplitude modulated, the modulating or audio signal—speech or music—is combined with the radio signal which causes it to alternately increase and decrease in AMPLITUDE, these variations taking place at a frequency, or rate, determined by the frequency of the modulating sound.

By direct contrast, a frequency modulated signal consists of a carrier which remains CONSTANT IN AMPLITUDE. When modulation takes place under this system the frequency, and not the amplitude, of the radiated signal is varied—the rate, or speed, of variation being determined by the frequency of the audio modulating signal. In addition, the stronger the audio modulating signal the greater will be the change in frequency of the radio signal. Under such an arrangement the band width (that through which the carrier of the FM signal is swing) is determined by the maximum shift in frequency which is occasioned by the amplitude, but not the frequency of the modulating signal.

In general, a frequency-modulation receiver has practically all the same components that an amplitude modulation receiver has with the exception of the detection systems.

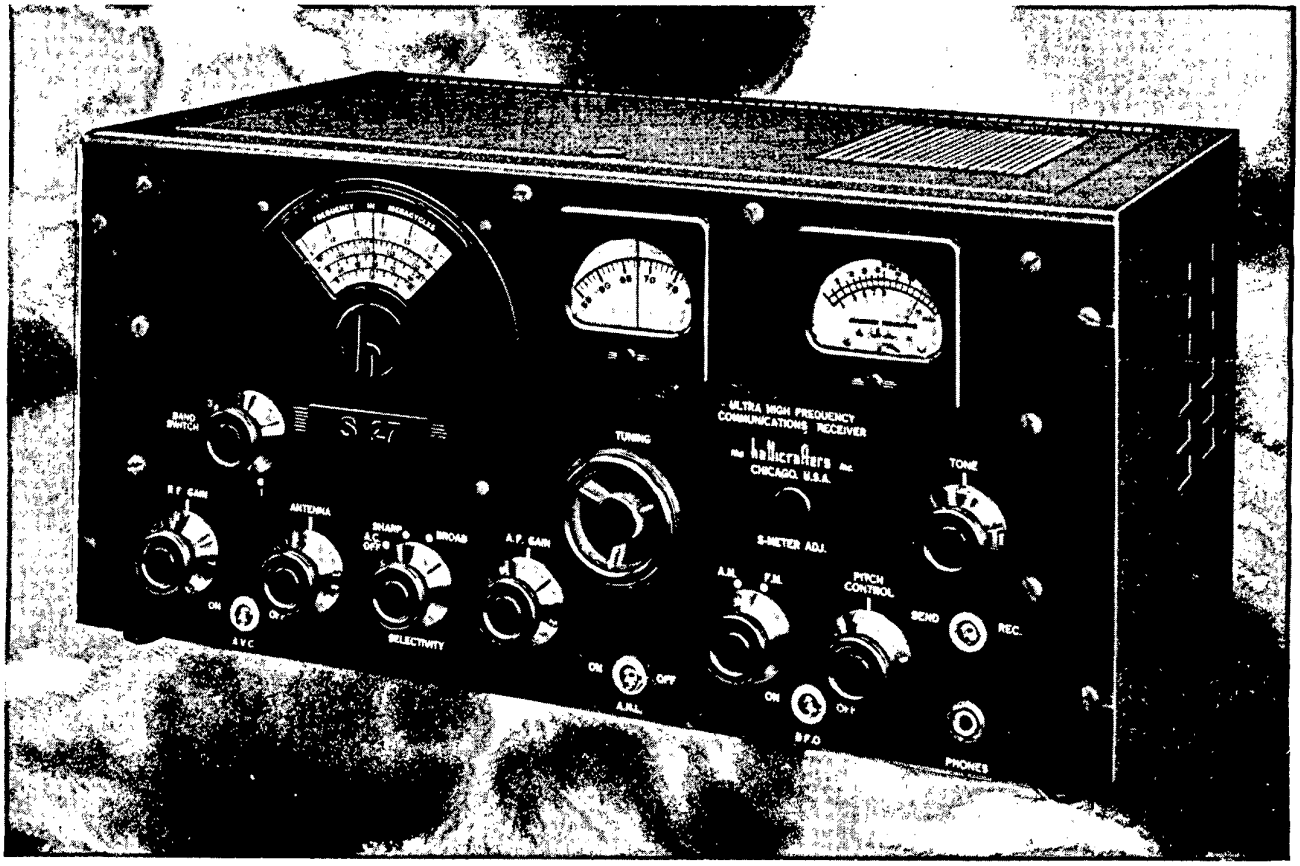

SPECIFICATIONS

This Frequency Modulation communications receiver covers 3 bands: 27 to 46 mc: 45 to 84 mc: 81 to 145 mc. Switch changing from FM to AM reception. Acorn tubes in RF and converter system. High gain 1852 tubes in Iron Core IF stages. Beam power tubes in AF amplifier. Controls are: RF gain control, Band switch, Antenna trimmer, IF selectivity control and power switch, Volume control, Pitch control, Tone control, S-meter adjustment, AVC on-off switch, Send-receive switch, phone jack, amplitude of frequency modulation switch. 15 tubes. 110 volt 50-60 cycle AC Dimensions: 19" long, 9" high, 14" deep. Shipping weight 75 lbs.

MODEL S27 Am/Fm Receiver complete with tubes (FREMO) **$175.00**

the hallicrafters inc.

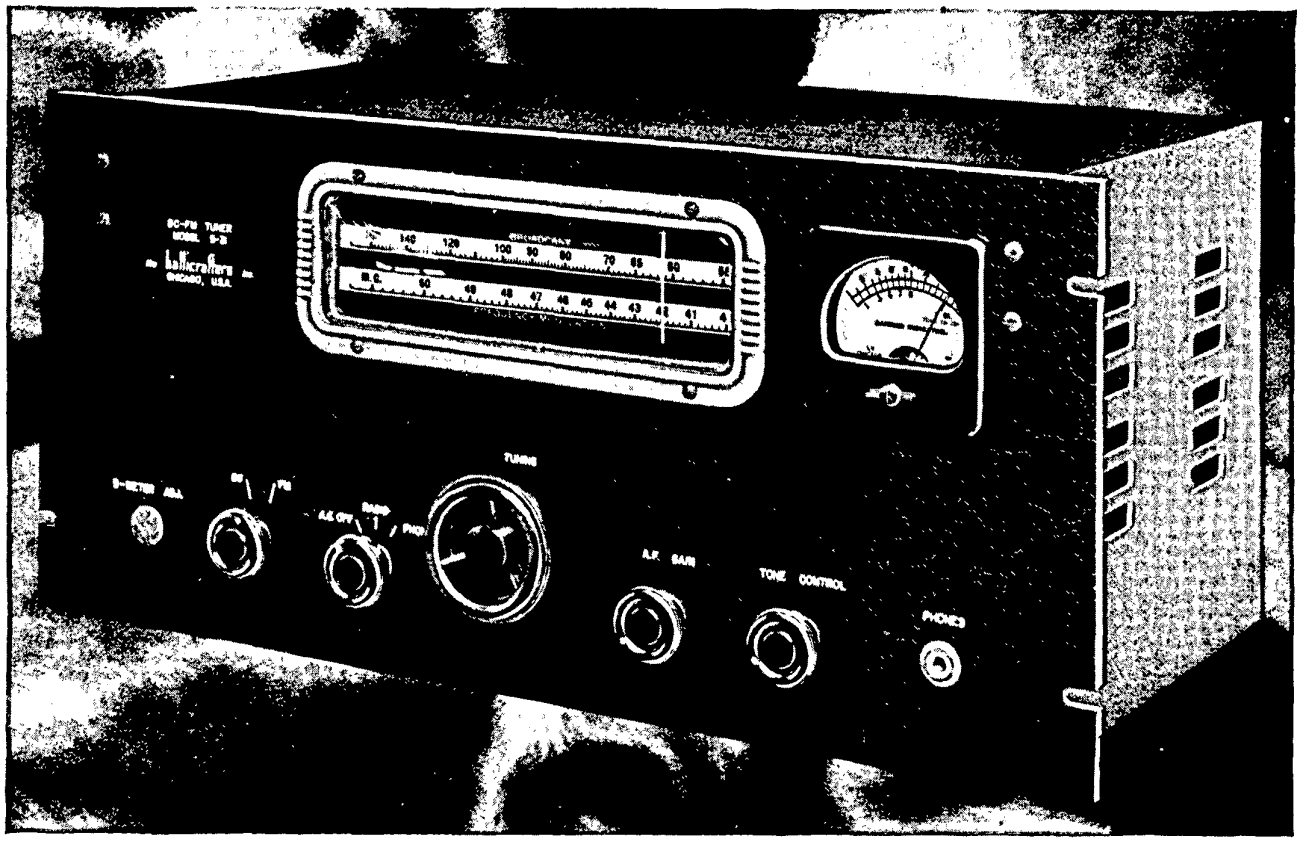

FM/AM Model S-31

High Fidelity Tuner for Frequency Modulation and Amplitude Modulated Broadcast Reception.

Now you can hear music actually as the band plays it, then you will know why frequency modulation is becoming so popular. The noise and static-free reception obtained is much superior to that of the old accepted standard of amplitude modulation.

The No. 1 band covers all frequencies used by amplitude modulated broadcast stations. The dial reads kilocycles by the addition of a zero to the numbers shown. Thus, 100 would be 1000 kilocycles.

The No. 2 band covers frequencies used by high fidelity frequency modulated broadcast stations. The dial is calibrated in megacycles.

Fundamentally, amplitude modulation (AM) consists of adding and subtracting power from a carrier in accordance with the modulating voice or music. With frequency modulation (FM), however, the carrier is kept constant in amplitude and is shifted back and forth in frequency in accordance with modulation. The circuits involved in the reception of the two types are much different—usually requiring two separate receivers. The Model S-31 tuner combines both circuits and changes from FM to AM with the bandswitch.

To appreciate the full capabilities of this tuner a high fidelity audio system should be incorporated. A high fidelity audio system consists of not only a high fidelity amplifier but also a high fidelity speaker system.

SPECIFICATIONS

8 tubes—Frequency range, band one: 540 to 1650kc., band two: 40 to 51mc.—Power output 130 milliwatts undistorted—Power consumption 120 watts—Controls, Band switch, Phone switch, Main tuning, Audio gain, Tone Control, "S" Meter adjustment—Operates on 115-125 volts, 60 cycles AC.

Model S31 Tuner. Complete with 19"x8¾" rack panel, metal cabinet and tubes.
(TUNER)..... **$69.50**

Model S31A. High fidelity, 25 watt amplifier, complete with cabinet and tubes.
(TRAAM)..... **$49.50**

the hallicrafters inc.

THE SKYRIDER (Model SX-23)

We have achieved in the SKYRIDER model SX-23, new standards of communications receiver performance—in selectivity, low image ratio, improved crystal action, and numerous other qualifications which have been prerequisites of the receiver you have wanted.

The SX-23 is a truly fine example of outstanding engineering design, offering for the first time compensated frequency stability, eliminating drift. The main feature of the new band-spread system is its reset accuracy. There is no bandset dial to fuss with. The same station always comes in at the same place on the dial. The band indicator harmonizes with the S-DB meter, and is direct reading. Tubes—3-6SK7, 1-6SA7, 2-6SJ7, 1-6SQ7, 1-6B8, 1-6H6, 1-6F6G, 1-80. Controls, RF gain, pitch control, tone control, selectivity switch, ANL switch, band switch, send-receive switch, audio gain, crystal phasing control, main tuning control and phone jack. Cabinet size—19" long, 9¼" high, 12½" deep. For operation from 110 volt 50-60 cycle AC. For 110 volt AC operation from 6 volts DC use No. 302 Electronic Converter.

The SKYRIDER 23 (Model SX-23)—Complete with tubes and crystal. Shipping weight 56 lbs. **$115.00**

The SKYRIDER 23 (Model SX-23)—Complete with tubes, crystal, 10" PM 23 Speaker **$127.00**

Extra for Univ. 110-250 volts, 25-60 cycles **5.00**

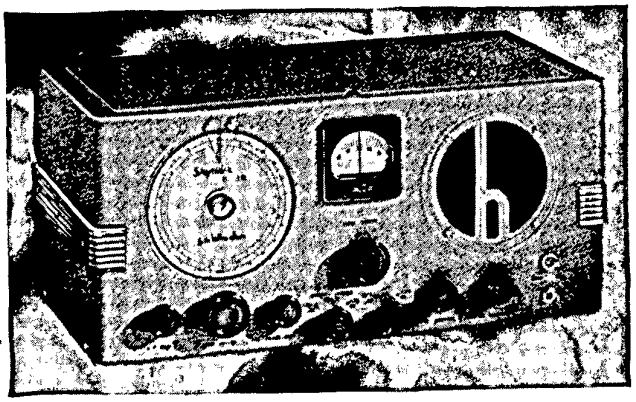

FEATURES

8 bandswitch position. Bands 1-2-3-4 cover 545 kc. to 44 mc. continuously. Bands 5-6-7-8 are pre-set bandspread for the amateur 10, 20, 40 and 80 meter bands. —Six-step variable selectivity—Improved noise limiter circuit—Frequency stability, both from temperature humidity effects and from line voltage variations.—"Venetian Blind" dial, band indicator and S-DB meter —Completely shielded crystal circuit and phasing control—permeability tuned coil—with separate shield compartment for crystal.

THE SKYRIDER 5-10 (Model S-21)

The Skyrider "5-10" is a two band, 8 tube superheterodyne receiver designed to give the maximum in performance throughout its ultra high frequency tuning range.

Covers the radio spectrum from 27mc. to 68mc. in two bands with a degree of sensitivity and selectivity that is unparalleled. Band 1—27mc. to 42mc. Band 2—40mc. to 68mc. Sensitivity of BETTER THAN 1 MICROVOLT. Socket on chassis for 6 volt mobile operation with the addition of a vibrapack or other suitable power supply. IF amplification—1600kc. Tubes used—one each 1852, 6L7, 6J5, 6K7, 6P7G, 6Q7G, 6F6G, 6H6, 80. Built-in speaker.

Terminals are provided for an SM21 meter. For operation from 110 volts. 50-60 cycles, AC. Dimensions: 18½" x 9¼" x 8½" high.

The SKYRIDER 5-10 (Model S-21) — Complete with tubes and speaker. Shipping weight 34 lbs. (SKYRI) **$69.00**

SM-21 carrier level meter **10.00**

For 110 to 250 volt operation, 25 to 60 cycles, additional cost **5.00**

the hallicrafters inc.

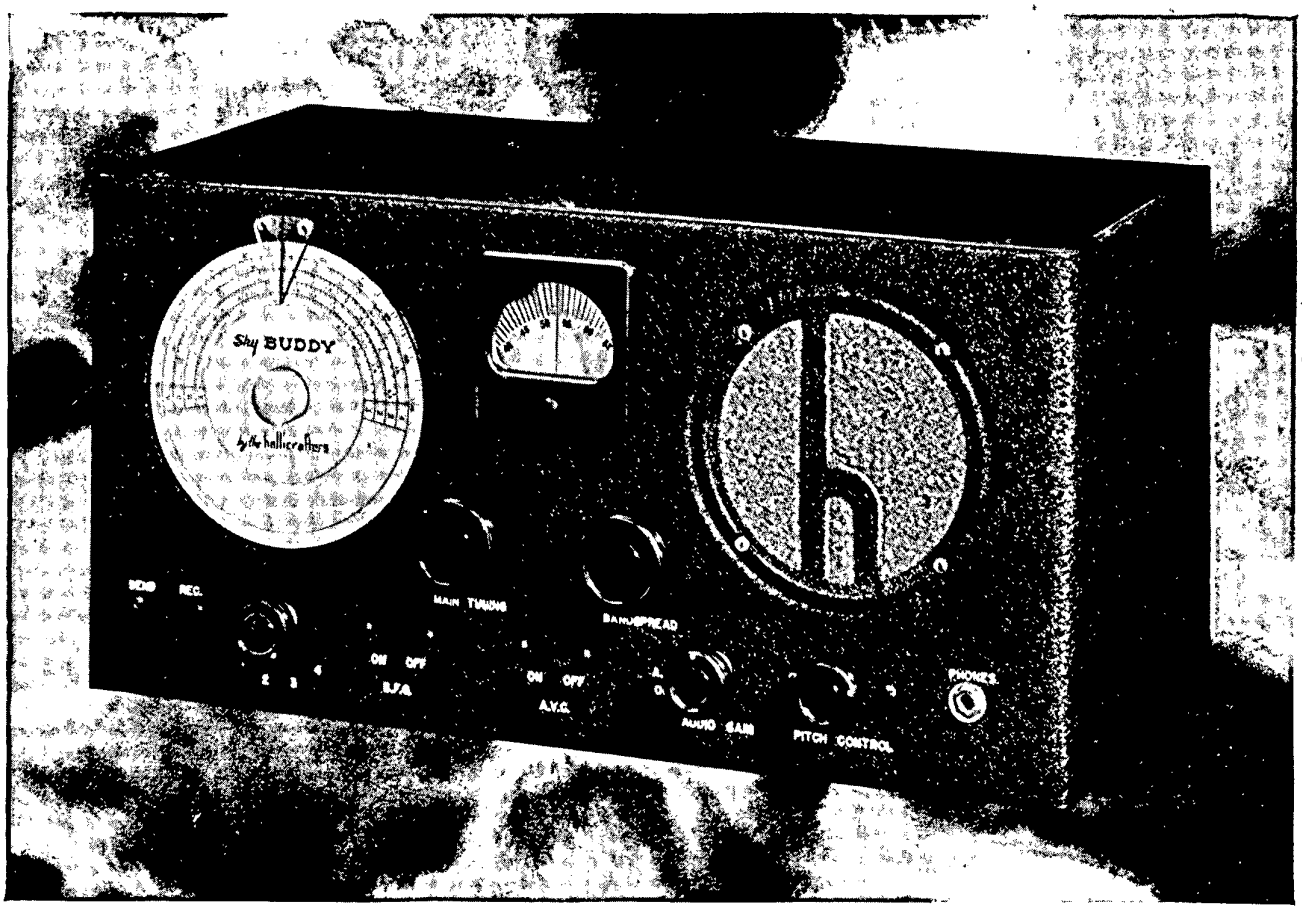

The Sky Buddy (S-19R)

The Hallicrafter engineers designed the Sky Buddy with the thought of producing an amateur receiver that could be sold at a moderate price yet produce superior performance for that type of receiver. The Sky Buddy covers everything on the air from 44mc. to 545kc., including the 10, 20, 40, 80 and 160 meter amateur bands. It now employs the same electrical bandspread system used in the higher priced Hallicrafter models. In no other similar receiver but the Sky Buddy can be found such extremely smooth and satisfactory electrical bandspread action. The stator plates are an integral part of the main condenser and the separate rotor sections are driven by a gearless mechanism through the separate bandspread knob. The Sky Buddy is equipped with conveniently arranged controls enabling the operator to realize the maximum in performance.

Read and check all the outstanding features and carefully compare the Sky Buddy with communication receivers selling at anywhere near this moderate price. When you operate, and know the exceptional sensitivity and selectivity of this unit you too will agree to its superior performance, and amazing ease of operation even under the most trying conditions.

SPECIFICATIONS

- Continuous Coverage, 44MC to 545KC.
- 10 Meter Band with uniform Sensitivity over the Entire Band.
- Four Bands.
- Electrical Band Spread.
- Illuminated Band Spread Scale Covering 360°.
- Built-in 5" Dynamic Speaker with Floating Rubber Supports.
- Beat Frequency Oscillator.
- Built-in Line Filter.
- Six Tubes with 8 Tube Functions.
- 6K8 Converter Tube Uses Separate Filter Supply for Greater Stability.
- Band Switch.
- AVC Switch.
- Send-Receive Switch.
- Baked Black Crackle Cabinet 17½" x 8½" x 8½".

Amateurs Net Price (SKYBU)..... **$29.50**

the hallicrafters inc.

THE 1941 SKY CHAMPION

We believe that, without exception, the new 1941 Sky Champion Model S-20R, represents the best value ever offered in the communication field. This 9 Tube 4 band receiver tunes from 540kc. to 44mc.; Band one 540kc. to 1,770kc. Band two 1.72 mc. to 5.4 mc. Band three 5.3 mc. to 15.7 mc. Band four 15.2 mc. to 44 mc.

Has all the essential controls for good amateur reception as follows: RF gain, four position Band Switch, AVC switch, Main Tuning, BFO switch, send-receive switch, Audio Gain and pitch control. The tube line-up is as follows: 6SK7 RF amplifier, 6K8 first detector-mixer H.F. Oscillator, 6SK7 first IF Amplifier, 6SK7 second IF Amplifier, 6SQ7 second detector, AVC first stage of audio, 6F6G second audio output stage, 6H6 automatic noise limiter, 6J5GT beat frequency oscillator, 80 rectifier.

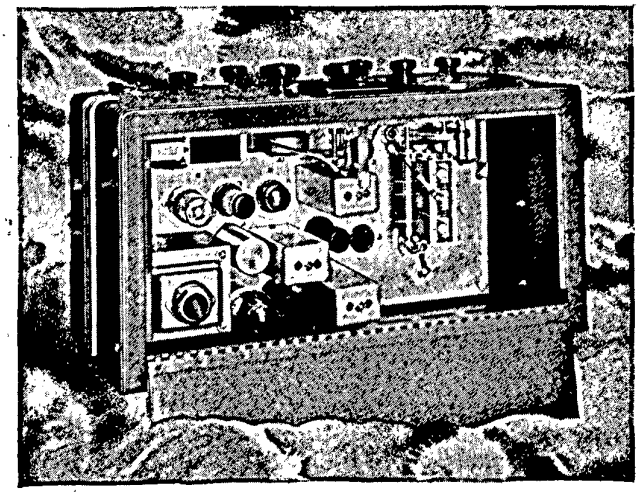

SPECIFICATIONS

9 tube, complete coverage (545kc. to 44mc.) in four bands.
Automatic noise limiter.
AVC switch.
Standby switch.
Inertia bandspread tuning.
Separate electrical bandspread.
Beat frequency oscillator.
Battery-vibrapack, DC operation socket.
Dimensions 18½" long, 8½" high, 9⅜" deep.

The Sky Champion (model S-20R). Shipping weight 32 lbs. (SKYCN)..... **$49.50**

Extra for Univ. 110-250 volts, 25-60 cycles..... **5.00**

SM-20R Carrier level meter..... **10.00**

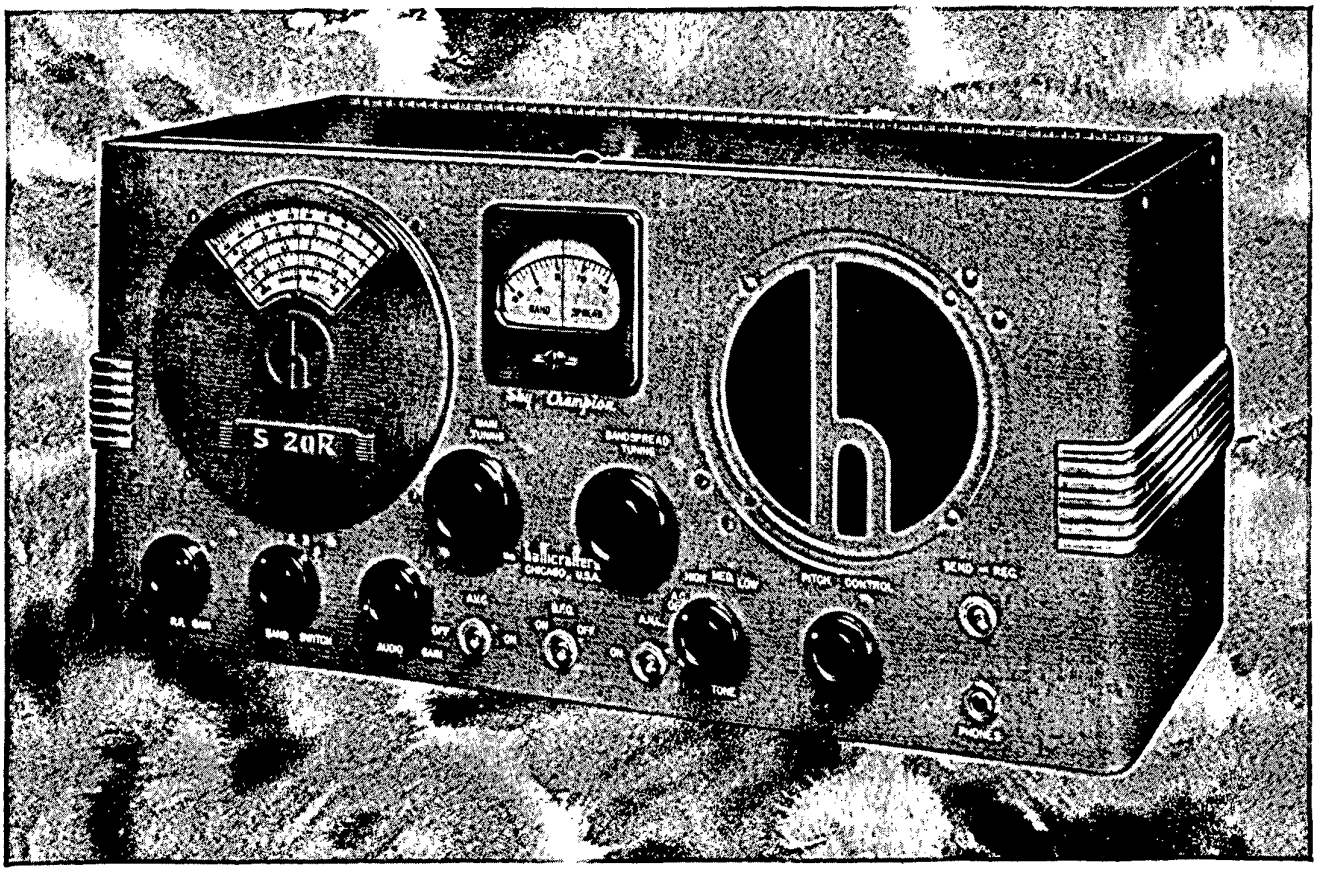

the hallicrafters, inc.

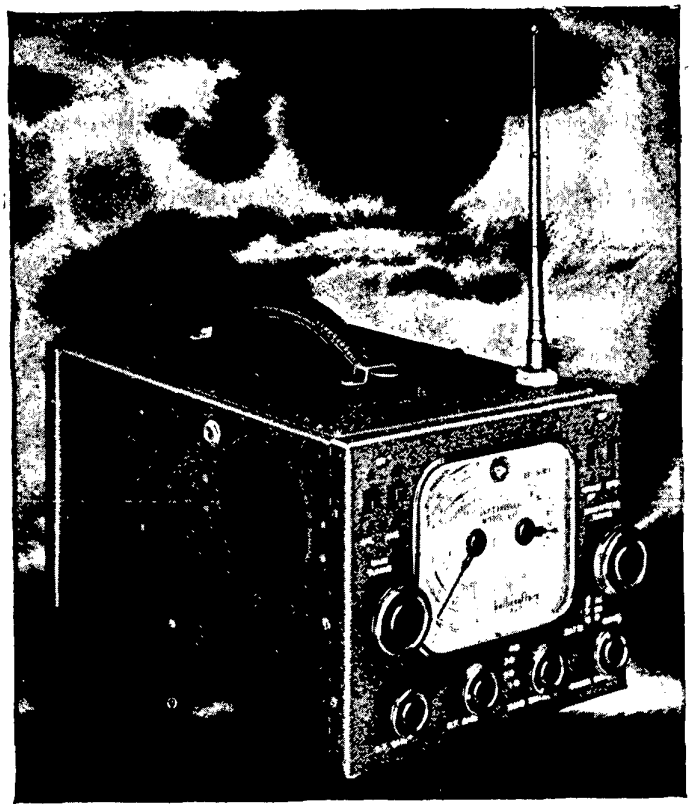

THE SKY TRAVELER (Model S-29)

A portable designed to communications receiver tolerances. Take it with you wherever you go or, use it at home. The Sky Traveler is truly a universal receiver—operates on either 110 volt AC or DC or from its self-contained batteries. Mounted in an attractive black crackle finished aluminum cabinet with rounded corners.

Frequency coverage from 542kc. to 30.5mc. (553 to 9.85 meters) on four bands. Self-contained antenna with high gain coupling circuit provides truly remarkable reception throughout its tuning range.

SPECIFICATIONS

FEATURES:

1—Operates on either 110/125 volts AC or DC and in addition from its self-contained batteries.
2—Electrical bandspread.
3—1.4 volt tubes used throughout.
4—Battery life prolonged through a self-contained charging circuit.
5—Automatic noise limiter.
6—Self-contained collapsible antenna which can be extended to nearly 3 feet.
7—An RF stage used on all bands.
8—Sensitivity below two microvolts on all bands.
9—High gain antenna coupling circuit for maximum antenna energy transfer.
10—Approximate battery life 100 hours.
11—Neon lamp to indicate tubes are lighted.
12—Permeability tuned RF and IF circuits.

FREQUENCY RANGE:
Band 1—542 to 1490 kc., Band 2—1.43 to 4.35mc., Band 3—4.12 to 11.9mc., Band 4—11.26 to 30.5mc.

TUBE LINEUP:
1—1T4 RF Amplifier; 1—1R5 Mixer; 1—1P5-GT 1st. IF Amplifier; 1—1P5-GT 2nd. IF Amplifier; 1—1H5-GT 2nd. Detector, AVC, 1st. audio; 1—3Q5-GT Output Amplifier; 1—1G4-GT Beat Oscillator; 1—1G4GT Noise Limiter; 1—50Y6GT Rectifier.

CONTROLS:
Main Tuning, Bandspread, R. F. Gain, A. F. Gain, Band Switch, Power Switch, AVC OFF-ON Switch, BFO OFF-ON Switch, ANL OFF-ON Switch, Send-Receive—Standby Switch.

CONNECTORS:
Doublet Marconi Antenna Socket, Phone Jack, Battery Cable with Plugs, AC/DC Outlet Cord.

PHYSICAL CONSTRUCTION:
Attractive black crackle finished aluminum cabinet substantially constructed to withstand hard usage. All corners of the cabinet are rounded for convenience in carrying. The one piece aluminum chassis is so designed for the greatest rigidity consistent with the least weight.

DIMENSIONS:
7" high—8½" wide—13¼" deep.
Weight including all batteries: 18 lbs.

The Model S-29 SKY TRAVELER (SKYER)..... NET **$59.50**

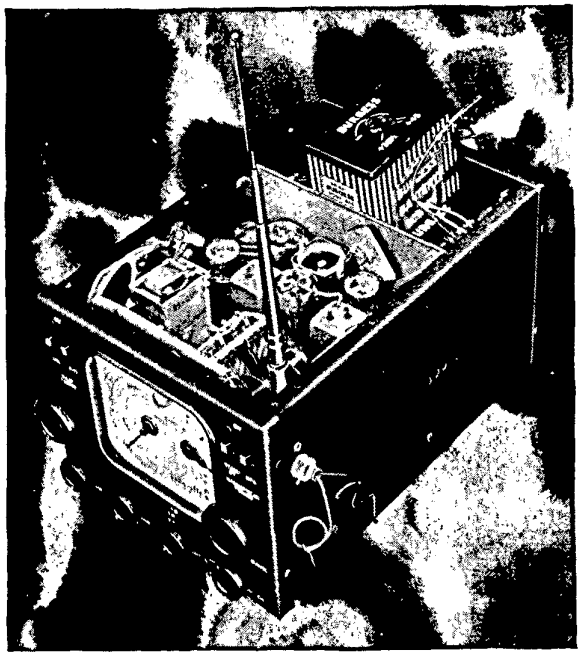

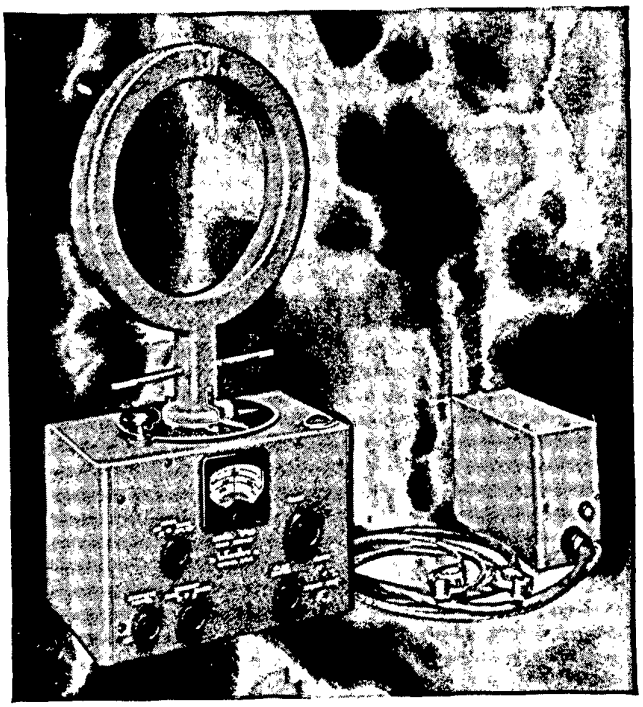

S-30 RADIO COMPASS

Know your location! The Model S-30 Radio Compass and direction finder enables you to check your position against beacon, broadcast or shore radiophone stations. Coverage from 200 to 3000 kc. (1500 to 100 meters). Sensitive headphones and tuning eye serve as indicators when taking a bearing. Normally used with a 6 volt battery. Has provisions for external speaker, should such an accessory be used. The controls on the Model S-30 Radio Compass have been kept to an absolute minimum consistent with ease and speed of operation. Substantially constructed, attractively finished aluminum cabinet houses the receiver and supports the rotating loop antenna. Power supply is in separate cabinet.
Place a Model S-30 Radio Compass on board and have the assurance of knowing your position anytime.

SPECIFICATIONS

FREQUENCY RANGE: Beacon Band—220 to 540kc. —Broadcast Band—535 to 1340kc.—Marine Band—1200 to 3000kc.
TUBE LINEUP: 1—6SK7 RF Amplifier; 1—6K8 Mixer; 1—6SK7 IF Amplifier; 1—6SQ7 2nd Detector—AVC; 1—6U5G Tuning Indicator; 1—6G6G Output Amplifier.
CONTROLS: Main Tuning; RF Gain; AF Gain; Band Switch; Phone Jack; Speaker headphone switch; Compass card adjustment.
POWER: Standard power unit consists of thoroughly filtered vibrapack for 6 volt battery operation.
SPEAKER: A 5" Permanent Magnet Dynamic Speaker is available as an accessory.
PHYSICAL CONSTRUCTION: The Model S-30 Radio Compass is built in a welded aluminum cabinet with a durable wrinkle finish. A 12" loop is mounted in an aluminum casting. No magnetic materials are used whenever possible. All magnetic parts such as speaker and vibrapack are separate units for mounting at a distance from the compass itself.
DIMENSIONS: 11" wide—10⅝" deep: 7½" high—overall height: Including loop—23½".
Model S-30 RADIO COMPASS: Complete with tubes, headphones and 6 volt vibrapack power supply. NET PRICE (RADCO)_____ **$99.50**
Separate Emergency Battery Box complete—NET PRICE (BATBX)_____ **19.45**

RADIOTELEPHONES

Since the days of the first "CQD" for help, radio has played an important part in communications on the high seas. For years it required thousands of dollars for equipment and trained professional telegraph operators. Hallicrafters engineers spent several years simplifying powerful transmitting and receiving apparatus to make radiotelephones practical for use on small craft by yachtsmen without technical radio training.
The Federal Communications Commission opened the way in recent years for an entirely new technical development—the Marine Radiotelephone. Now you can use on your boat, without knowledge of radio, a Radiotelephone.
All around our sea coasts and the Great Lakes, privately owned shore radio stations have been opened. From your boat you can "telephone" one of these stations, and they in turn will connect you by regular phone land line to any telephone anywhere. The service is now simplified so a Radiotelephone on your boat is as necessary as the telephone in your home.
The Federal Communications Commission requires two licenses for the boat owner, but they are easy to obtain. The station license, which carries with it a set of call letters, is applied for by filling out FCC form No. 501 with a statement as to the ownership of the boat and the type of marine equipment to be installed. The second license needed is a Third Class Commercial Operators License which may be held by any member of the crew—a citizen of the United States. This license requires no technical knowledge but merely an understanding of simple radio law. Information for obtaining this license can be procured from the local FCC inspector. Other persons besides the operator are perfectly free to use the Radiotelephone as long as the one holding the license is in attendance. Any kind of business, personal or emergency conversations can be carried on.

TYPE OF EQUIPMENT

There are three classifications of Radiotelephones. They differ very little except in the range of the transmitter. A small FLOTILLA type model should cover under normal conditions a 50 mile radius, usually sufficient for inshore and flotilla work. The receiver section has the broadcast band, too, for entertainment.
A very practical model is the CRUISING type. Its range is about 125 miles in the daytime and twice that far at night—depending entirely on conditions, height of antenna, etc.
The SEAGOING model will supply all the power you need for anything up to a world cruise. Under most conditions its transmitting range is greater than 250 miles. With ideal conditions it could easily reach 1000 miles. (Each of these models is described in complete technical detail elsewhere in this catalog.)

RADIOTELEPHONE OPERATION

Operation is very similar to using an ordinary telephone. When you hear your call letters on the loudspeaker, you simply lift the telephone handset from the hook and talk. You speak in a normal tone of voice. There are no tuning operations necessary. (Ringing systems are available for both the CRUISING and SEAGOING Models which ring a bell like a telephone when there is an incoming call for you.)
In making outgoing calls, select the station you wish to talk to, turn the switch on the front panel to their frequency and speak their call letters. Under usual circumstances they will answer immediately. A convenient chart on the front of the instrument shows the switch settings for each channel to be used.

the hallicrafters inc.

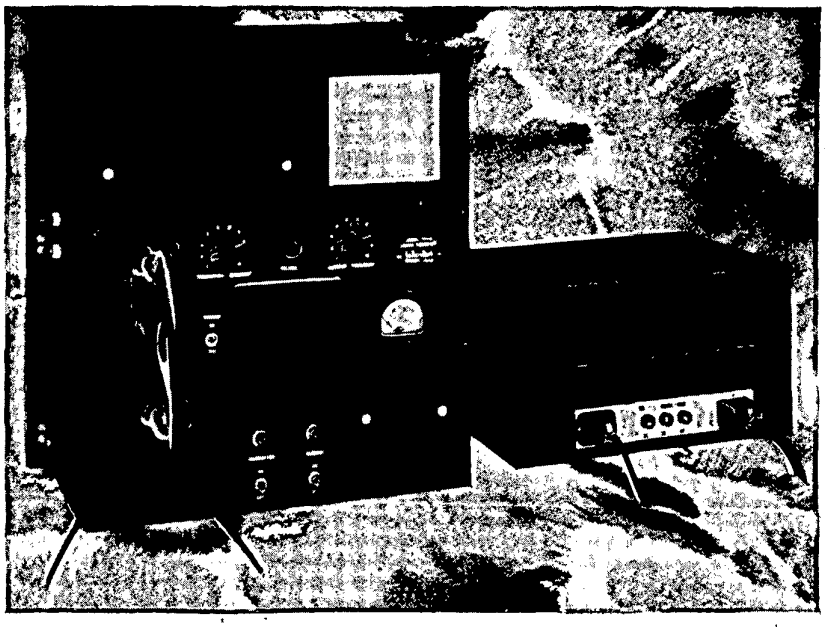

THE SEAGOING (MODEL HT-12) RADIOTELEPHONE

The Model HT-12—50 watt Radiophone answers every marine radio need! Ten crystal controlled transmitting and receiving channels provide communications with shore stations wherever you cruise.

Power supplies available for operation on 12-32-110 DC and 110 volt-60 cycles AC.

Either press-to-talk or voice controlled operation by merely throwing a switch.

Attractively finished in machine tool gray wrinkle lacquer, the durable rust proofed cabinet is suitable for either table or bulkhead mounting—the HT-12 will provide the maximum in safety and convenience.

Radiotelephones are now a modern necessity—as necessary as the telephone in your home. They give you ship-to-ship, Coast Guard, and ship-to-shore communications wherever you cruise.

POWER SUPPLY: The power supply is a separate unit. A 110 volt 60 cycle AC power supply is standard and is furnished with a rotary converter for 32 or 110 volt DC operation. Where 12 volt DC is used, the power supply consists of a heavy duty vibrapack for the receiver and a dynamotor for the transmitter—both mounted in a single unit.

PHYSICAL CONSTRUCTION: Heavy metal cabinet suitable for table or bulkhead mounting. Corrosion protected treatment throughout. Exterior of unit finished in attractive, durable machine-tool gray wrinkle, after complete rust proofing treatment.

TUNING ADJUSTMENT: Readily accessible controls for resonating transmitter are covered by easily removed protective face plates. Tuning adjustments are made only at time of installation.

DIMENSIONS OF RADIOPHONE: 20½" high—19¼" wide—12" deep. Complete with tubes, less crystals and installation but with power supply for 110 volt 50/60 cycles. NET (TRATW)..... **$390.00**

MODEL HT-12: Same as above but for 32 or 110 volts DC operation as specified..... **$470.00**

MODEL HT-12: Same as above but for operation from 12 volts DC..... **$525.00**

SPECIFICATIONS

FREQUENCY RANGE: 10 crystal transmitting and receiving channels in range of 2000—3000kc. When specified, two of these channels can be used for operation in the range of 3000 to 6700kc.

TUBE LINEUP: 1—6L6 Oscillator; 2—807 Power Amplifier; 1—6J5 Input Audio Amplifier; 4—6L6G Modulators.

RECEIVER: 1—6SK7 RF Amplifier; 1—6SA7 Mixer; 1—6SJ7 HF Oscillator; 1—6SK7 IF Amplifier; 1—6SQ7 2nd Detector—QAVC; 1—6SF5 Audio Amplifier; 1—6K6G Output Amplifier; 1—6X5G Rectifier; 2—5Z3 Rectifiers.

CONTROLS: Only controls which are used by the Operator are accessible on the front panel. Receiver—ON-OFF Switch; Transmitter filaments Switch; Receiver channel Switch; Transmitter channel Switch; Receiver volume control; Speaker ON-OFF Switch. Hand set on Hanger.

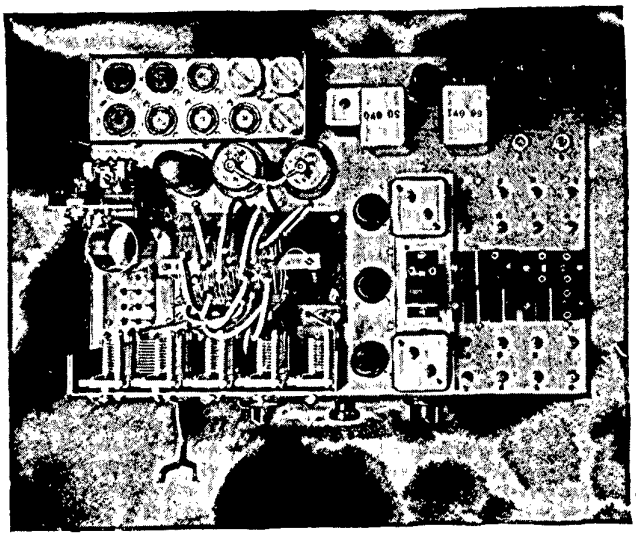

the hallicrafters inc.

12 watt Marine Radiophone Unit

(MODEL HT-11)

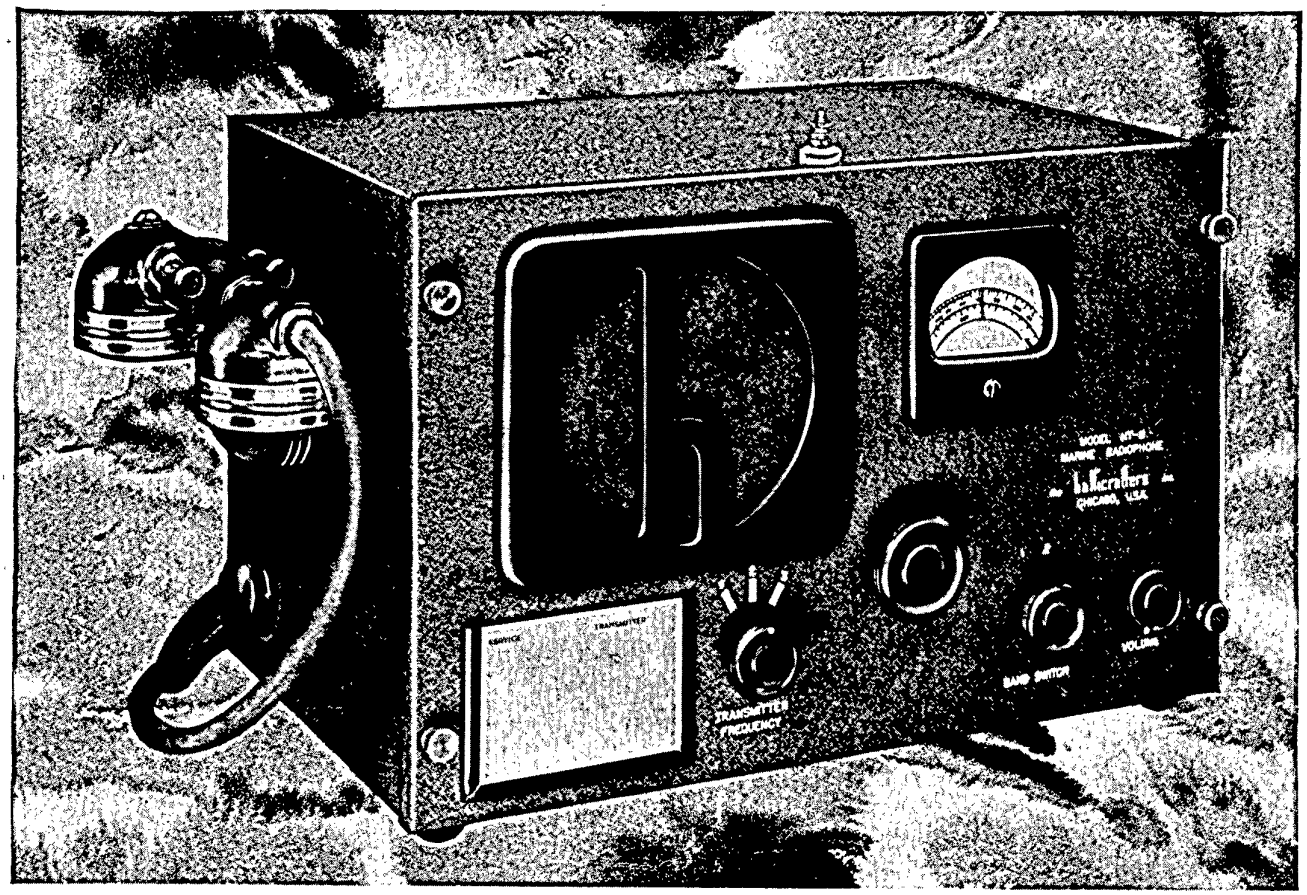

The FLOTILLA Model HT-11 Marine Radiophone is a complete moderately priced ship to shore radio transmitter and receiver. The transmitter can be operated on three frequencies in the marine band of 2000 to 3000 kc. The receiver is manually tuned and covers the standard broadcast band on range No. 1. Range No. 2 covers the marine channels. The separate noiseless vibrapack power supply is supplied for 6 or 12 volt DC operation. Other voltages can be used with suitable converter.

SPECIFICATIONS

FREQUENCY RANGE: Transmitter—3 crystal controlled frequencies in the range of 2000 to 3000 kc. Receiver: Manually tuned with directly calibrated dial. Band 1—550 to 1700 kc. Band 2—2000 to 3000 kc.

TUBE LINEUP: Transmitter 1—6V6 Oscillator; 1—807 Power Amplifier; 2—6V6G Modulators. Receiver: 1—6SK7 RF Amplifier; 1—6K8 Mixer; 1—6SK7 IF Amplifier; 1—6SQ7 2nd Detector—AVC—1st Audio; 1—6K6G Audio Amplifier; 2—6X5G Rectifiers.

CONTROLS: Transmitter channel switch; Receiver Band Switch; Receiver Volume control and ON-OFF switch; Receiver tuning; Standby switch; Speaker headphone switch; Handset with Send-Receive push button.

POWER SUPPLY: The HT-11 power supply is a separate unit connnected to the transmitter-receiver with a cable. The standard power pack is for 6 or 12 volt DC operation as specified. The same power supply is used for both voltages and easily converted from one to the other. Also available is a 110 volt-60 cycle AC power supply which may be used with a rotary converter for 32 or 110 volt DC operation.

PHYSICAL CONSTRUCTION: The small sturdy metal cabinet can be easily mounted on a table or shelf. Rust proofing and corrosion protective used throughout.

DIMENSIONS: 14⅛" wide—8⅝" high—9¼" deep.

MODEL HT-11 RADIOPHONE: Complete with tubes and power supply for 6 or 12 volt DC operation as specified—less crystals and installation NET (TRAEL)..... **$159.50**

HT-11 same as above but for 110 volt AC **149.50**

32 or 110 volt DC converter for use with above model HT-11..... **46.00**

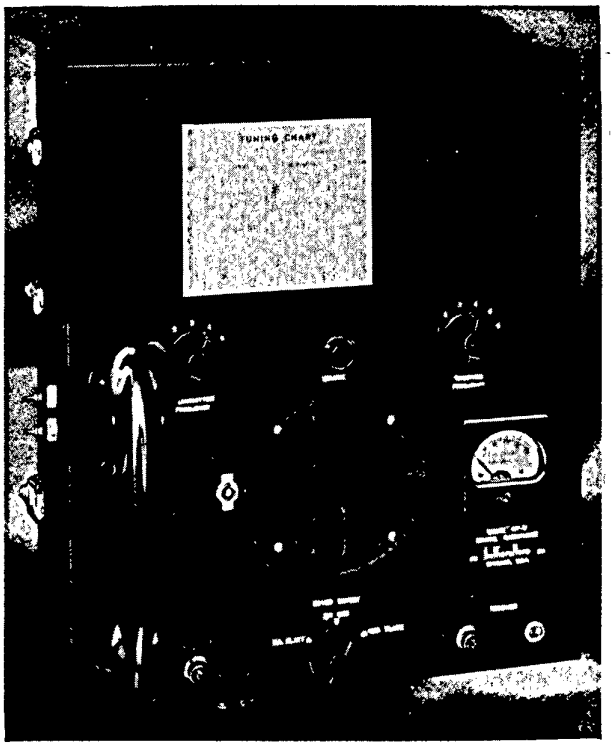

THE CRUISING
(MODEL HT-8)

The HT-8 radiotelephone transmitter-receiver is the ideal unit for any type of craft, commercial or pleasure. It is designed to operate equally well on sailboat, power cruiser, large yacht, fishing boat, tug, barge or freighter.

The transmitter covers five frequencies and the receiver six frequencies (all crystal controlled). All are in the 2000-3000 range: or, if desired, two may be in the 3000-6700 range. When the telephone handset is lifted off the hook, the receiver output automatically transfers from the built-in loud speaker to the handset. To transmit, simply press the botton on the handset and speak into the microphone.

SPECIFICATIONS

25 watts phone carrier. Five marine frequencies. Separate power supply. Quartz crystal controlled transmitter and receiver. Simple to operate. Precision built. 7-tube receiver. Effective squelch circuit. Handset or speaker output. No tuning required after installation. Modern design. Economical to operate. Low in purchase cost.

The very effective squelch circuit prevents static and noise from appearing in the loud speaker output when no carrier is present. Hence, the receiver may be left tuned to any station frequency without annoying bursts of static drumming on the ears.

MODEL HT-8—Bulkhead type. Dimensions 15" x 10" x 18" high. Shipping weight 105 lbs. Complete with tubes, separate power supply for 12, 32, or 110 volts DC as specified (all operate on 110 volt 60 cycle AC). Less crystals and installation.

(TRABL)..... **$290.00**

THE SKYRIDER MARINE
(MODEL S-22R)

Specifically designed for marine service, in the range from 16.2 to 2150 meters (18.5 mc. to 110 kc.). Improved image rejection at the higher frequencies is achieved through the use of 1600 kc. IF Amplifier. The directly calibrated main tuning dial eliminates the use of complicated charts and tables. An efficient mechanical bandspread with separate dial provides easy logging. Frequency range has been extended down to 110 kc. Calling and working frequencies lie in same band. Variable mica condensers are especially treated to maintain adjustment under continuous exposure to salt sea atmosphere.

SPECIFICATIONS

Built for 110 volt AC-DC operation. Also may be operated from 6 volt battery supply with the addition of a Model No. 302 Electronic Converter. Dimensions 18½" x 9¼" x 8½" high. The SKYRIDER MARINE (Model S-22R). Complete with tubes and speaker. Shipping weight 31 lbs.

(SKYCU)..... **$64.50**

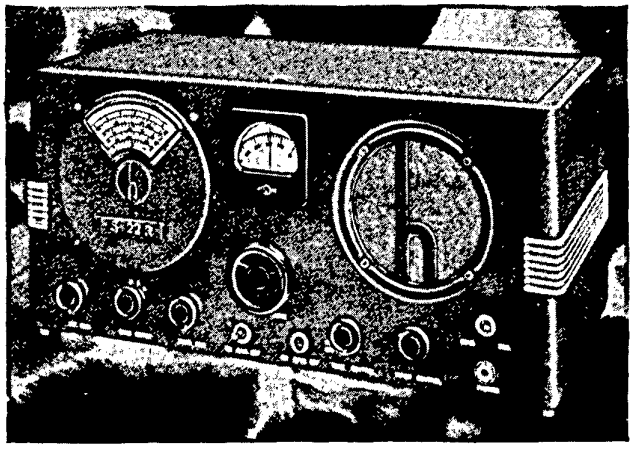

the hallicrafters inc.

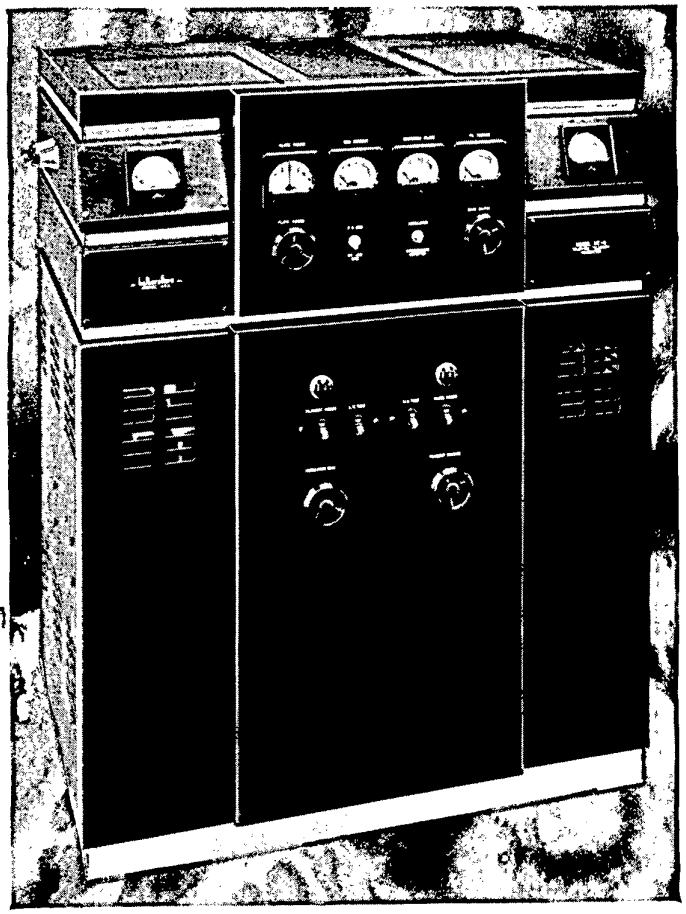

any three amateur bands (10 to 160) and HT-5 pre-amplifier. Dimensions: 29" x 19" x 37" high.

Shipping weight 550 lbs. (TRACO) **$695.00**

Additional set of coils for any one amateur band (10 to 160) **26.00**

FREQUENCY STANDARD
(MODEL HT-7)

The HT-7 Frequency Standard consists of a stable crystal oscillator providing either 1000 kc. or 100 kc. output, together with a 10 kc., multi-vibrator and a harmonic amplifier. A switch on the front panel selects harmonics of 1000 kc., 100 kc. or 10 kc. With output fed into any good communications receiver accurate marker frequencies at 1000 kc., 100 kc. or 10 kc. appear across the dial. The Frequency of the 100 kc. crystal is adjustable over a narrow range, so that it is possible to set its frequency to zero beat with either WWV or domestic broadcast stations, and once set will maintain its frequency accurately over long periods of time. Unequalled for checking transmitter frequency, and receiver calibrations. Also for calibrating and bandsetting receivers, locating signals for skeds, and setting ECO frequency. For operation on 110 volt 50-60 cycle. Shipping weight 10 lbs. Dimensions 5½" x 8" x 7½" high.

MODEL HT-7—Complete with tubes and crystal. (TRAFR) **$29.50**

Extra for Univ. 110-250 volts, 25-60 cycles **5.00**

HT-4 450 WATT

The HT-4 is intended for those who want the BEST in an efficient, high-powered rig. The carrier output is 325 watts on phone and 450 watts on CW. The HT-5 preamplifier, supplied with the transmitter, may be mounted at the operating position, controlling volume, keying and standby. Thus, once adjusted to any band the rig may be operated remotely. The transmitter may be set to any three of the 10, 20, 40, 80, and 160-meter bands. Subsequent selection of any of the three frequencies is by a switch on the front panel.

SPECIFICATIONS

Tubes: 1—6F6 crystal oscillator, 1—6L6 doubler, parallel RK39's-bufferdriver, 1—RK63 final amplifier, PP-2A3 driver, PP-RK38 modulators, 2—5Z3, 2—866 rectifiers. The HT-5 preamplifier uses 1—6J7, 3—6J5, 1—80. For operation from 110 volts 50-60 cycles AC. Available for special frequencies. Write for prices.

MODEL HT-4—Complete with tubes, crystals, coils for

the hallicrafters inc.

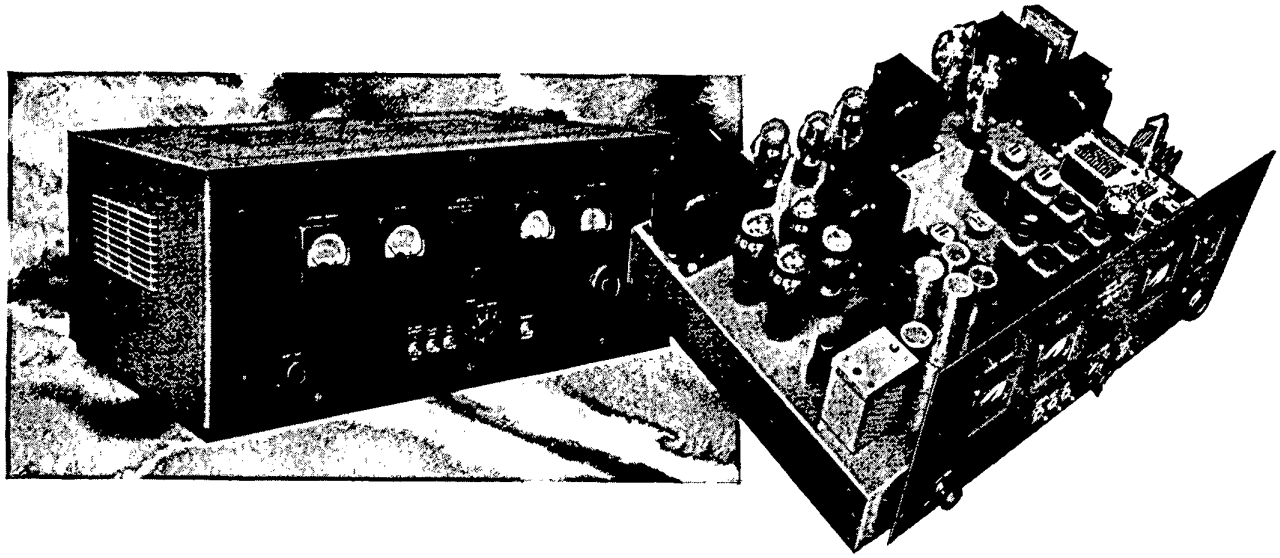

HT-9 100-WATT TRANSMITTER

Performance and price of this transmitter made possible by the facilities of the World's Largest Builders of Communications Equipment. Your cost on parts alone would exceed the price we ask for this complete transmitter.

The HT-9 is a 5-frequency phone and CW unit, rated at 100 watts on CW and 75 watts on phone (carrier OUTPUT). Coils are available for all bands from 1.7 to 30 megacycles. Exciter coils for five bands can be plugged in, pretuned, and left in the transmitter. Bandswitch, controls and meters, governing every function of the transmitter, are all on the front panel. 100% modulation with very low distortion is assured. Carrier hum is at least 40 db below 100% modulation. Any medium-level high impedance type of microphone can be used.

SPECIFICATIONS

14 Tubes—1-6F6 Oscillator, 1-6L6 Doubler, 1-814 Power Amplifier, 1-6J7 Audio Input Amplifier, 1-6J5 Audio Amplifier, 4-6L6G PP Parallel Modulators, 2-866 High Voltage Rectifier, 1-5Z3 Exciter Rectifier, 1-5Z3 Audio Rectifier, 1-80 Audio Rectifier. For operation from 110 volts, 50-60 cycles AC. Dimensions: 28" wide, 18½" deep, 11½" high. Any 5 frequencies in range 1.7 to 30 megacycles. Crystals and tuning units for all circuits up to the grid of the final amplifier are plugged and tuned in for each frequency channel desired. Antenna coil will match any resistive load from 10 to 600 ohms. Frequency response is flat within 3 db from 100 to 7000 cycles.

MODEL HT-9—Complete with tubes, but less crystals and coils. Shipping weight 165 lbs. (TRANI)	**$199.50**
160-80-40 meter coils (for operation on crystal frequency) each set	**6.65**
20-10 meter coils (for operation on twice crystal frequency), each set	**8.95**
160-80-40 meter crystals, each	**4.80**
20 meter crystals (for 10 meter operation), each	**5.75**

HT-6 25-WATT PHONE AND CW TRANSMITTER

The HT-6 gives you exacting transmitter performance, using an 807 in the final stage. The power output is 25 watts on most bands. Frequency range is 1.7 mc. to 60 mc. Coils for any three bands may be plugged in, pretuned, and then switched at will by a control on the front panel, which properly connects all circuits from crystal to antenna.

Tube complement: 1-6L6 Osc.-dblr., 1-807 final R. F. amplifier, 1-6F5 microphone amplifier, 1-6J5 Audio amplifier, 2-6L6G modulators and 2-5Z3 rectifiers. Power drain about 120 watts CW and 225 watts phone. Size—20" long, 9" high, 15" deep. For operation on 110 volts 50-60 cycle AC.

MODEL HT-6—Transmitter with tubes, less coils and crystals. Ship. wt. 67 lbs. (TRANO)	**$99.00**
Coils for 160, 80, 40 or 20 meter operation, each set	**4.95**
E. C. O. unit for 160, 80, 40 or 20 meter operation for corresponding coils listed above, each	**3.65**
Set of coils for 5 or 10 meter operation on twice crystal frequency, each set	**6.95**
Random Frequency Crystal for 160, 80, 40 meters, each	**4.80**

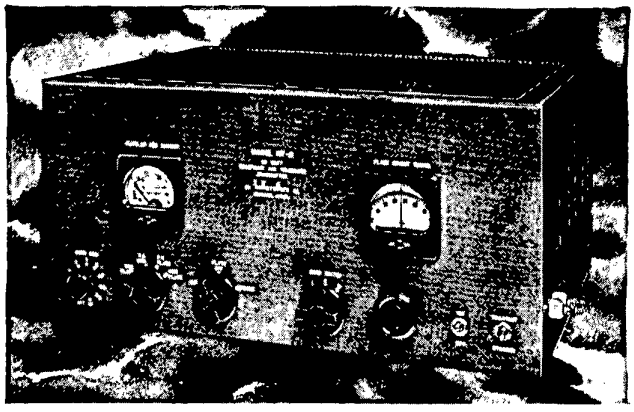

Random Frequency Crystal for 20, 10 and 5 meters, each	**5.75**
Extra for 220 volt 50-60 cycle operation	**7.50**

the hallicrafters inc.

THE hallicrafters HOME

The Hallicrafters occupy the top three floors of this building in the 2600 block of Indiana Avenue, Chicago. In 1937 one floor was sufficient. The fact that the firm has trebled in size is recognition of the policy of constant engineering progress plus the most scientific production methods. Government requirements and specifications are carefully followed. All radio communications equipment is built for immediate use by amateurs, commercial firms, laboratories or the 33 Governments supplied by the Hallicrafters.

INDEX

Model	Page	Model	Page
SX-28	2	S-20R	11
SX-28 (Features)	3	S-29	12
SX-28 (Circuits)	4	S-30	13
SX-28 (Specifications)	5	HT-12	14
SX-25	6	HT-11	15
SX-24	6	HT-8	16
S-27	7	S-22R	16
S-31	8	HT-4	17
SX-23	9	HT-7	17
S-21	9	HT-9	18
S-19R	10	HT-6	18

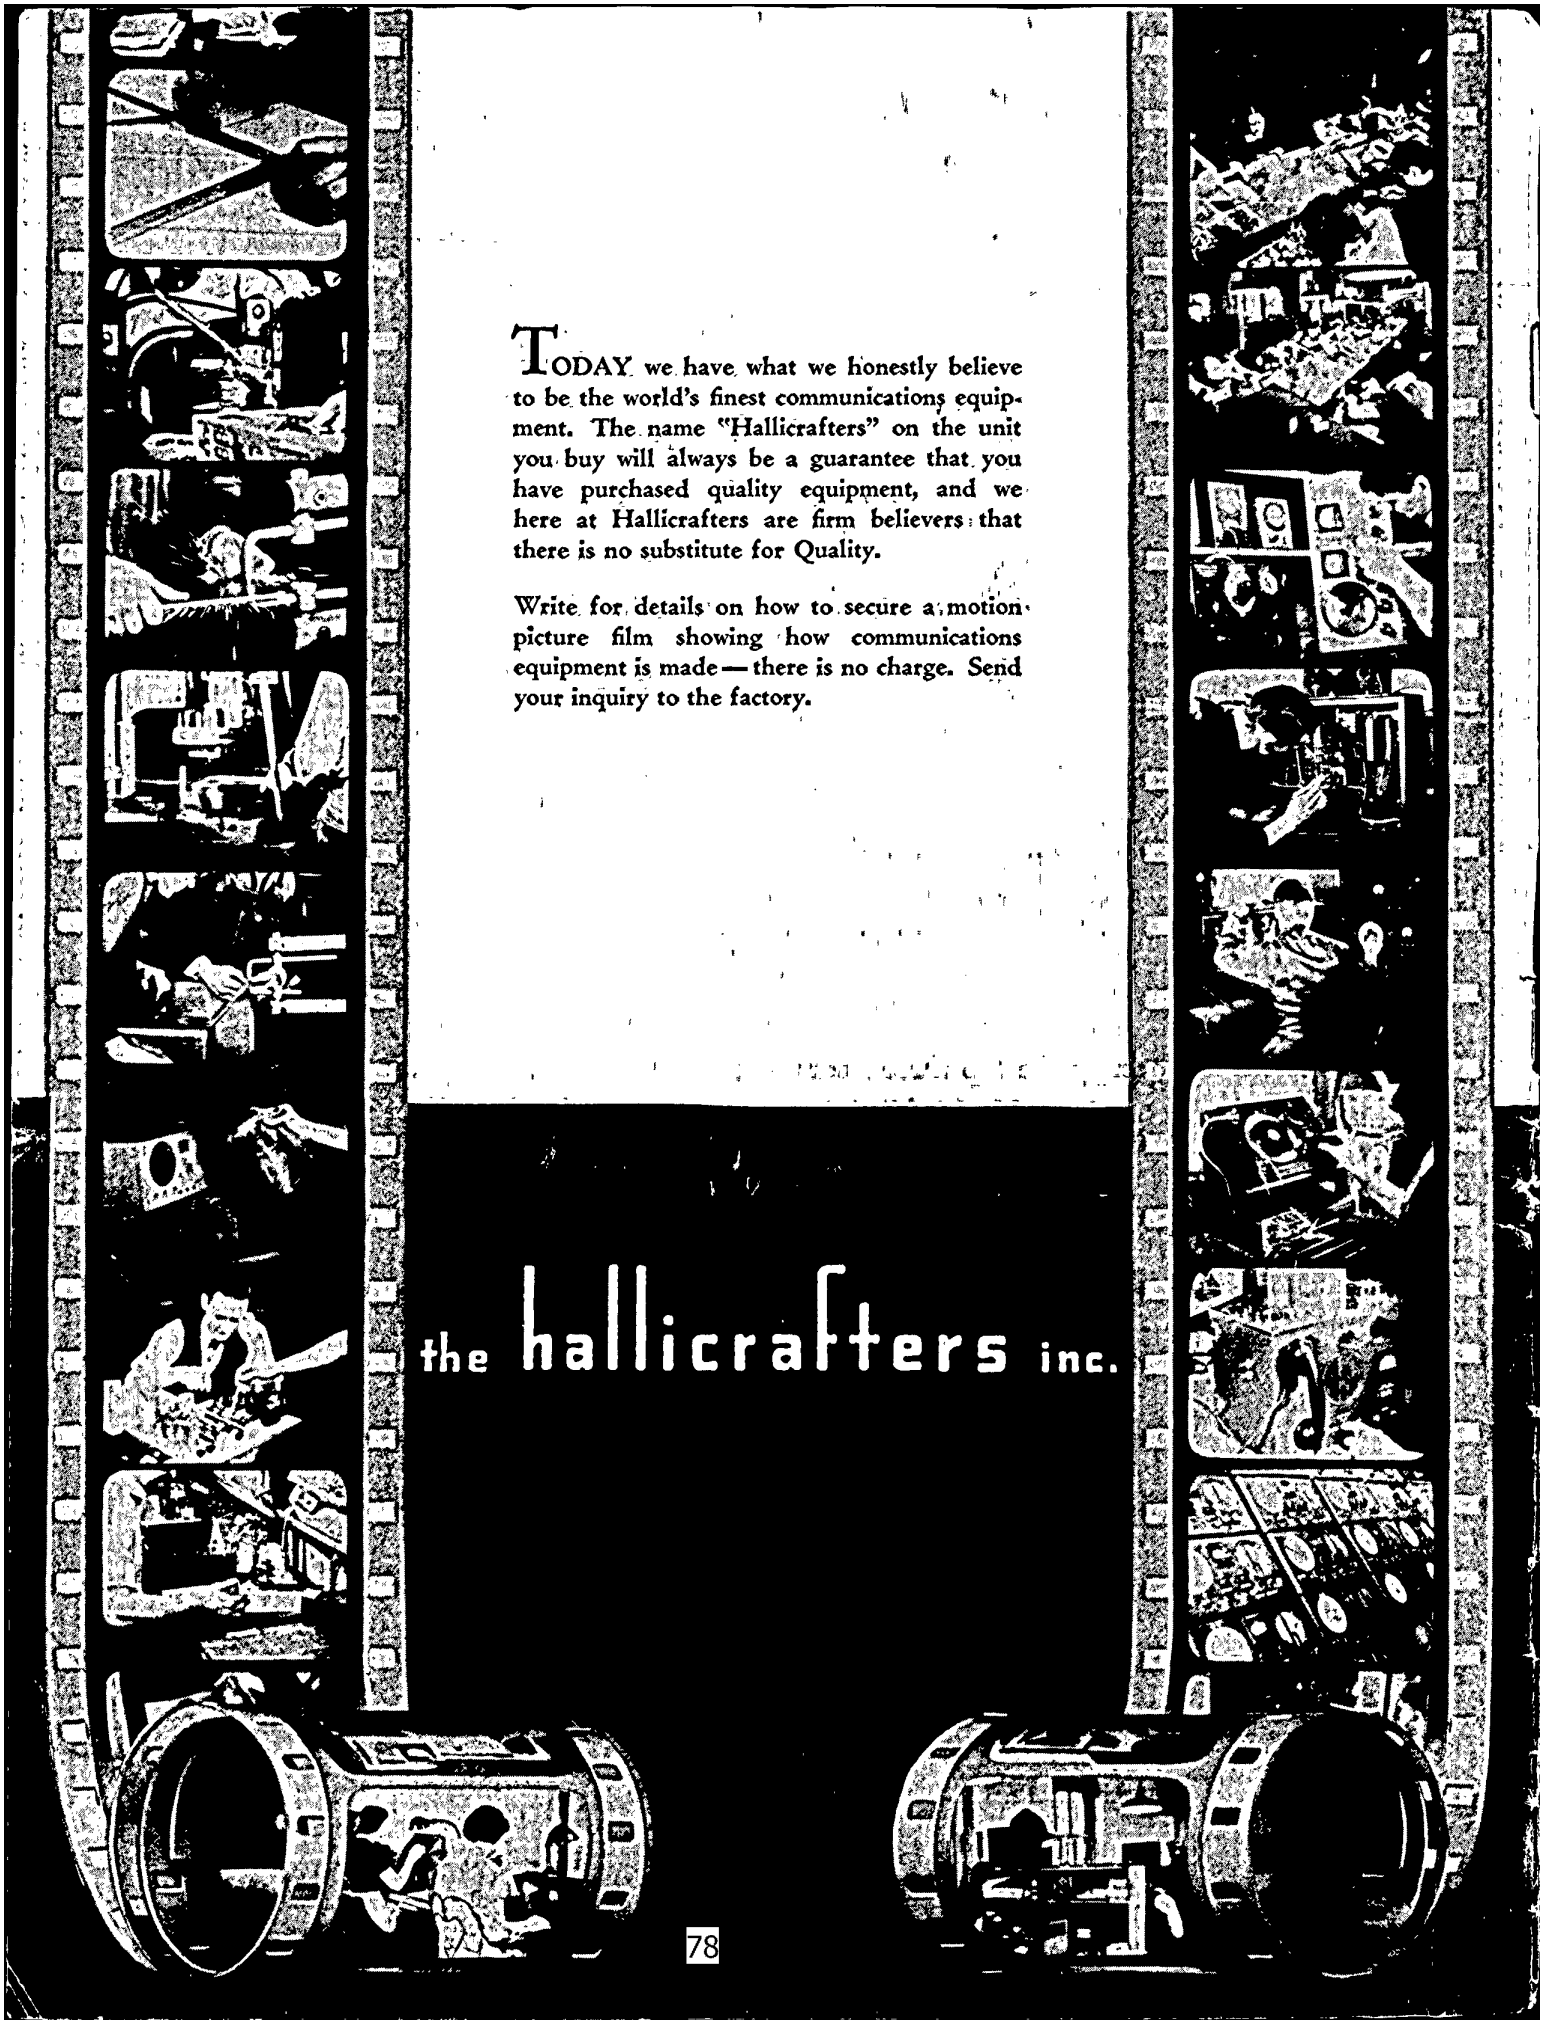

TODAY we have what we honestly believe to be the world's finest communications equipment. The name "Hallicrafters" on the unit you buy will always be a guarantee that you have purchased quality equipment, and we here at Hallicrafters are firm believers that there is no substitute for Quality.

Write for details on how to secure a motion picture film showing how communications equipment is made — there is no charge. Send your inquiry to the factory.

the hallicrafters inc.

7-66 (Rev. 5-19-72)

1 - [redacted]

b6
b7C

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

SAC, Albany 8/12/74

Director, FBI (80-646-1)

TECHNICAL EQUIPMENT
CW RADIO STATION
NETWORK

☐ Equipment listed below has been received. After repairs have been made it will be returned to your office.

☐ Equipment listed below has been repaired and is being returned to your office.

☒ Equipment listed below is being shipped to your office for ☐ permanent ☒ temporary assignment. ~~Appropriate inventory changes should be made.~~

☐

One Technical Materiel Corporation XFK-2RF exciter, serial number 32845.

NOTE:
Albany's XFK-2 unit is being shipped to the Laboratory for repair. Serial number 32845 is from the Midland training transmitter.

JTF:bms
(4)

80-646-1

NOT RECORDED
2 AUG 12 1974

MAILED 12
AUG 12 1974
FBI

BJW/RAM/BBV

58 AUG 14 1974 F67

MAIL ROOM ☐ TELETYPE UNIT ☐

L-6

FEDERAL BUREAU OF INVESTIGATION

Laboratory

Date 3/12/1 1941

____	Mr. Allen	7118	____	Mr. LaRock	7325E
____	Mr. Appel	1410	____	Mr. Magee	7325C
____	Mr. Baughman	7325D	____	Mr. Martin	7326
____	Mr. Beach	7325F	____	Mr. McCarthy	7325C
____	Mr. Blackburn	1410	____	Mr. McKenna	7330
____	Mr. Blaine	1410	____	Mr. Mesnig	1410
____	Mr. Burgess	7328	____	Mr. Millen	7118
____	Mr. Chadduck	7325E	____	Mr. Miller	1410
____	Mr. Coffey	7326	____	Mr. Murray	7325D
____	Mr. Conrad	7120	____	Mr. Napier	1410
____	Mr. Couch	7325D	____	Mr. Parsons	7325D
____	Mr. Dingle	1410	____	Mr. Pfafman	7120
____	Mr. Dunlop	7325F	____	Mr. J. Willard	7325D
____	Mr. Feehan	1410	____	Mr. White	7325F
____	Mr. Felton	7325D	____	Mr. Williams	7118
____	Mr. Freimuth	7325F	____	Miss Frawley	7326
____	Mr. Gasteiger	1410	____	Typing Pool	7332
____	Mr. Holland	1410	____	LABORATORY FILES	
____	Mr. Hughes	7325D			
____	Mr. Jevons	7325E	____	Mr. _____	
____	6th FLOOR FILES				

Please File with

80 — 6446 — 1

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

See Me ____
Please Handle ____
Route to #1 Examiner ____

RWS

E. P. COFFEY

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Federal Bureau of Investigation
United States Department of Justice

CHICAGO, ILLINOIS

February 3, 1941

Director
Federal Bureau of Investigation
Washington, D. C.

Attention: TECHNICAL LABORATORY

Dear Sir:

Reference is made to telephone conversation had with MR. COFFEY, who requested that catalogues relating to CW radio transmitters of two power ranges - one 40 watts and the other 120 watts - and catalogues relative to 500 and 1,000 watt transmitters of CW radio transmitters be obtained from the HALLICRAFTERS COMPANY and from the THORDARSON COMPANY be obtained if possible.

There is being transmitted, herewith, a catalogue obtained from the THORDARSON COMPANY covering 500 and 1,000 watt transmitters, and two catalogues obtained from the HALLICRAFTERS COMMUNICATIONS EQUIPMENT COMPANY covering CW radio transmitters of two ranges, 40 and 120 watts respectively.

Reference is also made to the request of MR. COFFEY that a Scientific Coil and Wire Company be contacted to ascertain if they have on the market a portable direction finder, also known as a radio compass, which works on ground waves, applicable to work on 7,000 and 14,000 kilocycle wave bands. It is further noted that inquiry be made relative to whether or not any of this equipment is available at the present time; and also, if such equipment is available, that the cost of same be ascertained.

Please be advised that contact was had with [redacted] of the above company, who advised that at the present time they have no equipment available which cover the above kilocycle wave bands. [redacted] stated, however, that they do have on hand a range finder applicable to work on 150 to 10,000 kilocycles which could be changed to cover the ranges of 7,000 to 14,000 kilocycles. He stated in this regard that this set is a very compact unit, sealed against exposure to any moisture whatsoever and against any atmospheric changes, and that the sensitivity of this set is of the highest quality. He informed that the battery consumption of this unit is only 7/10 of a watt, and that the unit will operate for a period of at least three hundred hours.

b6
b7C

RECORDED
&
INDEXED

80-646-1

FEDERAL [illegible]
1 [illegible] 1941
U S [illegible]

[redacted] also advised that at the present time no cost or sales price has been affixed to this unit, inasmuch as it has not as yet been fully completed. He said he would be unable to give any definite cost to this unit at the present time. [redacted] went on to state that the above unit is one of the most satisfactory units, he believed, they had so far perfected. He remarked that he would not be able to give any definite price to this unit as set out above until approximately two days from the date of this letter. b6 b7C

He was advised in this regard that in submitting prices for these units, the prices be given to cover various quantities of the units inasmuch as it is not known by this office the number desired by the Bureau.

As stated above, [redacted] advised that although this direction finder, or radio compass, manufactured by them only covers ranges from 150 to 10,000 kilocycles, it could be very easily changed over to cover ranges so as to work on ranges from 7,000 to 14,000 kilocycles wave bands. As soon as the figures are obtained from [redacted] relative to this unit, same will be forwarded to the bureau immediately. b6 b7C

[redacted] also advised that his company did not have on hand any of the above catalogues covering 500 and 1,000 watt transmitters of CW radios.

Very truly yours,

W. S. DEVEREAUX
Special Agent in Charge

MES:GCW

AMASD

Encls.

JOHN EDGAR HOOVER
DIRECTOR

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Federal Bureau of Investigation
United States Department of Justice
Washington, D. C.

RLM:DMS

February 14, 1941

MEMORANDUM FOR MR. LADD

Re: C. W. Radio Communication Network.

There is outlined below a progress report on the above-entitled project to date.

Specific attention thus far has been devoted primarily to links between San Diego, California and Honolulu, T. H. in one instance and between San Diego, California and Juneau, Alaska in the other instance. A check on frequencies suitable for use in transmitting between San Diego and Juneau, Alaska reveals that a relatively large number of frequencies would be required, including unusually low frequencies for use during magnetic storm disturbances. Further inquiry reveals that both the Army and Navy connections with Alaska operate out of Seattle, Washington and that difficulty has been experienced in relays between San Diego and Seattle, Washington. Accordingly, it is recommended that no attempt be made to install a link from San Diego directly to Juneau, Alaska and that consideration instead be given to operation out of Seattle or Portland, Oregon.

In connection with the link between San Diego and Honolulu, a review of material compiled by the National Bureau of Standards from actual receptions of radio signals indicated that at least three and probably four frequencies would be required to provide day and night communication during summer and winter conditions as shown below:

RECORDED & INDEXED.

Summer day	Summer Night	Winter day	Winter night
1350 to 1650 kilocycles	6200 to 11800 kilocycles	12100 to 28500 kilocycles	3000 to 8000 kilocycles

80 346-1X

MAR 18 1941

LADD

CHF. CLK.

I ENCL. FM

Three other sources of information were then checked to indicate more specifically the frequencies required for this coverage, these were namely the Federal Communications Commission, the Army Signal Corps and the Navy Department.

b6
b7C

[redacted] associated with the International Broadcasting Section of the Federal Communications Commission, advised that frequencies in the vicinity of 17,000 to 21,000 kilocycles would be required for daytime operation, moving down to 9,000 and 6,000 kilocycles for evening and night operation. (An informal statement of these requirements furnished by [redacted] to Mr. Conrad is attached to this report.) [redacted] of the International Radio Telegraph Section furnished several releases by the Federal Communications Commission from which it was definitely ascertained that commercial companies communicating between San Francisco and Honolulu utilized several frequencies agreeing generally with the above figures. A detailed statement of some of this data is attached to this report. Attention is invited to the fact that the power of these communication stations ranged from 20 kilowatts up to 80 kilowatts.

b6
b7C

Major [redacted] of the Radio Liaison Division of the War Department advised specifically that 10 kilowatt transmitters with directional antennas were employed for communication between San Francisco and Honolulu and that four frequencies were required to maintain day and night communication throughout the year between these points. These frequencies are used for the times and seasons as set forth below.

San Francisco - Honolulu, two-way.
Winter

8 P. M. to 4 A. M. - 4,300 kilocycles.
4 A. M. to 10 A. M. - 8,600 kilocycles.
10 A. M. to 3 P. M. - 12,900 kilocycles.
3 P. M. to 8 P. M. - 8,600 kilocycles.

Summer

8 P. M. to 4 A. M. - 8,600 kilocycles.
4 A. M. to 10 A. M. - 12,900 kilocycles.
10 A. M. to 3 P. M. - 17,200 kilocycles.
3 P. M. to 8 P. M. - 12,900 kilocycles.

Commander [redacted] of the Radio Liaison Division of the Navy Department advised specifically that 25 kilowatt transmitters with directional antennas were employed for communication between San Francisco and Honolulu and that four frequencies were required to maintain day and night communication throughout the year. These frequencies are used for the times and seasons as set forth below. b6 b7C

San Francisco - Honolulu,
Winter

Estimated time	Frequency San Francisco	Frequency Honolulu
10 P. M. to 2 A. M.	5965 kcs.	5865 kcs.
2 A. M. to 9 A. M.	8090 kcs.	9050 kcs.
9 A. M. to 2 P. M.	11580 kcs.	11475 kcs.
2 P. M. to 7 P. M.	8090 kcs.	9050 kcs.

Summer

10 P. M. to 2 A. M.	8090 kcs.	9050 kcs.
2 A. M. to 9 A. M.	11,580 kcs.	11475 kcs.
9 A. M. to 2 P. M.	16150 kcs.	16250 kcs.
2 P. M. to 7 P. M.	11580 kcs.	11475 kcs.

It is noted that the lowest frequency used by the Navy is approximately 5800 kilocycles; however, Commander [redacted] advised that his men were now seeking a frequency nearer 4000 kilocycles to supplement the above frequencies. This would bring the Navy frequencies in very close agreement with Army frequencies, both of which are in general agreement with the Bureau of Standards and Federal Communications Commission information. Accordingly, it is felt that frequencies in the indicated regions should be sought by the Bureau. b6 b7C

In connection with the power requirements, attention is invited to the fact that the power presently employed by organizations discussed above ranges from 10 kilowatts to 80 kilowatts. It is understood, however, that the Bureau requires

only scheduled contact rather than continuous communication, and it is therefore felt that with suitable antenna facilities, a minimum power of 1000 watts should be reasonably satisfactory.

In connection with the possibility of installing suitable receiving and transmitting antennas on the roof of office buildings, it would be impractical to install such antennas for frequencies lower than about 7000 kilocycles. This fact would eliminate much of the night contact. For the day frequencies, such antennas might be installed at a height of 30 to 40 feet requiring an actual area approximately 70 feet by 25 feet, clear on all sides. However, in the opinion of Mr. Conrad and Mr. Millen, it is doubtful whether satisfactory results could be obtained with such antennas on the roof, since both the receiving and transmitting ability would be considerably impaired. Receiving conditions particularly are seldom satisfactory in an relatively large office building.

A suggested alternative involves the renting or leasing of a private dwelling and associated grounds, on which proper antenna systems might be erected. As indicated above, it is believed that under such conditions and with the power indicated, reasonably reliable scheduled contact could be maintained.

A second, less desirable alternative would require the use of higher powered transmitting equipment, operating in conjunction antenna systems on top of the office buildings. It is roughly estimated that approximately 5 kilowatts of power would be required under such conditions, and even more in the event of unusually noisy receiving conditions.

In connection with the actual purchase of transmitting equipment, catalogs have been requested from all of the major manufacturing companies, telegraphic inquiries having been made in some instances, and a further report will be submitted upon their receipt. A canvas of local companies for such equipment failed to disclose anything of suitable power.

Hammarlund communication receivers have been shipped to Honolulu and Juneau to be available at those points for testing and subsequent use. These offices, as well as the San Diego office, have also been instructed to furnish information concerning the availability of antennae and a description of the office roofs as well as the availability of local operators for possible temporary use.

As described in a separate memorandum, [redacted] has volunteered the use of his radio station at Pasadena, California, and it is believed that this would be very useful for testing purposes in further engineering this system if the Bureau does approve its use for that purpose. b6 b7C

In connection with the possibility of developing means for transmitting signals from the field by Agents in operation specifications have been sent you for the purchase of two small 30 watt portable transmitters.

The work on the whole plan is continuing rapidly and you will be kept advised as to progress.

Respectfully,

E. P. Coffey.

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

COPY RCA REPORTS, JULY - SEPTEMBER

SAN FRANCISCO TO HONULULU K.C.	HOURS TRAFFIC	HONOLULU TO SAN FRANCISCO in K.C.	HOURS TRAFFIC
7715	217	7370	291
9010	131	7520	21
11950	42	10090	147
13690	11	11680	262
13780	128	14807.5	1020
15430	812	16030	1223
15460	3	17980	24
15475	158		
20800	3		

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

February 7, 1941

Each international broadcast station is assigned several frequencies to permit of coverage of countries at various distances during daytime, nighttime, and various seasons of the year. If it is desired to cover a country 2000 miles north during the middle of the day, frequencies in the order of 17,000 to 21,000 kilocycles would be employed. Toward night, the frequency would be lowered, and at nighttime, it may be found that 6000 or 9000 kilocycles would be more suitable. At any event, the higher frequencies (20,000 kilocycles) are virtually useless at nighttime. This same general principle obtains with respects to covering a country west 2000 miles, except that the daylight period over the entire path is not as long and a change to a ~~longer~~ lower frequency at an early hour would be required. To do a good job at any distance in the order of 2000 miles requires the use of several available frequencies, shifting from the higher frequencies in the middle of the day to the lower frequencies at night. On any specific coverage problem, the frequencies are worked out from long records, taking into account diurnal and seasonal variations. Often two or more frequencies must be used during the transition periods to insure continuity of service, which in any event are not 100 per cent reliable.

OK
asr

Informal Statement
Furnished by [redacted] F.C.C.
on Feb 8, 1941

b6
b7C

80-646-1X

NATIONAL COMPANY, INC.

WILLIAM A. READY, PRESIDENT
JAMES J. FREELEY, SALES MANAGER
WARREN B. HOPKINS, CHAIRMAN OF BOARD
WALTER H. BALCKE, TREASURER

ENGINEERS AND MANUFACTURERS
CABLE ADDRESS "NATCO" BOSTON
WESTERN UNION CODE
61 SHERMAN STREET
MALDEN, MASS.

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

February 11, 1941.

Mr. John Edgar Hoover,
Federal Bureau of Investigation,
United States Department of Justice,
Washington, D. C.

Dear Mr. Hoover:-

In response to yours of February 6th, we are enclosing a copy of our latest catalog that briefly describes our products. We are also including a complete set of technical bulletins that further describe our completely assembled receiving and transmitting units.

If any further information is desired on any item, it will be gladly furnished upon request.

Very truly yours,

NATIONAL COMPANY, INC.

J. J. Freeley

Sales Manager.

J. J. Freeley

JJF:M
Encls.

Encl. detached
Lab. rlm 2-17-41
no ans required

RECORDED & INDEXED

P 80-646-1X1

FEDERAL B...
5 FEB ... 1941
U.S. DEPARTMENT OF ...

CHF. CLK.

SALES OFFICES

NEW YORK · CHICAGO · LOS ANGELES · SEATTLE · DALLAS

CC-91a

FEDERAL BUREAU OF I[redacted]GATION

From: Chief Clerk's Office Room 5515

2/17 1941

To:

____Director	____Mr. Nichols
____Mr. Nathan	____Mr. Q. Tamm
____Mr. Tolson	____Mr. Harbo
____Mr. Clegg	____Mr. Hendon
____Mr. Foxworth	____Mr. Pennington
____Mr. Ladd	____Ident. Division
____Mr. Glavin	____Files Section
____Miss Gandy	____Mechanical Section
____Mr. Egan	____Personnel Files
____Mr. E. A. Tamm	____Washington F. D.
____Mr. Coffey	____Supply Division
____Mr. Tracy	____Division of Accounts
____Mr. Hince	____Mr. Patterson
____Mr. Rosen	____Mr. Renneberger
____Mr. Belmont	
____Mr. Douglas	____M _____
____Mr. Gauthier	
____Mr. Johnson	
____Mr. Long	
____Mr. Piper	
____Mr. Poster	
____Mr. Scott	
____Mr. Spears	
____Mr. Trost	
____Mr. Wilcox	
____Mr. _____	____Block and Route
See Me____	____Mail Room
Phone Me ____	____Tech. Laboratory
Send File____	

Approved?

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

R. H. Laughlin

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:DMS

RECORDED 46-1X2

March 3, 1941

Mr. Frank Lyman, Jr.
President
Harvey Radio Laboratories, Incorporated
447 Concord Avenue
Cambridge, Massachusetts

Dear Mr. Lyman:

Reference is made to your letter of February 11, 1941 to this Bureau relative to radio transmitting equipment.

In connection with your inquiry as to general requirements for the equipment mentioned in my letter to you dated February 6, 1941, please be advised that this Bureau is primarily interested in obtaining data on 1000-watt transmitters for C W operation only. This equipment shall in general be capable of operation in a frequency band from 5000 kilocycles to 20000 kilocycles and be constructed of good quality materials for intermittent service. In this instance, portability is not a factor and at present, no quotation as to satisfactory price range, is available.

Trusting this additional information will be of assistance to you, I am

Sincerely yours,

John Edgar Hoover
Director

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nease
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ MAR 3 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

OK
RLM

HIGH FREQUENCY RADIO EQUIPMENT FOR POLICE, MARINE, AMATEUR AND GENERAL COMMUNICATION SERVICES

HARVEY RADIO LABORATORIES, INC.

[redacted] Street — Cambridge, Mass.

447 CONCORD AVENUE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

February 11, 1941

Federal Bureau of Investigation
U. S. Department of Justice
Washington, D. C.

Att: Mr. J. E. Hoover, Director
Ref: Your Letter of February 6, 1941

Gentlemen:

We are mailing you under separate cover complete instruction bulletins of our type 100-XE transmitter and our type 300-XE transmitter. These units were recently developed for the U. S. Army Engineer service in the Ohio River Division and incorporate what we consider conservative engineering practice in their design and construction.

Would it be possible for you to give us a little more precise data on what your requirements are and what price range you intend to purchase in? We have various units in the 500-1000 watt C.W. range available, but are not quite sure which one of these units comes nearest to your requirements.

Is the equipment you are about to buy to be of top grade quality for long years of service or are you installing some temporary communication links? Is portability an important factor? What frequency ranges do you expect to use? In short, if you can give us a little more information on just what your requirements are, we will try to be specific in our suggestions and quotations.

Very truly yours,

HARVEY RADIO LABS., INC.

RECORDED & INDEXED

Frank Lyman, Jr.

Frank Lyman, Jr.
President

FL Jr:SM

80-646-1X2

CHIEF CLERK'S LAB

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Harvey Radio Laboratories, Incorporated
25 Thorndike Street
Cambridge, Massachusetts

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED
80-646-2
4 FEB 12 1941
U S D

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

General Electric Company
Schenectady, New York

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED
40-646-3
4 FEB 12 19

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nendon
Mr. Rosen
Mr. Tracy
Miss Gandy

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Westinghouse Electric Company
East Pittsburgh, Pennsylvania

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED
80-646-4
4 FEB 12 1941
U.S. DEPT. OF JUSTICE

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Mendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P.M.
FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE

RECEIVED-DIRECTOR
FBI
FEB 6 7 08 PM '41
U.S. DEPT. OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Wilcox Electric Company, Incorporated
4014 State Line
Kansas City, Kansas

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED
80-646-5
4 FEB 12 1941
U.S. DEPARTMENT OF JUSTICE
RECEIVED-DIRECTOR
FEB 7 9 PM '41
FBI
DEPT OF JUSTICE

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Harvey Wells Communications, Incorporated
Southbridge, Massachusetts

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED 80-646-6

4 FEB 12 1941

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

RECEIVED-DIRECTOR
FEB 6 9 09 PM '41

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

National Company
61 Sherman
Malden, Massachusetts

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

80-646-7

RECORDED & INDEXED

FEB 12 1941

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Mendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
FEB 7 1941
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Browning Laboratories, Incorporated
750 Main Street
Winchester, Massachusetts

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nease
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

RECORDED & INDEXED
80-646-8
4 FEB 12 1941

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

DATE: 2-28-69

Re: TECHNICAL EQUIPMENT

TO:
SAC LOS ANGELES

Invoice of Contents

- ☐ Crypt.-Trans.
- ☐ Document
- ☒ P & C
- ☒ Radio Engineering
- ☐ LFPS

1 EA KEYLINE TIME DELAY UNIT FOR TMC GPT-750 TRANSMITTER

715929

MAILED 24
FEB 28 1969
COMM-FBI

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No.
80-646-9

VIA REGISTERED MAIL

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

DATE: 2-28-69

Re: TECHNICAL EQUIPMENT

TO: SAC SACRAMENTO

Invoice of Contents

- ☐ Crypt.-Trans.
- ☐ Document
- ☒ P & C
- ☒ Radio Engineering
- ☐ LFPS

1 EA KEYLINE TIME DELAY UNIT FOR TMC GPT-750 TRANSMITTER

MAILED 24
FEB 28 1969
COMM-FBI

715925

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No. 80-646-9

MAR - 4 1969

VIA REGISTERED MAIL

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

DATE: 2-28-69

Re: TECHNICAL EQUIPMENT

TO: SAC SAN FRANCISCO

Invoice of Contents

- ☐ Crypt.-Trans.
- ☐ Document
- ☒ P & C
- ☒ Radio Engineering
- ☐ LFPS

1 EA KEYLINE TIME DELAY UNIT FOR TMC GPT-750 TRANSMITTER

MAILED 24
FEB 28 1969
COMM-FBI

715927

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No. 80-846-9

53 MAR - 4 1969

VIA REGISTERED MAIL

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

DATE: 2-28-69

Re: TECHNICAL EQUIPMENT

TO: SAC NEW YORK

Invoice of Contents

- ☐ Crypt.-Trans.
- ☐ Document
- ☐ P & C
- ☒ Radio Engineering
- ☐ LFPS

1 EA KEYLINE TIME DELAY UNIT FOR TMC GPT-750 TRANSMITTER

MAILED 24
FEB 28 1969
COMM-FBI

715928

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No. 80-646-9

58 MAR 4 1969

☒ VIA REGISTERED MAIL

7-66 (Rev. 7-21-66)

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

1 - [redacted]

b6
b7C

80-646-9

February 27, 1969

Special Agent in Charge, Chicago

Re: TECHNICAL EQUIPMENT

Dear Sir: C. W. NETWORKS

☐ Equipment listed below has been received. After repairs have been made it will be returned to your office.

☐ Equipment listed below has been repaired and is being returned to your office.

☒ Equipment listed below is being shipped to your office for ☒ permanent ☐ temporary assignment. XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

☐

Keyline Time Delay Unit for installation on the TMC GPT-750 transmitter.

1 - Los Angeles
1 - Newark
1 - New York
1 - Sacramento
1 - San Francisco

MAILED 6
FEB 27 1968
COMM-FBI

NOTE:

80-646-9-

Units shipped directly from Laboratory.

NOT RECORDED
19 FEB 28 1969

RBH:sdh
(9)

Tolson
DeLoach
Mohr
Bishop
Casper
Callahan
Conrad
Felt
Gale
Rosen
Sullivan
Tavel
Trotter
Tele. Room
Holmes
Gandy

MAR 3 - 1969

MAIL ROOM ☐ TELETYPE UNIT ☐

Very truly yours,

J. Edgar Hoover

John Edgar Hoover
Director

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

DATE: 2-28-69

Re: TECHNICAL EQUIPMENT

TO:
SAC NEWARK

Invoice of Contents

- ☐ Crypt.-Trans.
- ☐ Document
- ☒ P & C
- ☒ Radio Engineering
- ☐ LFPS

1 EA KEYLINE TIME DELAY UNIT FOR TME GPT-750 TRANSMITTER 715926

MAILED 24
FEB 28 1969
COMM-FBI

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No. 80-646-9

59 MAR - 4 1969

VIA REGISTERED MAIL

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

DATE: 2-28-69

Re: TECHNICAL EQUIPMENT

TO:
SAC CHICAGO

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Invoice of Contents

- ☐ Crypt.-Trans.
- ☐ Document
- ☒ P & C
- ☒ Radio Engineering
- ☐ LFPS

1 EA KEYLINE TIME DELAY UNIT FOR TMC GPT-750 TRANSMITTER

MAILED 24
FEB 28 1969
COMM-FBI

715924

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No.
80-646-9

53 MAR -4 1969

VIA REGISTERED MAIL

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Bassett Radio Manufacturing Corporation
Niles, Michigan

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED

80-646-9

FEB 12 19

FEB 8 7 09 PM '41

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Hendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Collins Radio
2920 1st Avenue
Cedar Rapids, Iowa

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

80-646-10
RECORDED & INDEXED
4 FEB 12 1941
U.S. Department of Justice

COMMUNICATIONS SECTION
MAILED
FEB 7 1941
P.M.
FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nendon
Mr. Rosen
Mr. Tracy
Miss Gandy

0-4a (Rev. 1-19-67)

FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C. 20535

DATE: 5/12/77 Re: TECH EQUIPMENT

TO: SAC, CHICAGO

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Invoice of Contents

- [ ] Crypt.-Trans.
- [ ] Document
- [ ] P & C
- [x] Radio Engineering
- [ ] LFPS

1 EA SS-1135 STAINLESS STEEL WHIP ANTENNA FOR USE WITH CW RADIO STATION.

Imperial Air Freight
#662148
5/12/77
WDO

Special Instructions:
Mail Room: Show shipment date and registry number.
Shipping Room: Show shipment date; bill of lading number; initial invoice; return to Section checked in block; after initialing in block, invoice to be placed in administrative file.

FBI File No. 80-646-9

"VIA AIR FREIGHT"
50 MAY 13 1977
198

157

FBI/DOJ

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

7-26a

[redacted]ice of Contents from
[redacted] BUREAU OF INVESTIGATI[redacted]
[redacted]ASHINGTON, D. C.

Date 6-9-51 Case References 80-646-11

Consigned to: SAC, San Diego

[redacted]

List of Contents

1 each MC-7 crystal, Freq. 7977.5 kc
1 each MC-7, crystal, Freq. 7247.5
2 each Magnetic overload relays

Mr. Harbo, 7625
Mr. Conrad, 7142
Mr. Downing, 6228 IB
Mr. Bowles, 7601
Mr. Parsons, 7121

497629

VIA REGISTERED MAIL

MAILED 13
JUN 9 1951
COMM-FBI

80-646-11

3 22

SPECIAL INSTRUCTIONS: Mail Room, place date of shipment and registry number; Shipping Room, show date of shipment and initial this invoice; then return it to person whose name is checked in column at right. After this checked name has been initialled, invoice should be placed in administrative file.

60 JUN 14 1951

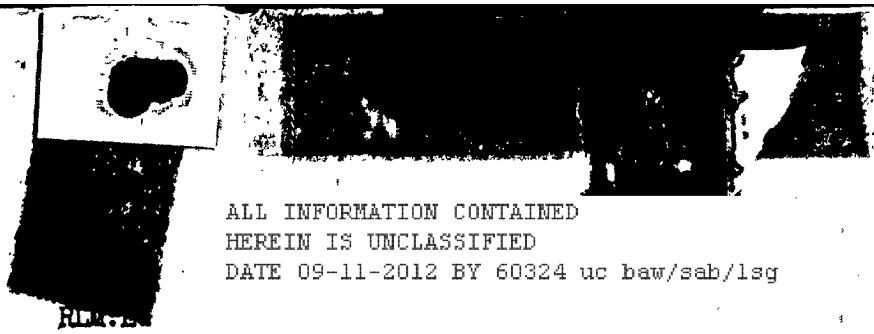

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

February 6, 1941

Doolittle and Falknor, Incorporated
7421 South Loomis Boulevard
Chicago, Illinois

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Rendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
FEB 7 1941
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

RECORDED & INDEXED

80-646-11

FEB 12 19[illegible]

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Calvin Manufacturing Company
4545 Augusta Boulevard
Chicago, Illinois

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Hendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

RECORDED & INDEXED
80-646-12
FEB 12 1941
U.S. DEPT. OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

Bendix Radio
920 East Fort Avenue
Baltimore, Maryland

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED

80-646-13

4 FEB 12 1941

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Hendon
Mr. Rosen
Mr. Tracy
Miss Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 6, 1941

James Millen Manufacturing Company,
Incorporated
150 Exchange Street
Malden, Massachusetts

Gentlemen:

This Bureau is interested in obtaining at an early date, all the available information which you may have concerning radio transmitting and receiving equipment.

In connection with the radio transmitting equipment, any detailed data or catalogs pertaining to radio transmitters of 100 watts to 1000 watts will be appreciated.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED & INDEXED
80-646-14
4 FEB 12 1941

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Rendon
Mr. Rosen
Mr. Tracy
Mr. Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RLM:EG

February 10, 1941

Western Electric Company
300 Central Avenue
Kearney, New Jersey

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

RECORDED & INDEXED

John Edgar Hoover
Director

80-646-15

FEB 13 1941

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Mendenhall
Mr. Rosen
Mr. Tracy
Mr. Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 10 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

R.L.M.

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

RDM:EG

February 7, 1941

Transmitter Equipment Manufacturing
Company
130 Cedar Street
New York, New York

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P.M.
FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE

RECORDED 80-6146-16
4 FEB 12 1941

Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Nathan
Ladd
Egan
Glavin
Mr. Nichols
Mr. Mendon
Mr. Rosen
Mr. Tracy
Miss Gandy

yr rdm 75

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

LM:EG

February 7, 1941

RCA Manufacturing Company
Front and Cooper Streets
Camden, New Jersey

Gentlemen:

This Bureau is interested in obtaining at an early date, descriptive literature concerning radio transmitting and receiving equipment made by your company.

In connection with the radio transmitting equipment, the Bureau is presently interested in both small transmitters of 100 watts or less and 500 and 1000 CW_0 transmitters.

Thanking you in advance for your cooperation in this matter, I remain

Very truly yours,

John Edgar Hoover
Director

RECORDED
&
INDEXED

80-646-17

4 FEB 12 1941
U.S. DEPARTMENT OF JUSTICE

Mr. Tolson
Mr. Glavin
Mr. Nichols
Mr. Mendon
Mr. Rosen
Tracy
Gandy

COMMUNICATIONS SECTION
MAILED
★ FEB 7 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

7-66 (Rev. 11-18-69)

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

1 - [redacted] b6 b7C

80-646

August 25, 1971

Special Agent in Charge, Honolulu

Re: TECHNICAL EQUIPMENT
C.W. Network

Dear Sir:

☐ Equipment listed below has been received. After repairs have been made it will be returned to your office.

☐ Equipment listed below has been repaired and is being returned to your office.

☐ Equipment listed below is being shipped to your office for ☐ permanent ☐ temporary assignment. Appropriate inventory changes should be made.

☐ **For the information of your radio operators, the recommended approximate optimum frequencies for September, 1971, from Honolulu to San Diego are:**

GMT	MHz (CW)	MHz (FSK)	GMT	MHz (CW)	MHz (FSK)
0000	20	20	1200	10	10
0200	18	18	1400	9	9
0400	16	16	1600	12	13
0600	12	12	1800	18	18
0800	11	11	2000	18	18
1000	11	11	2200	20	20

This information is intended as a guide for frequency changes or off-schedule calls.

80-646-18

CMM:meh
(4)

MAILED 23
AUG 25 1971
FBI

NOT RECORDED
AUG 25 1971

Very truly yours,

J. Edgar Hoover

John Edgar Hoover
Director

51 AUG 27 1971

MAIL ROOM ☐ TELETYPE UNIT ☐

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

CC-150

BUREAU OF INVESTIGA
ATES DEPARTMENT OF J

To: COMMUNICATIONS SECTION. EPC:AF FEBRUARY 7 1941

b6
b7C

Transmit the following message to: [redacted]

COMMERCIAL SALES, RADIO DIVISION
GENERAL ELECTRIC COMPANY
SCHENECTADY NEW YORK

FORWARD AT ONCE CATALOG INFORMATION FIVE HUNDRED AND ONE THOUSAND WATT CW TRANSMITTERS, ALSO CW TRANSMITTERS HUNDRED WATT AND LESS.

JOHN EDGAR HOOVER
DIRECTOR
FEDERAL BUREAU OF INVESTIGATION

PREPAID

80-646-18

FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION

FEB - 7 1941

WESTERN UNION

SENT VIA _____ 8 011 M Per _____

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION
FEB - 7 1941

WESTERN UNION

BI 20 2-7-41 8-04 PM GOVT PREPAID

[redacted] b6 b7C

COMMERCIAL SALES, RADIO DIVISION

GENERAL ELECTRIC COMPANY

SCHENECTADY NEW YORK

FORWARD AT ONCE CATALOG INFORMATION FIVE HUNDRED AND ONE THOUSAND WATT WC XXX CW TRANSMITTERS, ALSO CW TRANSMITTERS HUNDERXXX HUNDRED WATT AND LESS.

JOHN EDGAR HOVVEXXX HOOVER

DIRECTOR

FEDERAL BUREAU OF INVESTIAXXX INVESTIGATION

CC-150

FEDERAL BUREAU OF INVESTIGATION
UNITED STATES DEPARTMENT OF JUSTICE

To: COMMUNICATIONS SECTION. EPC:AF FEBRUARY 7 1941

Transmit the following message to: COLLINS RADIO COMPANY
2920 FIRST AVENUE
CEDAR RAPIDS IOWA

AS REQUESTED MY LETTER SIXTH INSTANT, FURNISH BY AIRMAIL CATALOG INFORMATION FIVE HUNDRED AND ONE THOUSAND WATT CW TRANSMITTERS ALSO CW TRANSMITTERS HUNDRED WATT OR LESS.

JOHN EDGAR HOOVER
DIRECTOR
FEDERAL BUREAU OF INVESTIGATION

PREPAID

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Police Commissioner

Mr. Tolson
Mr. E. A. Tamm
Mr. Clegg
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Glavin
Mr. Nichols
Mr. Hendon
Mr. Rosen
Mr. Tracy
Miss Gandy

RECORDED & INDEXED

FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION
FEB - 7 1941

80-646-18
FEDERAL BUREAU OF INVESTIGATION
2 FEB 8 1941
U.S. DEPARTMENT OF JUSTICE

WESTERN UNION

SENT VIA _____ 8 09 PM Per _____

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION
FEB 7 1941

WESTERN UNION

BI 21 2-7-41 8-06 PM GOVT PREPAID

COLLINS RADIO COMPANY

2920 FIRST AVENUE

CEDAR RAPIDS IOWA

AS REQUESTED MY LETTER SIXTH INSTANT, FURNISH BY AIRMAIL CATALOG INFORMATION FIVE HUNDRED AND ONE THOUSAND WATT CW TRAMSXXX TRANSMITTERS ALSO CW TRANSMITTERS HUNDRED WATT OR LESS

JOHN EDGAR HOOVER

DIRECTOR

FEDERAL BUREAU OF INVESTIGATION

CC-150

FEDERAL BUREAU OF INVESTIGATION
UNITED STATES DEPARTMENT OF JUSTICE

To: COMMUNICATIONS SECTION. EPC:AF FEBRUARY 8 1941

Transmit the following message to: RADIO ENGINEERING LABORATORIES
LONG ISLAND CITY
NEW YORK

PLEASE FURNISH DESCRIPTIVE LITERATURE SMALL AND LARGE CW TRANSMITTERS MANUFACTURED BY YOUR COMPANY.

JOHN EDGAR HOOVER
DIRECTOR
FEDERAL BUREAU OF INVESTIGATION

PREPAID

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

Radio Transmitter

EPC

RECORDED & INDEXED

80-646-20

FEDERAL ...
1 ... 10 ...

FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION
FEB - 8 1941
POSTAL

SENT VIA _____ 1:10 p M Per CAR

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION

FEB - 8 1941

POSTAL

BI 5 2-8-41 1-10 PM GOVT PREPAID

RADIO ENGINEERING LABORATORIES

LONG ISLAND CITY

NEW YORK

PLEASE FURNISH DESCRIPTIVE LITERATURE SMALL AND LARGE CW TRANSMITTERS MANUFACTURED BY YOUR COMPANY.

JOHN EDGAR HOOVER

DIRECTOR

FEDERAL BUREAU OF INVESTIGATION

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

0-4a (12-19-55)

[redacted]

of Contents from
FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D. C.

Date 8/30/57 Case References 80-646-21

Consigned to: SAC, Indianapolis Re Butech form 8/30/57

List of Contents

1 ea. Jack Bar

715774

Via Registered Mail

Mr. Parsons, 7621 ___
Mr. Conrad, 7621 ___
Mr. Beach, 7133 ___
Mr. Bowles, 7601 ___
Mr. Downing, 6228 IB ___
Mr. Millen, 7140 ___
Mr. Deiss, 6127 IB ___

SPECIAL INSTRUCTIONS: Mail Room, place date of shipment and registry number; Shipping Room, show date of shipment, bill of lading number and initial this invoice; then return it to person whose name is checked in column at right. After this checked name has been initialed, invoice should be placed in administrative file.

71 SEP 5 1957 Fwd 80-646-21

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-12-2012 BY 60324 uc baw/sab/lsg

FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE
COMMUNICATIONS SECTION

FEB - 8 1941

WESTERN UNION

Mr. Tolson
Mr. E. A. Tamm
Mr. Clegg
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Glavin
Mr. Nichols
Mr. Hendon
Mr. Rosen
Mr. Tracy
Miss Gandy
Coffey

X

WH10 16

WUX CEDARRAPIDS IOWA FEB 8 1027A

JOHN EDGAR HOOVER, DIRECTOR

FEDERAL BUREAU OF INVESTIGATION

REWIRE SEVENTH YOUR LETTER SIXTH NOT YET RECEIVED. IF YOU APPREHEND MISDIRECTION PLEASE FORWARD DUPLICATE LETTER

COLLINS RADIO CO.(

1154.

RECORDED & INDEXED

80-646-21

FEDERAL BUREAU OF INVESTIGATION
5 FEB 1941
U.S. DEPARTMENT OF JUSTICE

TOLSON (LABS)

Material rec'd by let 2-10-41 [illegible] 2/12/41 [illegible]

DECLASSIFICATION AUTHORITY DERIVED FROM:
FBI AUTOMATIC DECLASSIFICATION GUIDE
DATE 03-29-2012

EPC:AF

February 8, 1941

~~CONFIDENTIAL~~

SPECIAL DELIVERY - AIR MAIL

Mr. R. L. Shivers
Federal Bureau of Investigation
U. S. Department of Justice
302 Dillingham Building
Honolulu, Hawaii

Dear Sir: Re: CW Radio Transmitters

For your confidential information the Bureau is presently assembling data concerning the feasibility of radio communication between San Diego or some other selected California city and Honolulu on a CW (or telegraphic) basis. Information is desired from you at this time as to the general quality of radio reception obtainable in your office. Information as to clarity of signal and as to difficulties experienced with static and electrical interference should be furnished. If your office is considered a favorable place for radio reception generally, then information will be desired as to the reception obtainable in certain specific frequency bands, i. e., approximately 14,000 kc. for day time reception, and 6,000 kc. and 4,000 kc. (approximately) for night time reception.

80-64-6-22

In order to make these latter determinations, a communications receiver, a suitable antenna on the roof of the building and the services of one who understands Bureau radio reception will undoubtedly be necessary. The Bureau is taking no steps at this time to provide these facilities pending receipt of information from you, first, as to the general radio reception conditions in your office and, secondly, as to the availability of such a communications receiver as a Hallicrafter, a National, or a Hammarlund perhaps obtainable on a rental basis for a short period in Honolulu, and information concerning the practicability of a suitable receiving antenna for the roof, if same presently exists. Information as to whether any of your Agents have had any experience in CW reception should also be submitted, and your office should keep in mind the possibility that it might be necessary to temporarily take on a special employee qualified in such radio reception.

FEB 14 1941

In addition to the question of a receiving antenna, the Bureau also desires more information concerning your present building location with a view to considering whether the same would be suitable for transmitting antenna in the event the establishment

COMMUNICATIONS SECTION
★ FEB 10 1941 ★
P. M.
FEDERAL BUREAU OF INVESTIGATION
U. S. DEPARTMENT OF JUSTICE

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Nease
Mr. Rosen
Mr. Tracy
Miss Gandy

SAC, Honolulu

of a transmitter in your office becomes desirable. A description of the location of the building and the approximate roof area and height should be furnished. Photographs of the building showing its location would be helpful as well as photographs of the roof area.

The San Diego office should at this time furnish similar information and photographs of its building location to the Bureau.

Very truly yours,

John Edgar Hoover
Director

cc-San Diego

Mr. Tolson
Mr. Clegg
Mr. E. A. Tamm
Mr. Foxworth
Mr. Nathan
Mr. Ladd
Mr. Egan
Mr. Glavin
Mr. Nichols
Mr. Nease
Mr. Rosen
Mr. Tracy
Miss Gandy

7-66 (Rev. 11-18-69)

1 - [redacted]

b6
b7C

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

80-646

August 25, 1971

Special Agent in Charge, Anchorage

Re: TECHNICAL EQUIPMENT
CW RADIO AND FSK

Dear Sir:

C.W. Network

☐ Equipment listed below has been received. After repairs have been made it will be returned to your office.

☐ Equipment listed below has been repaired and is being returned to your office.

☐ Equipment listed below is being shipped to your office for ☐ permanent ☐ temporary assignment. Appropriate inventory changes should be made.

☐ **For the information of your radio operators, the recommended approximate optimum frequencies for September, 1971, from Anchorage to San Diego are:**

GMT	MHz (CW) FOT	MHz (FSK) FOT	GMT	MHz (CW) FOT	MHz (FSK) FOT
0000	15	15	1200	7	7
0200	14	14	1400	9	9
0400	12	12	1600	12	12
0600	10	10	1800	14	14
0800	8	8	2000	14	14
1000	8	8	2200	14	14

This information is intended as a guide for frequency changes or off-schedule calls.

80-646-22

NOT RECORDED
5 AUG 25 1971

CMM:skj
(4)

Very truly yours,

J. Edgar Hoover

John Edgar Hoover
Director

MAILED 23
AUG 25 1971

54 AUG 26 1971

125

MAIL ROOM ☐ TELETYPE UNIT ☐

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 09-11-2012 BY 60324 uc baw/sab/lsg

TEL. WINCHESTER 2121

BROWNING LABORATORIES, INC.
760 MAIN STREET
WINCHESTER, MASSACHUSETTS
Manufacturers of Quality Radio Apparatus

February 10, 1941

Federal Bureau of Investigation
United States Department of Justice
Washington, D. C.

Attn: John Edgar Hoover, Director

Gentlemen:

This will acknowledge your letter of February 6 in regard to information concerning radio transmitters and receiving equipment. Most of the Browning Laboratory line is amateur equipment, as you will notice from the set of sheets covering the entire line which are being sent you under separate cover.

For the last six months we have been doing some very intensive work in conjunction with some of the power companies on a protective alarm system for property such as public utility, sub stations, generating plants, etc. The development of this apparatus is almost completed at the present time, and we believe that your organization would be interested in this equipment. We will have no literature available for we feel that, in general, publicity on this type of apparatus would not be to the advantage of those using the equipment.

Our organization would be most pleased to cooperate on any apparatus which could be utilized in advancing the preparedness program.

Cordially yours,

BROWNING LABORATORIES, Inc.

G. H. Browning

GHB/md

RECORDED & INDEXED 80-646-23

5

U.S. DEPT. OF JUSTICE

CHIEF CLERK'S OFFICE

FEDERAL BUREAU OF INVESTIGATION
FOIPA
DELETED PAGE INFORMATION SHEET

No Duplication Fees are charged for Deleted Page Information Sheet(s).

Total Deleted Page(s) ~ 1
Page 10 ~ Referral/Direct